

UNILIN

CLICK SYSTEM ASSEMBLAGE CLIC
UNILIN

WATER RESISTANT RÉSISTANT À L'EAU
AQUACORE

ANTIBACTERIAL ANTIBACTÉRIEN

STAIN RESISTANT RÉSISTANT AUX TACHES

PET FRIENDLY RÉSISTANT POUR ANIMAUX DE COMPAGNIE

ABRASION RATING COTE D'ABRASION
AC4

ECO FRIENDLY ÉCOLOGIQUE

CERTIFIED CARB ATCM 93120 SCS GLOBAL SERVICES
CalCompliant

CERTIFIED TSCA TITLE VI COMPLIANT SCS GLOBAL SERVICES
EPA Formaldehyde Emission Standard

floor score
CERTIFIED BY SCS Global Services

UL GREENGUARD
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818
GOLD

CANADA GREEN BUILDING COUNCIL · CONSEIL DU BÂTIMENT DURABLE DU CANADA ·

LIMITED WARRANTY GARANTIE LIMITÉE
LIFETIME POUR LA VIE
RESIDENTIAL | RÉSIDENTIEL

PARADIGM™ | PRO SOL® by/par utions

ENGINEERED HIGH DENSITY WATER RESISTANT FLOORING

PARADIGM™ | PRO SOL® by/par utions

ENGINEERED HIGH DENSITY WATER RESISTANT FLOORING





BISCOTTI PDM-01



CORNETTO PDM-02



CORTADO PDM-03



LATTE PDM-04



MACCHIATO PDM-05




MOCHA PDM-06

*Actual product colour may vary from the images shown.

PARADIGM™ | PRO SOL® by/par utions

ENGINEERED HIGH DENSITY WATER RESISTANT FLOORING

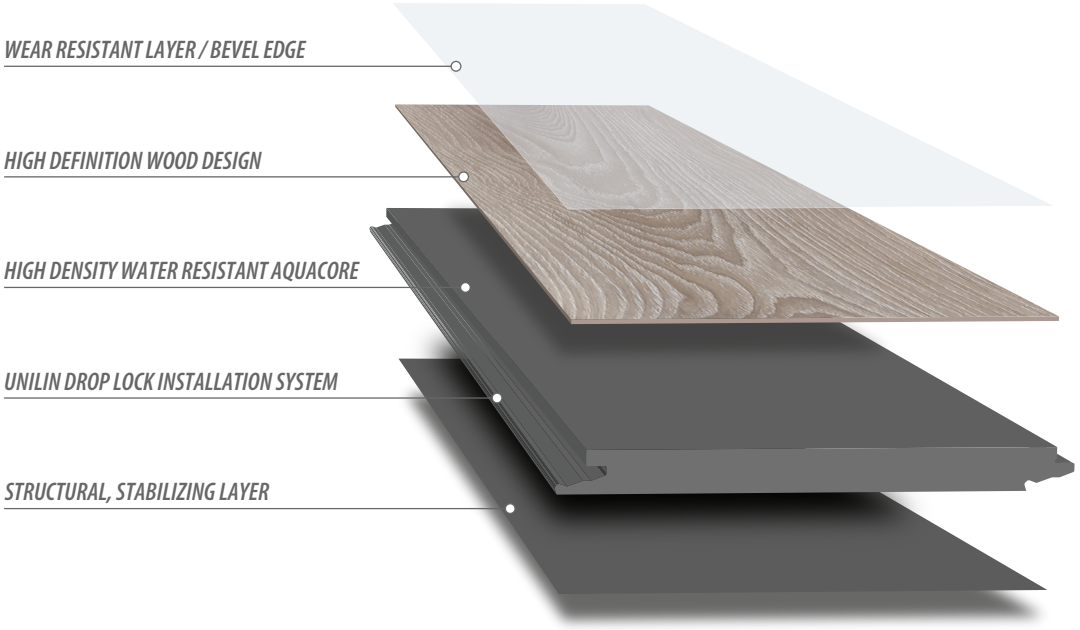

PLANK SIZE
165 mm x 1215 mm
(6.5" x 48")

TOTAL THICKNESS
12.3 mm

WHAT YOU NEED TO KNOW!

FEATURES	BENEFITS
PLANKS **165 mm X 1215 mm** **6.5" X 48" X 12.3 mm**	Paradigm features an Engineered High Density Water Resistant Core, that is ATCM 93120 CARB Phase 2, FloorScore® and Greenguard Gold certified, with a high definition decor and a durable wear resistant layer.
AQUACORE **WATER RESISTANT**	72 Hour Water Resistant ANSI/NALFA LF-01 Section 3.2 : ≥ 8% Swell Rate
RESISTANT LAYER **ABRASION RATING**	Durable wear resistant layer and bevelled edges. Ideal for residential and light commercial environments. Easy to maintain.
UNILIN **DROP LOCK** **INSTALLATION** **SYSTEM**	Incorporates the patented UNILIN Drop Lock system, allowing ease of installations. No hammer or tapping block to install the planks.
ENVIRONMENT	Paradigm is ATCM 93120 CARB Phase 2, FloorScore® and Greenguard Gold certified meeting all indoor air quality requirements.

INSTALLATION / ACOUSTICS: Paradigm must be installed with a 12 mm (1/2") gap around the perimeter of the room and at all vertical surfaces. A transition allowing a 12 mm (1/2") gap must be in place when installations are greater than 15 m (50') any direction. For acoustical performances Paradigm should be installed using Pro Solutions Premium Acoustic Membrane IXPE 2.0 with acoustic ratings of DELTA 25 and IIC 76.

PRODUCT SPECIFICATIONS	
Thickness	12.3 mm
Material	High Density Water Resistant Core
Abrasion Resistance	AC4, Class 23/31 | UV-cured aluminum oxide finish
Water Resistance	ANSI/NALFA LF-01 Section 3.2 : ≥ 8% Swell Rate 72 Hour Water Resistant
Recycling	100% Recyclable
Size	165 mm x 1215 mm (6.5" x 48") | Bevelled Edges
Sq.ft. / Carton	17.27
Pieces / Carton	8
Kg / Carton	17.24
EN13329 (Dimensional Stability)	Pass
EN13329 (Residual Indentation)	Pass
EN13329 (Thermal Conductivity)	Pass
EN13329 (Static Load Resistance)	Pass
EN438 (Chemical and Stain Resistance)	Pass
EN ISO105 (Light Stability)	Pass
Installation System	UNILIN Drop Lock
ATCM 93120 (Indoor Air Quality)	ATCM 93120 CARB Phase 2 / EPA TSCA Title VI Compliant FloorScore®, Greenguard Gold Certified
Limited Warranty	Residential : Limted Lifetime / Light Commercial : 5 years

DISTRIBUTION CENTRES : MONTRÉAL • VAUGHAN • CALGARY • COQUITLAM
BRANCHES : MONTRÉAL • QUÉBEC • SAGUENAY • BROSSARD • MONCTON • OTTAWA • DARTMOUTH • VAUGHAN• DOWNSVIEW • KINGSTON • STE. CATHERINES • CAMBRIDGE • SCARBOROUGH • KITCHENER • LONDON • MISSISSAUGA • WINDSOR • BARRIE • SUDBURY • HAMILTON • CALGARY • EDMONTON • WINNIPEG • RED DEER • SASKATOON • REGINA• SURREY • COQUITLAM • BURNABY • LANGLEY • VICTORIA • NANAIMO • RICHMOND • ABBOTSFORD • KAMLOOPS• KELOWNA • PRINCE GEORGE