STATION STREET





CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	710 g/m^2
NUMBER OF TUFTS	232260/m^2
TUFTING GAUGE	1/12”
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	**StableShield** - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.5 mm / 5.5 mm
TOTAL PILE HEIGHT	7.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn, Brick, Ashlar or Herringbone

SPECIFICATIONS

COLOURLINE


Station Street - 8847


Station Street - 8863


Station Street - 8873


Station Street - 8874


Station Street - 8875


Station Street - 8876


Station Street - 8878


Station Street - 8896













HOW TO INSTALL

QUARTER TURN

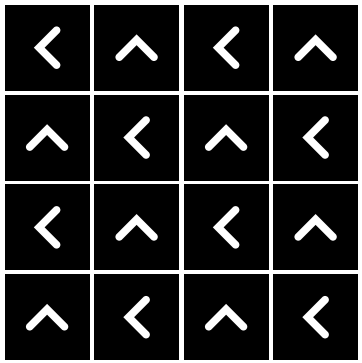

BRICK

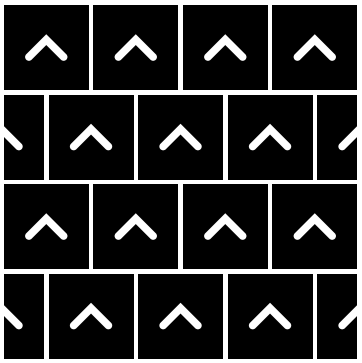

ASHLAR

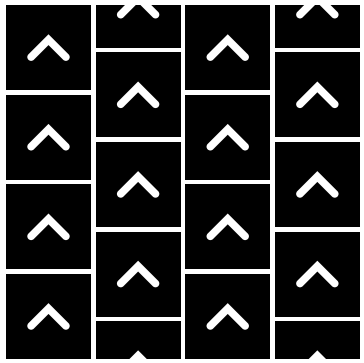

HERRINGBONE

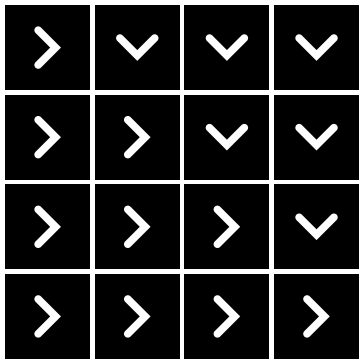



www.standardcarpets.com