AmericanBiltrite
Flooring

EASY TO INSTALL
REDUCES NOISE

TecCare FLOATING FLOOR SYSTEM



AmericanBiltrite
Flooring

TecCare FLOATING FLOOR SYSTEM



TRS-04 Light Brown

TecCare®

A unique floating floor like no other

TecCare's unique and innovative technology, combining a recycled underlayment and "peel and stick" planks and tiles, makes it **perfect for multi-unit developments, retail spaces, renovation projects, seniors' residences, educational and institutional applications.** The TecCare system provides speed and ease of installation, natural beauty, and durability.



FEATURES & BENEFITS


- **Resists scratching and abrasion**
- **Easy installation,** underlayment included
- 100% factory applied adhesive coverage on 6" x 36" vinyl planks and 18" x 18" tiles (no off-gassing)
- Effectively **reduces noise**
- Its 2,500 psi rating means **better resistance to indentation**
- Easy to replace if necessary

AmericanBiltrite
Flooring

TecCare FLOATING FLOOR SYSTEM


TecCare is a self-contained floating floor system in one carton.

Three-part Installation System: PLANK OR TILE, ADHESIVE and UNDERLAYMENT.

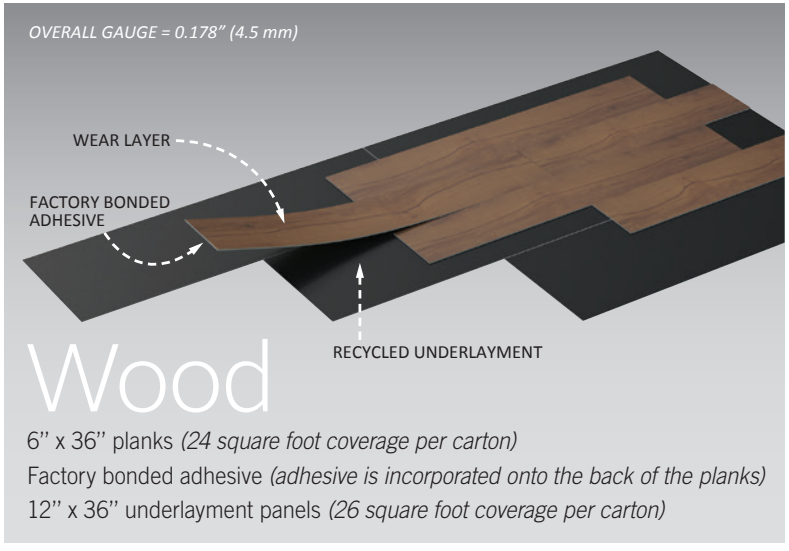

Wood

6" x 36" planks *(24 square foot coverage per carton)*
Factory bonded adhesive *(adhesive is incorporated onto the back of the planks)*
12" x 36" underlayment panels *(26 square foot coverage per carton)*

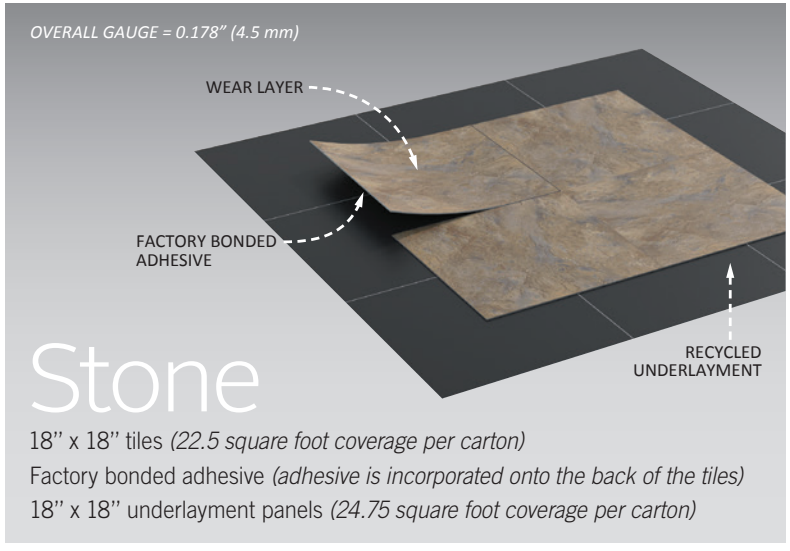

Stone

18" x 18" tiles *(22.5 square foot coverage per carton)*
Factory bonded adhesive *(adhesive is incorporated onto the back of the tiles)*
18" x 18" underlayment panels *(24.75 square foot coverage per carton)*

TecCare Installation

TecCare is a three-part system for use over existing flooring.

TecCare is flexible enough to cover up many minor imperfections in subfloors which means that it can be laid down directly on virtually any hard surface – wood, vinyl, and concrete among others – provided it is relatively smooth.

Simply loose lay the underlayment and adhere the peel and stick Luxury Vinyl planks or tiles to the underlayment. The fact that there is no bonding to the subfloor means that TecCare is easy to install, easy to replace and easy to remove.

Please refer to TecCare installation instructions on American Biltrite website for complete installation procedures (american-biltrite.com).

Tools Required Knife • Broom • Chalk • Carpenter Square • Measuring Tape

AmericanBiltrite
Flooring

TecCare Wood

WOOD COLLECTION

6" x 36" (152 mm x 915 mm)



LP6-01
Warm Beech



LP6-02
Canadian Cherry



LP6-04
Red Maple



LP6-05
Local Teak



LP6-06
Medium Walnut



LP6-07
Warm Teak



LP6-08
Dark Cedar

WOOD COLLECTION

6" x 36" (152 mm x 915 mm)



LP6-09
Spanish Cedar



LP6-11
Woodland



LP6-12
Hazelnut



LP6-13
Old Barn



LP6-14
Cashew



LP6-15
Light Mahogany



LP6-16
Driftwood

AmericanBiltrite
Flooring

TecCare Stone

RUSTIC SLATE

18'' x 18'' (457 mm x 457 mm)



TRS-01 Light Grey



TRS-03 Camel Beige



TRS-04 Light Brown

TIMELESS TRAVERTINE

18'' x 18'' (457 mm x 457 mm)



TTT-01 White



TTT-02 Cream



TTT-03 Beige

RUSTIC SLATE

18'' x 18'' (457 mm x 457 mm)



TRS-06 Dark Grey



TRS-07 Warm Grey

METRO STANDS

18'' x 18'' (457 mm x 457 mm)



TMS-01 Warm Taupe



TMS-02 Light Grey



TMS-03 Beige



TMS-06 Dark Brown

COSMO STONEWOOD

18'' x 18'' (457 mm x 457 mm)



TCS-01 Light Grey



TCS-02 Grey



TCS-04 Taupe



TCS-06 Bronze

AmericanBiltrite
Flooring

TecCare® | WOOD & STONE

TECHNICAL SPECIFICATIONS

Gauge		
Plank and Tile	**0.118”**	**3.00 mm**
Underlayment	**0.060”**	**1.5 mm**
Overall	**0.178”**	**4.5 mm**
Sizes		
Planks	**6” x 36”**	**152 mm x 915 mm**
Underlayment	**12” x 36”**	**305 mm x 915 mm**
Tiles	**18” x 18”**	**457 mm x 457 mm**
Underlayment	**18” x 18”**	**457 mm x 457 mm**
Wear layer Thickness	**0.012”**	**0.3 mm**

ASTM D 2047	Static Coefficient of Friction	Meets ADA guidelines
ASTM E 648	Critical Radiant Flux CRF (W/cm^2)	> 0.45
ASTM E 662	Smoke Density	≤ 450
ASTM E 989 / E 492	Sound Absorption	IIC 59
ASTM F 925	Chemical Resistance	Exceeds
ASTM F 970	Static Load (modified at 2,500 psi)	≤ 0.005”
ASTM F 1514	Heat Stability (ΔE ≤ 8.0)	PASS
ASTM F 1515	Light Stability (ΔE ≤ 8.0)	PASS
ASTM F 1700	Solid Vinyl Floor Tile	Class III, Type A or B
ASTM F 1914	Indentation	Residual ≤ 8%
ASTM F 2055	Squareness	0.010” maximum
Indoor Air Quality (IAQ):		FloorScore Certified by SCS Certification
Volatile Organic Compounds (VOC’s)		Registration Number SCS-FS-03325
Maintenance		Very low
PU (Polyurethane) surface treatment		Facilitates maintenance
Limited Wear Warranty		10 years

Please note that technical web site documents prevail.

INSTALLATION
Optimal results can only be achieved by following manufacturer’s instructions closely. Detailed installation instructions can be found at american-biltrite.com and should be carefully followed.

The TecCare Wood Collection mimics authentic wood looks. Color and design may vary from plank to plank and within each plank.

floor score
CERTIFIED BY SCS Global Services

ISO CERTIFIED 9001:2008 14001:2004

NAFCD
Trends • Education • Leadership • Networking

MEMBER

U.S. GREEN BUILDING COUNCIL MEMBER

American Biltrite 200 Bank Street, Sherbrooke, Quebec J1H 4K3 Canada | **american-biltrite.com**
To order samples: flooring@american-biltrite.com
1.800.437.8743 | Technical Services: 1.800.479.0190
® / TecCare is an American Biltrite trademark name
PRINTED IN CANADA BRO-E5-TEC ISSUED 11/2015