
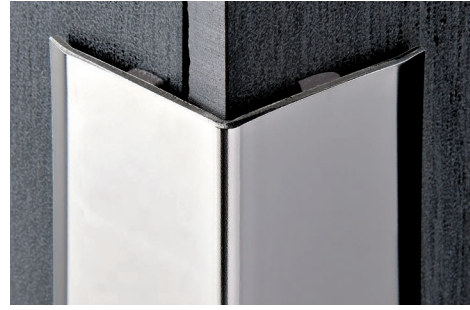


PROEDGE AC

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

PROEDGE AC is a corner bead profile in polished and satin finish stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

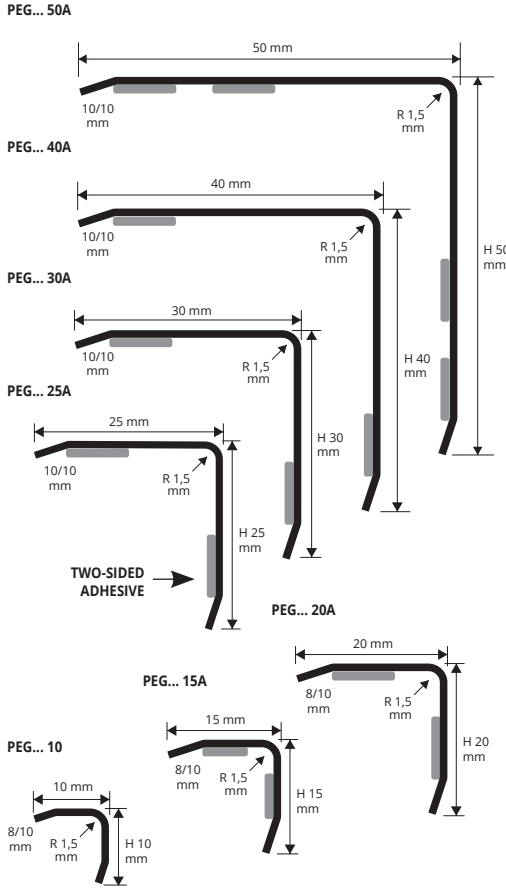

POLISHED AND SATIN FINISH STAINLESS STEEL
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm
PEGAC 10 (polish. s.s.)	10 x 10
PEGACS 10 (satin finish s.s.)	10 x 10

POLISHED AND SATIN FINISH STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm
PEGAC 15A (polish. s.s.)	15 x 15
PEGACS 15A (satin finish s.s.)	15 x 15
PEGAC 20A (polish. s.s.)	20 x 20
PEGACS 20A (satin finish s.s.)	20 x 20

For items without adhesive, write the item without the last A.
E.g.: PEGAC 15

COLOURS



Suitable for use in contact with foodstuffs.



POLISHED AND SATIN FINISH STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 40,5 lm - 10/10 mm

Article	LxH mm
PEGAC 25A (polish. s.s.)	25 x 25
PEGACS 25A (satin finish s.s.)	25 x 25
PEGAC 30A (polish. s.s.)	30 x 30
PEGACS 30A (satin finish s.s.)	30 x 30

For items without adhesive write the item without the last A.
E.g.: PEGAC 10

POLISHED AND SATIN FINISH STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm
PEGAC 40A (polish. s.s.)	40 x 40
PEGACS 40A (satin finish s.s.)	40 x 40
PEGAC 50A (polish. s.s.)	50 x 50
PEGACS 50A (satin finish s.s.)	50 x 50

For items without adhesive, write the item without the last A.
E.g.: PEGAC 40


PEG... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

PROEDGE OT

POLISHED AND CHROMED BRASS

PROEDGE OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE OT** a much sought-after profile that allows an elegant workmanlike application.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

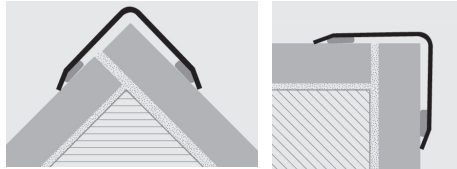

1. Choose "PROEDGE OT" according to the desired finish and width.
2. Cut "PROEDGE OT" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS



POLISHED AND CHROMED BRASS
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm
PEGOL 10 (polish.)	10 x 10
PEGOC 10 (chromed)	10 x 10

POLISHED AND CHROMED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm
PEGOL 15A (polish.)	15 x 15
PEGOC 15A (chromed)	15 x 15
PEGOL 20A (polish.)	20 x 20
PEGOC 20A (chromed)	20 x 20
PEGOC 25A (chromed)	25 x 25
PEGOC 30A (chromed)	30 x 30

For items without adhesive, write the item without the last A.
E.g.: PEGOL 15



POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm
PEGOL 25A	25 x 25
PEGOL 30A	30 x 30

POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 12/10 mm

Article	LxH mm
PEGOL 40A	40 x 40
PEGOL 50A	50 x 50

PEG... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGOL 40

* - Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed