



SOL 40P range comprises a large assortment of universal jointing profiles in aluminium covered with film that is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Thanks to the insert in rigid PVC (non-conducting) between the base and the top, the new **SOL 40P** stops and eliminates electrostatic charges and magnetic fields and whatever else may be transmitted between two floors (e.g.: heated floors). available in wooden finishes, plus anodized finishes. Any insert of height H 7, 9, 11, 13, 15, 17 and 19 mm may be used with either the punched/perforated base for screwing or for gluing. Covering width 40 mm.

SOL 40P

TOP IN WOODEN OR ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE



ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 17, 19 - 40,5 lm)

Article	H mm		
PISPC... 407 (PIN insert 07)	7 / 10		
PISPC... 409 (PIN insert 09)	9 / 12		
PISPC... 4011 (PIN insert 11)	11 / 14		
PISPC... 4013 (PIN insert 13)	13 / 16		
PISPC... 4015 (PIN insert 15)	15 / 18		
PISPC... 4017 (PIN insert 17)	17 / 20		
PISPC... 4019 (PIN insert 19)	19 / 22		

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
length 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)



Article	H mm		
PISPC... 4079S (PIN insert 07)	7 / 10		
PISPC... 4099S (PIN insert 09)	9 / 12		
PISPC... 40119S (PIN insert 11)	11 / 14		
PISPC... 40139S (PIN insert 13)	13 / 16		
PISPC... 40159S (PIN insert 15)	15 / 18		
PISPC... 40179S (PIN insert 17)	17 / 20		
PISPC... 40199S (PIN insert 19)	19 / 22		

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PISPC... 4079S (chosen finish anod. gold) PISPCAO 4079S.

ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND





WOODEN COLOURS



* WOODEN COLOURS ON DEMAND



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

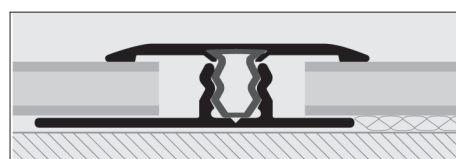

1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed