

WATER RESISTANT LAMINATE FLOORING

Welcome to the new era of laminate flooring. Where heritage and tradition meet the precision and durability of contemporary design. We're excited to offer Landmark, a waterproof 8mm laminate with an attached 2mm premium pad, and Megaloc Aqua Protect technology.



SCARBOROUGH

BENEFITS

- CARB Phase 2 and EPA TSCA Title VI compliant
- Landmark has the highest durability rating - AC5, which makes it suitable for commercial use.
- GreenGuard Gold and Blue Angel certified means this floor is safe for family and pets.
- 72 hour water resistance to protect it from spills.
- Easy to Install

Inhaus®

Distributed By



www.tasupply.com



COOPER

Distributed by T&A Supply Company
For more info on this and other quality
flooring products visit www.tasupply.com

LANDMARK LAMDURA COLLECTION

A Unique Water Resistant Laminate




WOODSIDE

Inhaus®




LAMDURA

LANDMARK COLLECTION

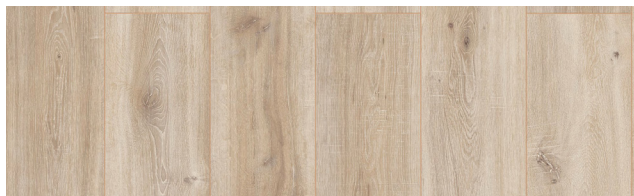

IH56132 | Lorenzo

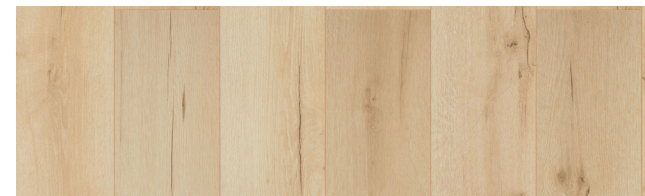

IH56133 | Tamarind




IH56134 | Snowdrop




IH56135 | Scarborough




IH56137 | Cooper

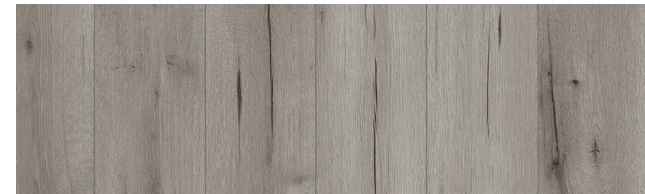

IH56138 | Cassini

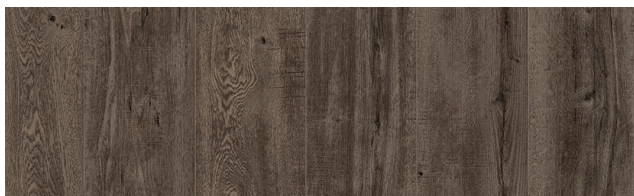

IH56139 | Lakeside

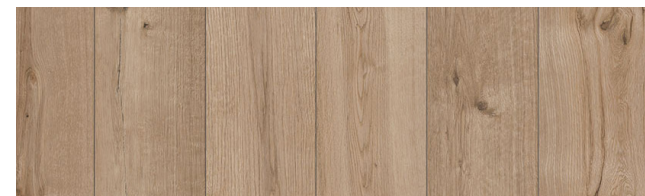

Inspirations - IH56145 | Woodside

SPECIFICATIONS

Dimensions: 7.5" width, 50.5" length, 8mm thickness

Attached Pad: 2mm premium pad

Edge Profile: 4-side bevel

Unique Visuals: 1-10 Boards

Wear Surface Rating: AC5

Surface Texture: Embossed in Register

Water Resistant: 72 Hours

Installation: MegaLoc Aqua Protect, Angle/Drop

Warranty: Lifetime Residential, 7 Year Light Commercial

Packaging: 18.59 sf/ctn, 52 ctn/plt, 966.68sf/plt

Inspirations (Only 1 sku, color Woodside)

Wear Surface Rating: AC4

Warranty: 40 year residential, 7 year light commercial, 72 Hr topical moisture

TRIMS AVAILABLE

94" Long Coordinating Moldings Available in 5 Profiles:

Quarter Round, End Cap, T-Molding, Reducer, Stairnose



www.blauer-engel.de/en/uz176

Installation Fast Facts:

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimate product to normal room temperature
- Recommended Room Temp: 60°F -85°F after install
- Expansion Space: 1/4" gap
- No transitions required in rooms under 2,500 sf

Read Complete Instructions Before Installing