


**7MM + 2MM PAD**

**WATER RESISTANT LAMINATE**

A perfect choice for anyone looking to add warmth, comfort and elegance to their home.

**Beautiful show stopping visuals.**

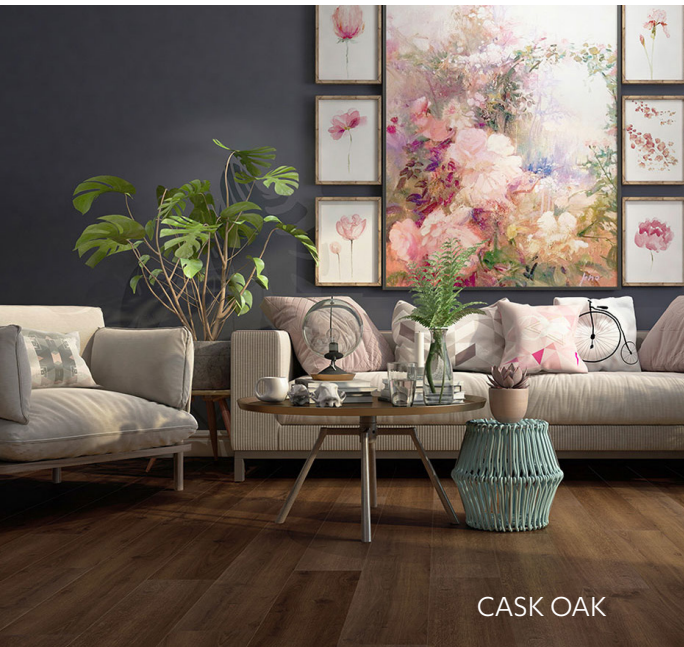

CASK OAK

**BENEFITS**

- Pet friendly, safe to wet & steam mop. Every day spill protection.
- GREENGUARD Gold, Blue Angel, and ECO Institute certified.
- CARB 2 and EPA TSCA Title VI compliant, ensuring low formaldehyde emissions.
- Easily install with Megaloc, patented angle-drop installation system.
- Coordinating moldings in 5 profiles available.

**Inhaus®**

Distributed By



[www.tasupply.com](http://www.tasupply.com)



ADELAIDE

Distributed by T&A Supply Company  
For more info on this and other quality  
flooring products visit [www.tasupply.com](http://www.tasupply.com)

**VISIONS PLUS**

**LAMDURA COLLECTION**

WATER RESISTANT LAMINATE



BUNBURY

**Inhaus®**

## SPECIFICATIONS

**Dimensions:** (nominal) 7.5" width, 50.5" length, 7mm thickness

**Pad Attached:** 2mm

**Edge Profile:** 4-side bevel

**Unique Visuals:** 1-10 Boards

**Wear Surface Rating:** AC3

**Surface Texture:** Wood Grain

**Water Resistant:** 24 Hours

**Installation:** MegaLoc HausProtect, Angle/Drop

**Warranty:** 20 Yr Residential, 24 Hr Topical Moisture

**Packaging:** 21.48 sf/ctn, 52 ctn/plt, 1117.1 sf/plt



[www.blauer-engel.de/en/uz176](http://www.blauer-engel.de/en/uz176)




# VISIONS PLUS LAMDURA COLLECTION



IH56347 | Adelaide



IH56350 | Bunbury

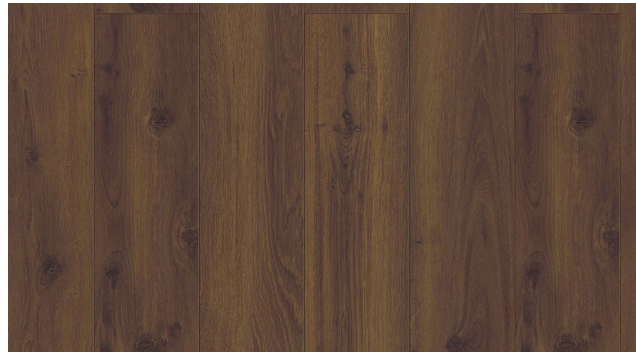

IH56352 | Cask Oak



IH56357 | Nelson



IH56359 | White Oak

### Installation Fast Facts:

- **Always Read and follow complete installation instructions.**
- Flooring must be allowed to freely float, with proper expansion space.
- Do not install cabinets or other heavy objects over flooring.
- Expansion Space at Vertical Surfaces: Minimum 1/4"
- Maximum Width/Length without T-Mold: 80 linear feet
- Maximum space without T-Mold: 6,400 square feet
- Climate Control: 30-50% Relative Humidity (RH)
- Temperature control prior-during-after Installation: 65-80° F
- Acclimate Flooring: Achieve Normal Room Conditions
- Use floor protection under furniture legs
- Use chair pads under rolling castors
- Radiant Heat : approved (Hydro Systems Only)
- Floor Flatness: Maximum 3/16" in 10 linear feet
- Temperature range after installation: 0-