

SYDNEY

Stone Plastic Composite Herringbone

SPECIFICATIONS

Thickness: 6mm (0.5mm wear layer + 1.5mm cork)
Dimension: 5.91" width x 29.53" length
Finish: Embossed in Register (EIR)
Bevelled: Painted-bevelled
Variation: 12
STC/IIC: 74/73
Warranty: 30 years residential/ 10 years commercial

Square ft./ Carton: 19.38 sq ft/box
Carton/ Pallet: 54 boxes
Square ft./ Pallet: 1046.52 sq ft/ pallet
Weight/ Carton: 40 lbs

FEATURES

Pet-friendly


- 100% waterproof
- Advanced sound reduction
- Scratch-resistant & stain-free virgin materials

Family Safety & Health


- Industry quality standards & strict quality control
- Anti-slipped finishing technology

Easy Installation


- A, B plank
- Patented lock system - Unilin Angle/ Angle
- High resistance in direct sunlight
- Able to withstand temperatures from +60°C to -20°C
- Able to apply on water radiant or electric floor heating

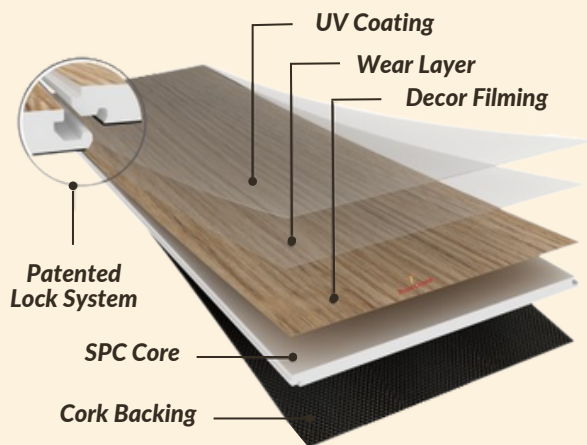


ACCESSORIES



Reducer



Stair Nose



T-Moulding



HOME'S PRO
BUILDING MATERIALS

www.homespros.ca

Vancouver

Edmonton

Calgary

Saskatoon

Winnipeg

Toronto

Halifax

SYDNEY

Couvre-plancher Composites En Plastique De Pierre En Design Des Chevrons

SPÉCIFICATIONS

Epaisseur: 6mm (0.5mm couche d'usure + 1.5mm liège)

Dimension: 5.91" largeur x 29.53" longueur

Finition: Embossé (EIR)

Biseauté: Peint-biseauté

Variation: 12

STC/IIC: 74/73

Garantie: 30 années résidentielle/ 10 années commerciale

Pieds carrés/ Carton: 19.38 pi2/boîte

Carton/ Palette: 54 boîte

Pieds carrés/ Palette: 1046.52 pi2/ palette

Poids/ Carton: 40 lbs

CARACTÉRISTIQUES

Accepte Les Animaux


- 100% résistant à l'eau
- Réduction sonore avancée
- Matériaux vierges résistants aux rayures et taches

Sécurité Et Santé De La Famille


- Normes de qualité de l'industrie et contrôle de qualité rigoureux
- Technologie de finition antidérapante

Installation Facile


- A,B planche
- Système de verrouillage patenté- Unilin Angle/ Angle
- Haute résistance à la lumière directe du soleil
- Tolère des conditions de +60°C à -20°C
- Peut s'appliquer sur un plancher chauffant à eau ou électrique

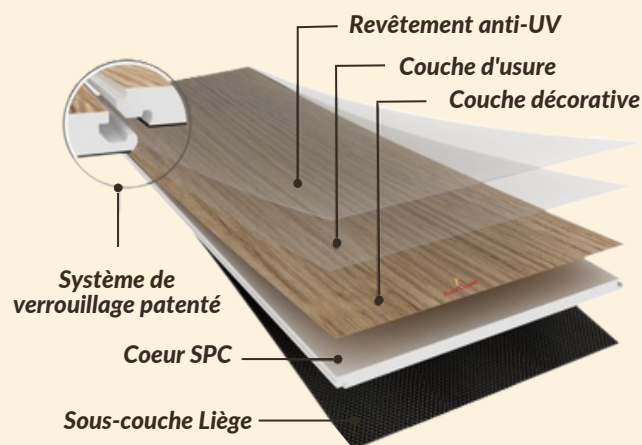


ACCESSOIRES



Réducteur



Nez de marches



Moulure en T



HOME'S PRO
BUILDING MATERIALS

www.homespros.ca

Vancouver

Edmonton

Calgary

Saskatoon

Winnipeg

Toronto

Halifax