

ARDEX B 20™

Overhead & Vertical Repair Mortar with Corrosion Inhibitor

A trowel-grade, Portland cement-based, polymer modified, structural repair mortar with a built-in corrosion inhibitor to protect reinforcing steel. Suitable for commercial, institutional and multi-unit residential applications.

Key Features

- Glass microspheres add body, reduce weight
- Mixes with water only
- Non-sag and can be sculpted
- Exterior or interior
- Vertical or overhead


Installation

- **Packaging:** 55 lb. bag (25 kg)
- **Coverage:** 20 sq. ft. at 1/4" (1.86 m² at 6 mm)
- **Installs:**
 - 1/4" to 2" (6 mm to 5 cm) in one lift
 - Up to 8" (20 cm) in multiple lifts
- **Pot life:** 15 to 30 minutes
- **Coat or seal:** 3 to 7 days

Performance

- **ASTM C109 (air mod only) Compressive Strength:**
 - 1 day 3,000 psi (211 kg/cm²)
 - 7 days 5,000 psi (352 kg/cm²)
 - 28 days 6,300 psi (443 kg/cm²)
- **ASTM C293 Flexural Strength:**
 - 7 days 1,100 psi (77 kg/cm²)
 - 28 days 500 psi (35 kg/cm²)

VOC: 0

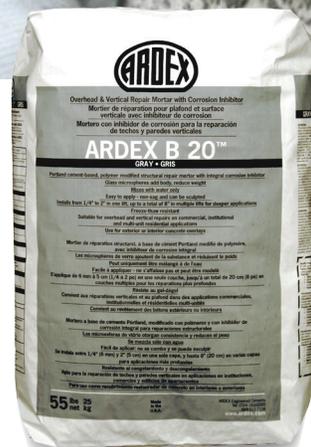

ENGINEERED CONCRETE
REPAIR SYSTEMS



AMERICAS

+1-724-203-5000
888-512-7339

www.ardexamericas.com

AF 400 11/14