
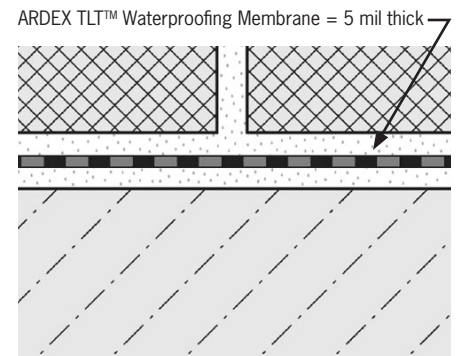


ARDEX TLT™

Waterproofing Accessories

Ceramic and stone tiles are durable, easy to maintain and hygienic, representing ideal surface coverings in wet areas. However, since tiles and grout are not inherently waterproof, it is essential to protect the substrate from moisture penetration with the ARDEX TLT™ Waterproofing Accessories.

These ARDEX TLT™ Waterproofing Accessories feature a modified polyethylene (PEVA) core with a non-woven polypropylene on both sides. The material is physiologically safe and does not require special disposal. This waterproof membrane is 5-mil thick and has a water vapor permeance of 0.051 perms, when tested according to ASTM E96, using Procedure E at 90% relative humidity.

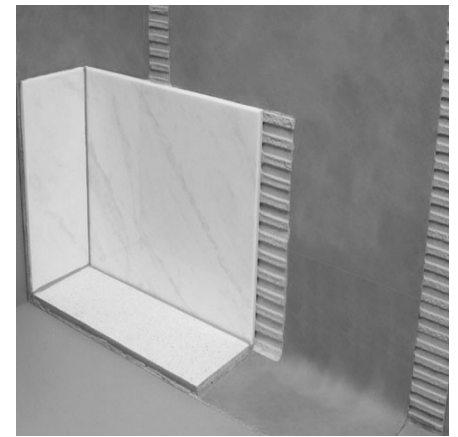

- ① ARDEX TLT™ Seam Tape
- ② ARDEX TLT™ Waterproofing Membrane
- ③ ARDEX TLT™ Outside Corner
- ④ ARDEX TLT™ Inside Corner
- ⑤ ARDEX TLT™ Mixing/Pipe Valve Seal



tile & stone
Installation Systems


www.ardexamericas.com

BUILT BY
YOU
backed by **ARDEX**

ARDEX TLT™

Waterproofing Accessories


ARDEX TLT™ Waterproofing Membrane is a lightweight, polyethylene membrane for use under tile and stone surfaces in showers and wet area applications. It is also suitable for chemical-resistant flooring. **ARDEX TLT™ Seam Tape** is made from the same lightweight, waterproof material as the waterproofing membrane and is for use over horizontal and vertical seams. **ARDEX TLT™ Mixing/Pipe Valve Seals** are designed to seal pipe protrusions and are for use around supply lines to shower heads, hand held wands, jets, and spray and steam heads. They act as an anti-fracture membrane between substrates and hard surface coverings. **ARDEX TLT™ Inside/Outside Corners** are constructed as a single piece from a seamless material that eliminates the potential of weak points in time-consuming jobsite-cutting techniques. They offer convenience and provide peace of mind knowing every corner is safe from water infiltration.

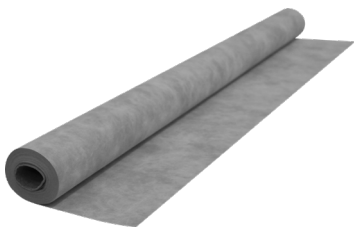


ARDEX TLT™ WATERPROOFING MEMBRANE			
Width	Length	Area	Thickness
3 ft. 3 in (1 m)	32 ft. (10 m)	108 ft. ² (10 m ²)	5 mil
3 ft. 3 in (1 m)	98 ft. 5 in (30 m)	323 ft. ² (30 m ²)	5 mil



ARDEX TLT™ SEAM TAPE		
Width	Length	Thickness
4.7 in (12 cm)	33 ft (10 m)	5 mil
4.7 in (12 cm)	66 ft (20 m)	5 mil
4.7 in (12 cm)	98 ft (30 m)	5 mil

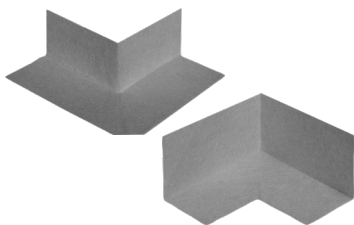

ARDEX TLT™ CORNERS		
Description	Thickness	Degree
Outside Corner	5 mil	90°/135°
Inside Corner	5 mil	90°/135°

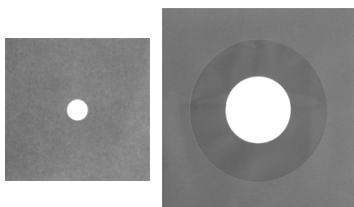

ARDEX TLT™ MIXING/PIPE VALVE SEALS	
Description	Thickness
Pipe Collar	5 mil
Mixing Valve Collar	5 mil



tile & stone
Installation Systems

www.ardexamericas.com

BUILT BY
YOU
backed by **ARDEX**