



Transfer tape, scrim reinforced

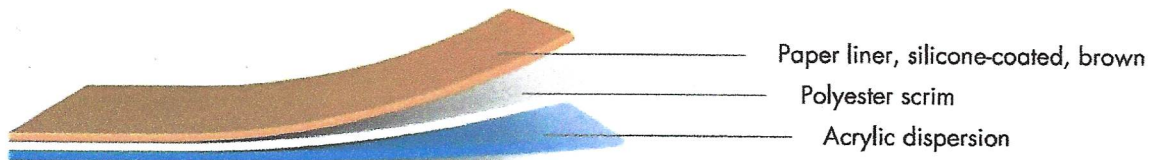

Material data

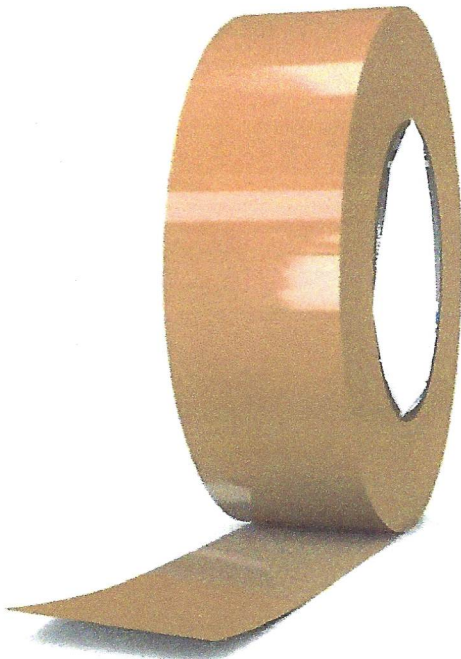

Adhesive carrier:	polyester scrim
Adhesive system:	acrylic dispersion
Liner:	paper, brown
Thickness (without liner):	0.22 – 0.24 mm
Recommended processing temperature:	+50 °F to +86 °F
Temperature resistance:	-22 °F to +248 °F
Condensation water resistance:	high
Aging resistance:	high
Plasticizer resistance:	limited
Tack:	high

Product features

- solvent-free acrylic dispersion
- balanced initial tack

Application area

- bonding of smooth and slightly textured surfaces
- laminating and bonding of metal, wood or foams
- laminating and bonding of plastics or paper
- for surfaces with higher roughness depth