

PROSKIRTING LED is an innovative patented baseboard called "cable duct" in anodized aluminium, with illumination led system incorporated. Conceived and designed to illuminate the passage zone such as corridors and house and office entrances as well. It generates soft and indirect light. Moreover, it solves many other problems such as the laying of the baseboard itself, the passage of the electric cables, the ones for PC, telephone and other plants as well. **PROSKIRTING LED** has been designed with double function and utility: 1- **PROSKIRTING LED** complete PKLEDAA 80 is an inspectional joint baseboard composed of PKGS 66 support for fixing it with screws on the wall and the **PROSKIRTING LED** PKLEDAA 80 at sight profile. 2- **PROSKIRTING LED** PKLEDAA 80 is a at sight baseboard profile to be fixed directly with silicone/ adhesive. It is not an inspectional one like **PROSKIRTING LED** complete, and is available also in auto adhesive version (PKLEDAA 80A).

PROSKIRTING LED

ANODIZED SILVER ALUMINIUM WITH LED AND POWER SUPPLY BOX



SKIRTING BOARD IN ANOD. SILVER ALU. WITHOUT ADHESIVE.
ADAPTOR LED, LED & FLAT NOT INCLUDED (indicate the article)
thermo packed - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	H mm
PKLEDAA 80	80

SKIRTING BOARD IN ANOD. SILVER ALUM. WITH ADHESIVE,
ADAPTOR LED, LED & FLAT NOT INCLUDED (indicate the article)
thermo packed - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	H mm
PKLEDAA 80A	80


Please, specify in your order the code of the FLAT you choose : matt or gloss. Eg.: PKLEDAA 80 + PKGPIAL

POLYCARBONATE FLAT - bar length 2 lm

Article	
PKGPIAL	Gloss
PKGPIAO	Matt

ADHESIVE FLEXIBLE LED COIL
length 5 lm - pack.1 ROLL

Article	
LEDN (neutral light 12V)	
LEDF (cold light 12V)	
LEDC (hot light 12V)	



POWER SUPPLY BOX
SOCKET with FASTENING BASIS

Article	
SPA 1820	

LED POWER SUPPLY 75W - 12V

Article	
ALL 7512	




CABLE RACEWAY/ SUPPORT- COEXTRUDED PVC
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm
CSPPK 80	70

PUNCHED SUPPORT - NATURAL ALUMINIUM
support length 2 cm - pack. 10 Pcs

Article	H mm
PKGS 66/10	66




ARTICLES NOT FOR SALE SINGLY

COLOURS




On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.



SWITCH BOX
with BOX BASIS

Article	
SI 1410	



JUNCTION BOX
with FASTENING BASIS


Article	
SD 1210	




VERTICAL CABLE DUCT PROFILE
bar length 2,7 lm

Article	
PSPV	

It matches with CSPPK 80.

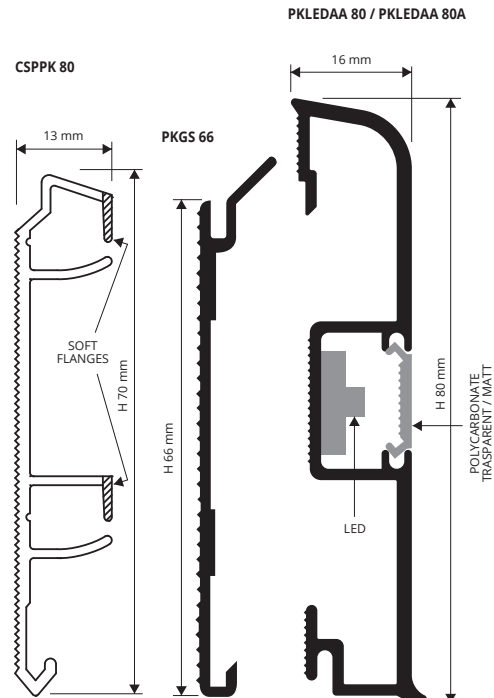

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

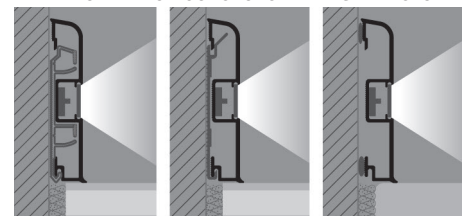

1. Fix the support on the wall putting the screws and plugs every 50 cm (recommended). Make a test with "PROSKIRTING LED" in order to value the height and the correct position of supports.
2. Fix in the chosen spaces the socket/ power supply box basis, switch box basis and, eventually, the junction box.
3. Connect 220V supply to power/ transformer unit, and afterwards, connect the "PROSKIRTING LED" bar next to power unit.
4. Connect the pre-applied led bars inside the "PROSKIRTING LED" with the supplied cables/ wires in continuous way.
5. The power supply unit guarantees about 15 lm of led illumination, beyond that distance it is necessary to add another power supply box/socket.

When fixing without support, clean the surface carefully so that it's dry and with no grass trace, apply the silicone on the knurled sides of the profile and lay down correctly, pressing uniformly and with no hammering. For the application of "PROSKIRTING LED" with adhesive, we recommend the temperature not below 15°.

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC SILVER FINISH



PKAGI 80
internal corner



PKAGE 80
external corner



PKGIN 80
joint



PKTDSAA 80/5
end caps

IN/EXTERNAL CORNER - VARNISHED PLASTIC (SILVER FIN.)
pack. 5 Pcs

Article	H x L mm
PKAGI 80/5 (internal)	80 X 40
PKAGE 80/5 (external)	80 X 40

JOINTS - VARNISHED PLASTIC (SILVER FIN.) - pack. 10 Pcs

Article	H mm
PKGIN 80/10	80

END CAPS R / L - VARNISHED PLASTIC (SILVER FIN.)

pack. 10 Pcs (5 right and 5 left)

Article	H mm
PKTDSAA 80/5	80



* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed