



# PROSTYLE



## DESCRIPTION

**PROSTYLE** is a profile in stainless steel for stairs designed to decorate the joint between the tread and the step rise. Its particular rounded geometry makes it an elegant and valued profile also in case of modern stairs.

## MATERIAL

**PROSTYLE** is a decorative profile in polished stainless steel AISI 304/1.4301 – V2A for stairs. It is equipped with a punched flange that guarantees a perfect adhesion with the adhesive. The profile, with a rounded shape, has a visible surface of 18 - 20 and 22.5 mm and is available in the heights of 8 - 10 and 12.5 mm. The rounded section ends in contact with the stair tread, while the vertical one rests on the step rise. Its particular geometry and the availability of special pieces as external corner and end caps, make **PROSTYLE** a much-sought after and easy to lay profile.

## AREAS OF USE

**PROSTYLE** in stainless steel AISI 304/1.4301 – V2A is suitable for every kind of environment where high resistance to mechanical and chemical stresses are required.



## WARNINGS



Do not use **PROSTYLE** in stainless steel AISI 304/1.4301 – V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommend to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

## MAINTENANCE

**PROSTYLE** does not require any special maintenance; it is recommended to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Choose "**PROSTYLE**" according to the thickness of the flooring.
2. Lay the tiles on the step rise and apply the adhesive on the area of the step tread, where the profile will be laid.
3. Lay the profile on the step tread, resting it on the tiles of the rise covering.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

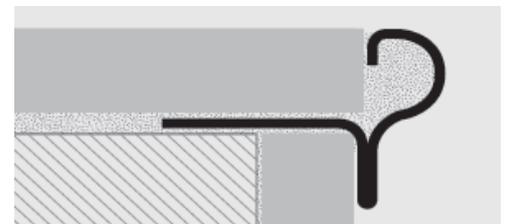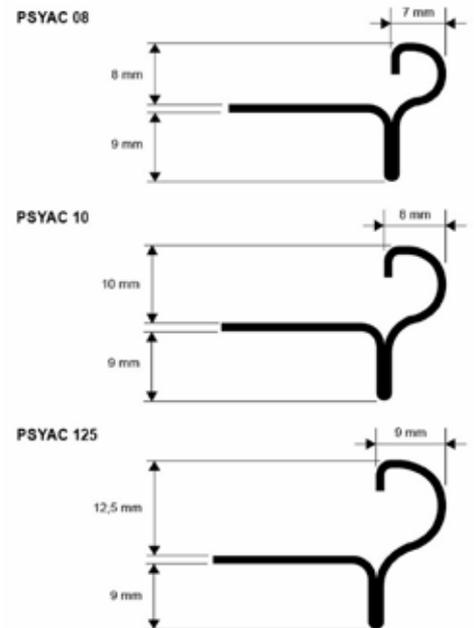

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of decorative profile in polished stainless steel AISI 304/1.4301 – V2A. It is equipped with a punched flange that guarantees a perfect adhesion with the adhesive. The profile with a height of 8 / 10 / 12.5, has a visible surface of 18 / 20 / 22.5 mm. The rounded section ends in contact with the stair tread while the vertical one rests on the step rise. The profile is equipped with special pieces as external corner and end caps, like **PROSTYLE** of the Progress Profiles company.

**PSYAC 08/10/125** : Polished stainless steel AISI 304 / 1.4301 - V2A

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt