

ACCESSORIES

## MITIGATE ADVERSE FLOORING CONDITIONS:

- Simply unroll to install!
- Reduce labor install time and costs
- Bridges narrow subfloor gaps and defects
- Outstanding acoustical sound reduction performance
- Moisture **impermeability** barrier

SureStart™  
Underlayment



THE ULTIMATE  
FLOORING EXPERIENCE



## SURESTART™ UNDERLAYMENT

TECHNICAL DATA		SURESTART
Acoustical Sound Reduction	ASTM E492 & E989*	IIC 66
	ASTM E2179	$\Delta$ IIC 17
	ASTM E90 & 413*	STC 63
Moisture Impermeability	ASTM E96	< 1.0 perm.
	ASTM F2170	99% RH
	ASTM F1869	10lbs per 1,000 ft <sup>2</sup> /24hrs
		7-11pH

Please visit [tarkettna.com](http://tarkettna.com) for the most updated specifications, and installation, cleaning and maintenance instructions.



\*Acoustical testing performed with 4 mm LVT & SureStart underlayment in a common floor/ceiling assembly

Introducing the newest innovation in resilient flooring underlayment, Tarkett SureStart™. Industry thought leader, Tarkett, has set a new high-level standard with a product that combines fast installation and substantial acoustic sound reduction with moisture impermeability performance. SureStart universally enhances the finished floor performance while reducing installation time and labor and decreasing the period of time when a space is out of use. Customers, facility managers, property owners, & space occupants won't have to compromise when choosing a universal underlayment solution to address adverse flooring concerns.

SureStart's industry leading product specifications provide acoustical comfort with a product  $\Delta$ IIC sound transmission reduction rating of 17 and a total overall floor to floor IIC of 66. Spacial sound reverberation is also significantly reduced with a STC rating of 63.

SureStart provides a unique moisture impermeability barrier, dramatically slowing the rate of moisture & water vapor from passing through the underlayment to the finished flooring. SureStart is also an excellent solution for typical wood subfloors similar to what you'd find in single or multi-family residential construction. SureStart bridges minor cracks and surface imperfections accelerating install timelines and reducing labor costs associated with subfloor repair. Beyond performance, installation is easier than ever with SureStart. Just roll it onto your surface and you're ready to go! Use a quality flashing tape to secure all seams, cuts and breaks.

In effort to create healthier spaces, SureStart is CRI certified for low emitting VOCs, contributing to improved indoor air quality. It is also recyclable as part of the Tarkett ReStart® reclamation program. In commercial or multi-family spaces where time and budgets matter, one thing is for sure – SureStart underlayment is the ideal solution for LVT installations.

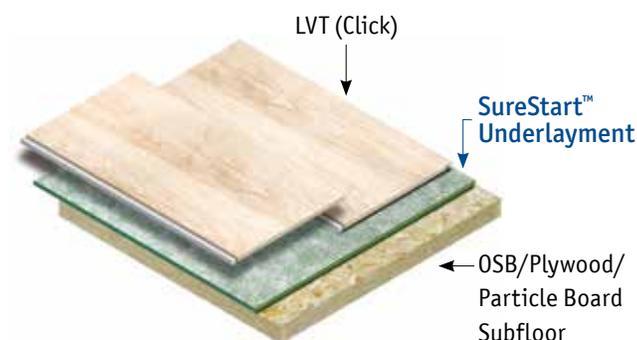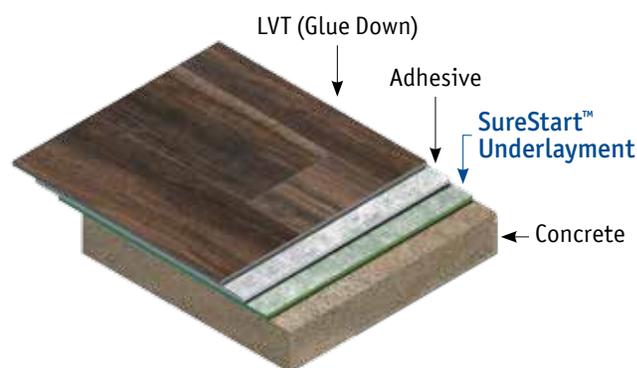

### Ordering Information

Item	SureStart Underlayment roll	
Product Number	500033006	500033007
UPC	033799334421	033799334438
Width	36"	54"
Length	33.3' (10.14 m)	44.4' (13.533 m)
Coverage Per Roll	100 sq. ft.	200 sq. ft.
	11.11 sq. yd. (9.2903 m <sup>2</sup> )	22.22 sq. yd. (18.58 m <sup>2</sup> )
Weight per roll	29 lbs. (13.15 kg)	58 lbs. (26.30 kg)

