




PROVA PIPE SEAL®

PROVA PIPE SEAL® is a thin square polypropylene waterproofing collar designed to waterproof substrates around pipe protrusions and under tile and stone installations. PROVA PIPE SEAL® is made of a waterproof fabric—PROVA-MAT®—that contains a highly elastic rubber modified polyolefin center through which pipes are firmly sealed. PROVA PIPE SEAL® is an accessory to PROVA-MAT® and to be used to create fully waterproof shower system installations.

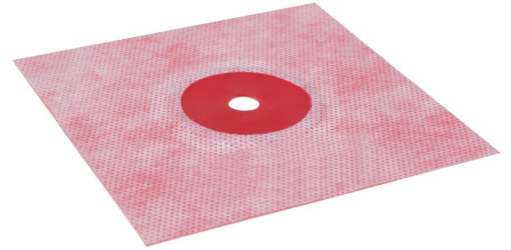

Dimensions and Part Numbers

- 4.72" x 4.72" (12 cm x 12 cm) (1 pc: TT8102REDPS) • **Opening Size:** 1/2" (12.5 mm)
- 4.72" x 4.72" (12 cm x 12 cm) (10 pc: TT8102REDPSB) • **Fabric Thickness:** ~0.016" (0.41 mm)
- **Flexible Inlet Thickness:** ~0.03" (0.76 mm)

Technical Characteristics

| Property Type | Property Results |
|----------------------|---|
| Waterproofness | Fungus and mildew resistant; high steam diffusion density |
| Unit Weight | ~0.011 lb. (4.8 g) |
| Material | Polypropylene membrane with a rubber modified polyolefin center |
| Chemical Resistances | Alkali resistant |
| Storage Temperature | Room temperature |

Installation Summary

Prior to installation, ensure that the substrate is **clean, dry, flat, and structurally sound**. PROVA PIPE SEAL® should be installed at the same time as PROVA CORNER® and PROVA JOINT®, as per the installation instructions for PROVA-MAT®. Suitable substrates for PROVA PIPE SEAL® include plywood (EGP), drywall, backer board, and cement slab.

Step 1: Apply Thinset to Installation Area

Apply modified thinset to a 5"-6" area along the circumference of the pipe using a 1/4" x 3/16" V-notch trowel.

Step 2: Adhere PROVA PIPE SEAL® to Substrate

Slide the opening of the PROVA PIPE SEAL® over the pipe and press the fabric into the thinset. Use the flat side of the trowel while moving in a diagonal direction to eliminate all air pockets and remove excess thinset.

Step 3: Overlap With PROVA-MAT®

Overlap the PROVA PIPE SEAL® with a minimum of 2" PROVA-MAT® membrane when waterproofing adjacent substrates. Trowel modified thinset over the pipe seal to adhere PROVA-MAT® sections to the PROVA PIPE SEAL®.