

Notting Hill 629 Nine-Layer Engineered Wood



Species

European Oak, Hickory

Large Planks

Random lengths up to 75", premium sort:

Over 50% of floor area is 75" boards

Thickness: $\frac{3}{4}$ " (nominal) 18 mm

Width: $7\frac{1}{2}$ " (nominal) 19 cm

Structure

Nine-layer Engineered Wood

3 mm Sawn Wood Face Layer

Wire Brush Finish

Four-Sided Beveled Edge

Low Luster Gloss Level

UV-Cured Polyurethane with Aluminum Oxide

Installation

T&G joint; stapled, glued, or floated

Oak colors compatible with hydronic heating

Packaging

23.31 SF per carton

6 layers per carton (57 lbs)

40 cartons per pallet

Certification

Floor Score Certified

Warranties

35-Year Residential Wear

Lifetime Structural

See full warranty text at nextfloor.net

Coordinating Moldings

Stair Nose, Reducer, and T-mold available

See more details at nextfloor.net

Sample SKUs

Strap Sets

SS629NF

5 per carton (54 lbs)

Display

7CARDS629NF-1


7CARDS629NF-2

7CARDS629NF-3

FIXT629NF

Packaged in 3 cartons

$\frac{3}{4}$ " is ideal beside:
tile over $\frac{1}{4}$ " underlayment

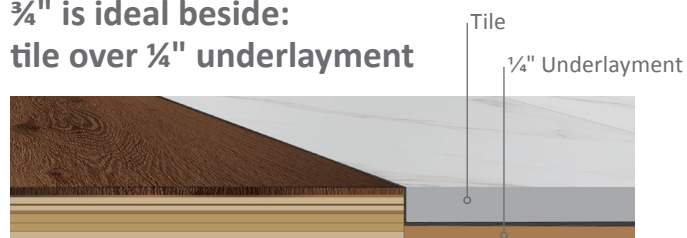

Beautiful Sawn Hardwood

- Millbrook Timbers engineered wood floors are made with classic finishing techniques.
Beautiful natural wood textures are enhanced with light wire brushing, refined edge bevels, and multiple rich stains.
- Thick 3 mm European oak or hickory face.
- Durable aluminum oxide finish **resists scratches** and stays beautiful for a lifetime.

Large Luxurious Planks

Wide Planks
7½" width


Six Foot Planks
Long random lengths up to 75"

Premium Sort
Over 50% of floor area is 75" boards



¾" Thick, Simply the Best

- Notting Hill features an extra-thick ¾" nine-layer construction:
 - Guaranteed for a lifetime of heavy residential use.
 - Built to last for many generations.
 - More durable and stable than thinner hardwood floors, even in changing temperature and humidity.
- The top hardwood layer is very thick (3 mm):
 - Thick enough to be refinished multiple times (e.g. to change the stain color when redecorating).
- The ¾" thickness creates beautiful, level transitions where hardwood meets tile flooring (when tile is installed over ¼" underlayment).

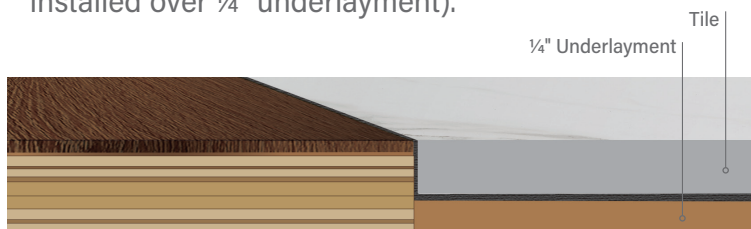

Corner Cuts

- To show the nine layers of sturdy engineered wood

