

# ARDEX CG™ Concrete Guard

## High-Performance, Waterborne Acrylic Concrete Sealer

Seals and protects all uncoated, absorbent concrete and masonry surfaces, including ARDEX Toppings. Please refer to the individual product brochures.

### Key Features



- Interior and exterior
- Nonflammable
- UV stable

### Installation

- **Packaging:** 1 Gallon / 3.79 L Container
- **Coverage:**
  - Gray over broom finish: 150-200 sq. ft. (14-19 sq. m) per gallon
  - Gray over smooth finish: 200-400 sq. ft. (19-37 sq. m) per gallon
  - Clear over broom finish: 200-300 sq. ft. (19-28 sq. m) per gallon
  - Clear over smooth finish: 400-600 sq. ft. (37-56 sq. m) per gallon
- **Apply with:** 3/8" (9.5 mm) nap roller
- **Drying time:** (minimum at 70°F/21°C) to touch: 1 hour
- **Apply second coat:** 2 to 4 hours
- **Walkable:** 24 hours

### Performance

- **Solids content:** 40%
- **VOC:** Max. 249 g/L calculated SCAQMD 1113
- **Exceeds ADA requirements**
- **USDA/FDA FSIS Directive 1000.4, Revision 1 Approved**

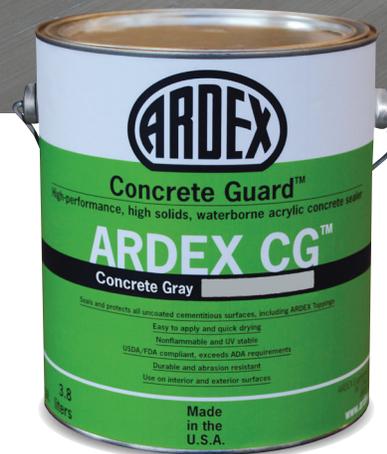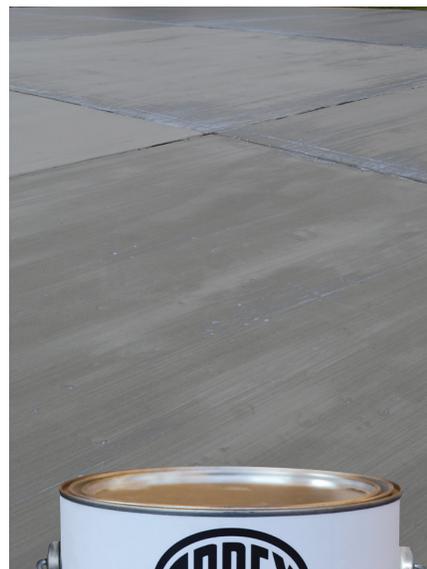

ENGINEERED CONCRETE  
REPAIR SYSTEMS



AMERICAS

+1-724-203-5000  
888-512-7339

[www.ardexamericas.com](http://www.ardexamericas.com)