

# ARDEX CP™

## Concrete Patch

Trowel-grade, cementitious topping for filling and repairing concrete above, on or below grade. Engineered with Portland cement and select high-performance polymers.

**Install over:** Interior and exterior concrete floors, walls, steps and ramps.

### Key Features


- Freeze-thaw resistant
- Suitable for foot and rubber tire traffic
- Easy to apply and hardens quickly
- Horizontal and vertical application

### Installation

- **Packaging:** 40 lb bag
- **Coverage:** 22.5 sq. ft. at 1/4" (21.1 m<sup>2</sup> at 6 mm) per bag
  - Neat: 1/4" to 1/2" (6 to 12 mm) neat
  - Aggregate: up to 2" (5 cm)
- **Working time:** 30 minutes
- **Pot life:** 30 minutes
- **Walkable:** 2 hours
- **Apply:**
  - ARDEX CD™ in 4 hours
  - ARDEX CG™ in 24 hours

### Performance

- **ASTM C109 (air mod) Compressive Strength:**
  - 3,600 psi (253 kg/cm<sup>2</sup>) at 28 days
- **VOC:** 0

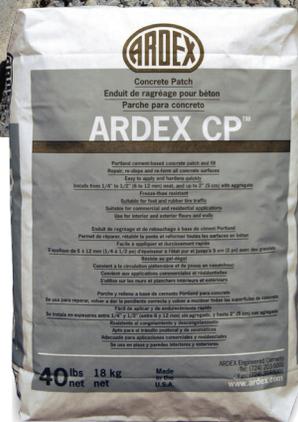

ENGINEERED CONCRETE  
REPAIR SYSTEMS



AMERICAS

+1-724-203-5000  
888-512-7339

[www.ardexamericas.com](http://www.ardexamericas.com)