

ARDEX K 22 F™


High Flow, Fiber Reinforced,
Self-Leveling Underlayment

**CHOOSE FIBER
REINFORCED**



- Low Prep:** Excellent on challenging substrates
- Fiber Reinforced:** For superior performance
- High Flow:** Allows for easy installation
- High Compressive Strength:** 6,000 psi (420 kg/cm²)
- Coverage:** 50 sq. ft. per bag at 1/8" (4.5 m² at 3 mm)
- Thickness:** Install from 1/8" (3 mm) to 1 1/4" (3 cm) thick neat and up to 2" (5 cm) with aggregate
- Install:** Floor coverings in as little as 24 hours

For complete technical documentation, please see the Technical Data Sheet at www.ardexamericas.com

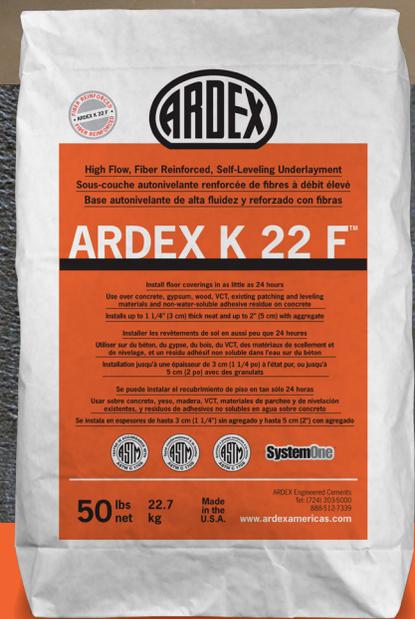

ARDEX Americas
400 Ardex Park Drive
Aliquippa, PA 15001
888-512-7339

www.ardexamericas.com

