

ARDEX TL 1000™

Self-Leveling Underlayment

**High-performance floor leveling
and outstanding value for large
and super-format tile installations!**

Fast leveling of floors prior to installing
tile or stone

Ideal for large and super-format tile installations

Install up to 1 1/4" (3 cm) neat

Walk on in 4-5 hours

Install most tile or stone* in just 6 hours

Easy to mix with just water – no additives required

Coverage

25 sq. ft. per bag at 1/4" (2.3 sq. m at 6 mm)


Thickness of Installation

1/4" (6 mm) minimum (average; can be tapered)

1 1/4" (3 cm) maximum

For complete technical documentation, please see the
Technical Data Sheet at www.ardexamericas.com

SystemOne™

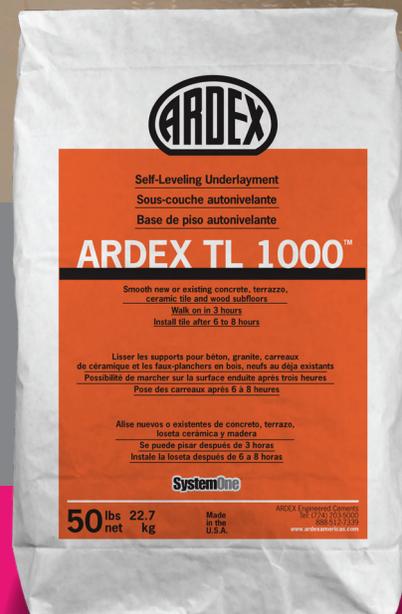

tile & stone
Installation Systems

ARDEX Americas
400 Ardex Park Drive
Aliquippa, PA 15001
888-512-7339
www.ardexamericas.com