

ARDEX X 90 OUTDOOR™

Microtec3 Rapid-Set, Flexible Tile and Stone Mortar

Description: A revolutionary innovation in mortar technology that is formulated with specialty, high-performance ARDEX cements, polymers and microfibers to deliver maximum protection against the harshest weather conditions and provide the highest levels of efflorescence resistance for exterior tile and stone applications. ARDEX X 90 OUTDOOR can be installed over substrates with temperatures as low as 40°F (5°C) and can withstand driving rains or be grouted in only 2 hours!

Maximum weatherproof protection against the harshest elements for outdoor tile and stone installations!

Key Features



ARDEX Microtec3 is the new level in mortar standards!

- Highest levels of freeze thaw resistance - Tested at 150+ freeze thaw cycles (7 times greater than the ANSI 118.15 standard requirement of 20 cycles)
- Maximum efflorescence resistance
- Outstanding rapid-setting properties, even at temperatures as low as 40°F / 5°C
- Heavy and driving rain-resistant after only 2 hours
- Traffic and grout after just 2 hours!
- Very creamy, easy-to-apply consistency
- Extended open time: up to 30 minutes!
- Extra long pot life of 60 minutes

Installation

Packaging:	40 lb. (18 kg.) bag
Coverage:	1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) Sq. Notch Trowel 95 sq. ft. (8.8 sq. m)
Open Time:	Up to 30 minutes
Pot Life:	1 hour
Adjustment Time:	15-20 minutes
Time to Grout:	2 hours
Performance:	VOC: 0

ARDEX tile & stone
Installation Systems

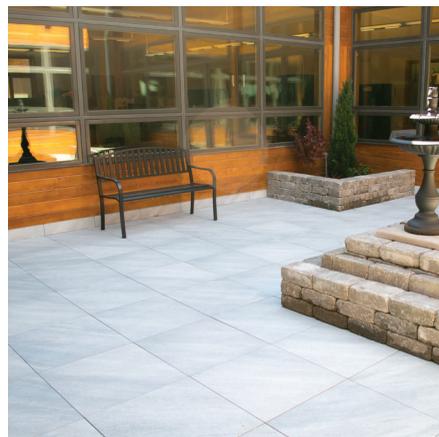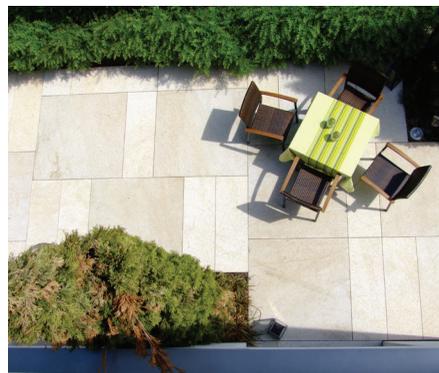

Visit www.youtube.com/ARDEX101 to watch ARDEX product demonstration video.
For easy-to-use ARDEX Product Calculators and Product Information On the Go, download the ARDEX App at the iTunes Store or Google Play.



#3778 - 04/17

ARDEX MORTAR



AMERICAS

888-512-7339

724-203-5000

www.ardexamericas.com