



Product Specification	
VICTORIA™	200 & 201 SERIES
GRAB BARS 18", 24", 36", 42"	

Applicable Features & Installation Types

- Stainless steel construction
- Offering (2) substrate specific installation types
- Technologies for both wet and dry areas
- Patented anchoring for waterproofed systems
- Minimal residential style accessories

BUY US ONCE FOR LIFE

CODES / STANDARDS COMPLIANCE

Meets or exceeds the following at date of manufacture:

- All applicable US Federal and State material regulations
- ASTM F446 Standards and conforms to ADA guidelines

T	Complete Kit	Anchor PermaTile™ Rough-In
Tile Thickness Range 5/32" – 1/2" (4mm – 13mm)		Tile Substrates 1/2" Integrate into Substrate



Pictured: T200-011-BN

G	Complete Kit	Anchor Surface Mounting Plate
Gypsum Wallboard Surfaces		Wallboard Substrates 1/2" or 5/8", Attach to Blocking Only




Pictured: T200-022-ORB

TX	Trim Only Kit	Mates with (sold separately) PT = Rough-In Only Kit
Tile Thickness Range 5/32" – 1/2" (4mm – 13mm)		



Pictured: T201-011-BLK

PT	Rough-In Only Kit	Mates with (sold separately) TX = Trim Only Kit
Tile Thickness Range 5/32" – 1/2" (4mm – 13mm)		Tile Substrates 1/2" Integrate into Substrate

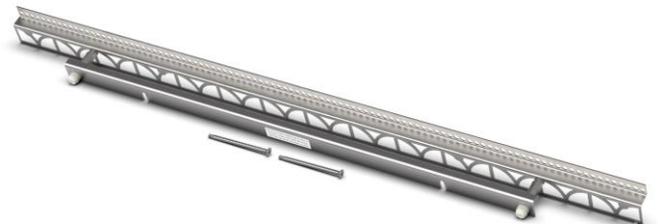

Pictured: PT100-509


T

Installation Type	Anchor	Tile Thickness Range	Compatible Substrates
Tile	PermaTile™ Rough-In	5/32" – 1/2" (4mm – 13mm)	<ul style="list-style-type: none">• 1/2" Cementitious• 1/2" Foam-core• Sheet membrane• Liquid membrane


• Waterproof system
• Use in wet & dry areas

USE ONLY LATEX MODIFIED THINSET THAT MEET ANSI A118.4 / A118.15 PERFORMANCE STANDARDS

INSTALLATION OF PERMATILE™ ROUGH-IN ANCHOR

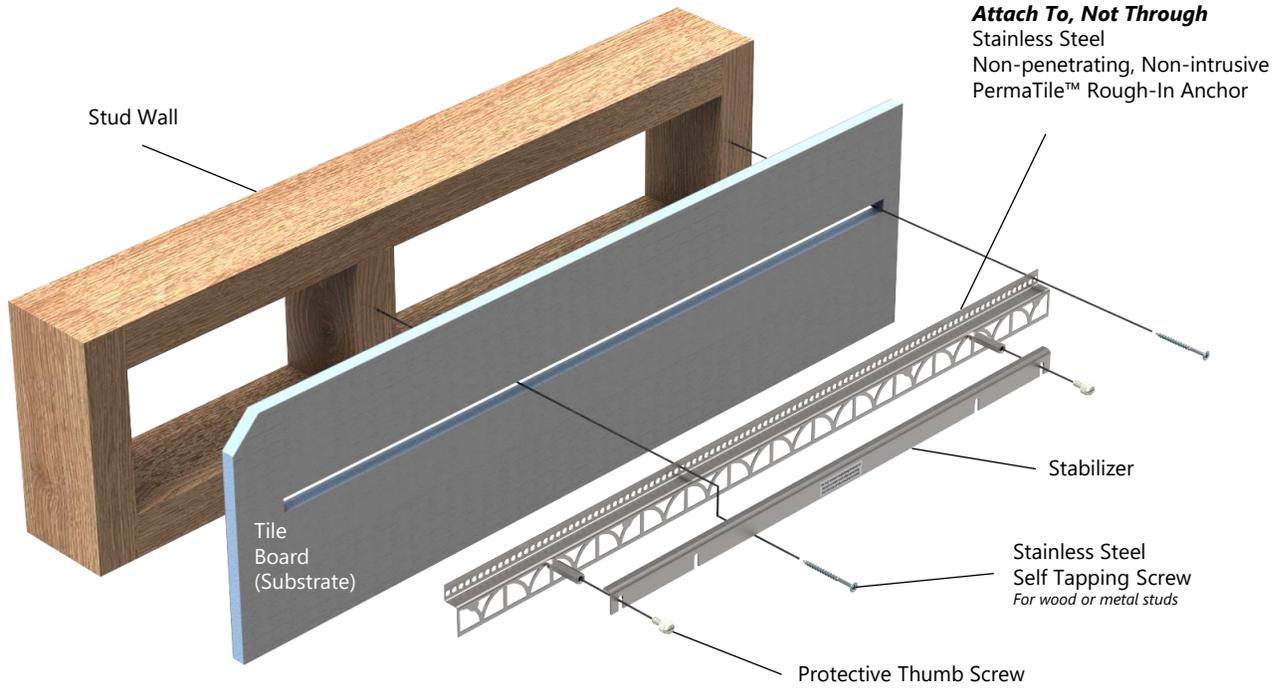

INSTALLATION OF GRAB BAR

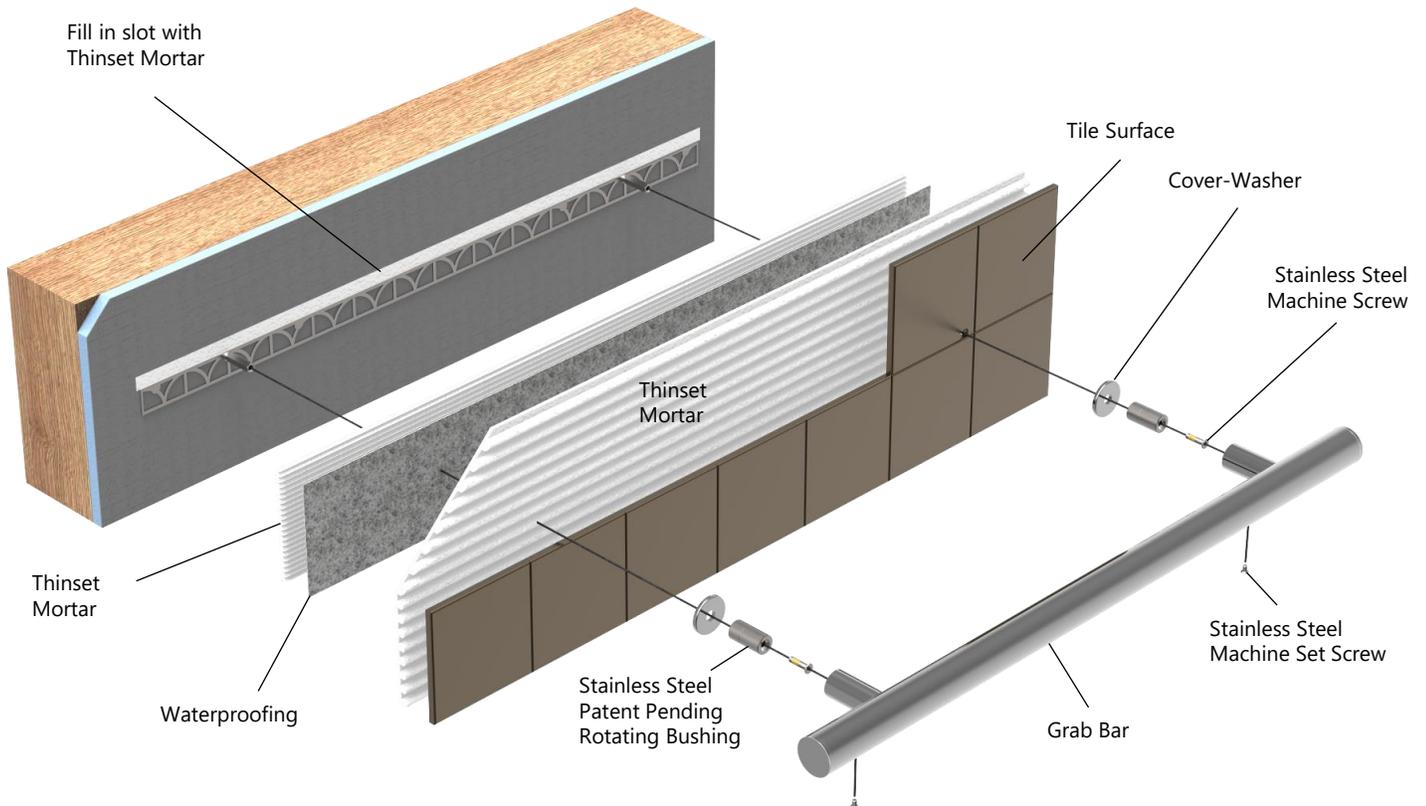

G

Installation Type

Gypsum Wallboard (drywall)

Anchor

Surface Mounting Plate

Tile Thickness Range


n/a

Compatible Substrates


Wallboard 1/2" or 5/8"

FOR DRY AREAS ONLY

INSTALLATION OF SURFACE MOUNTING PLATE

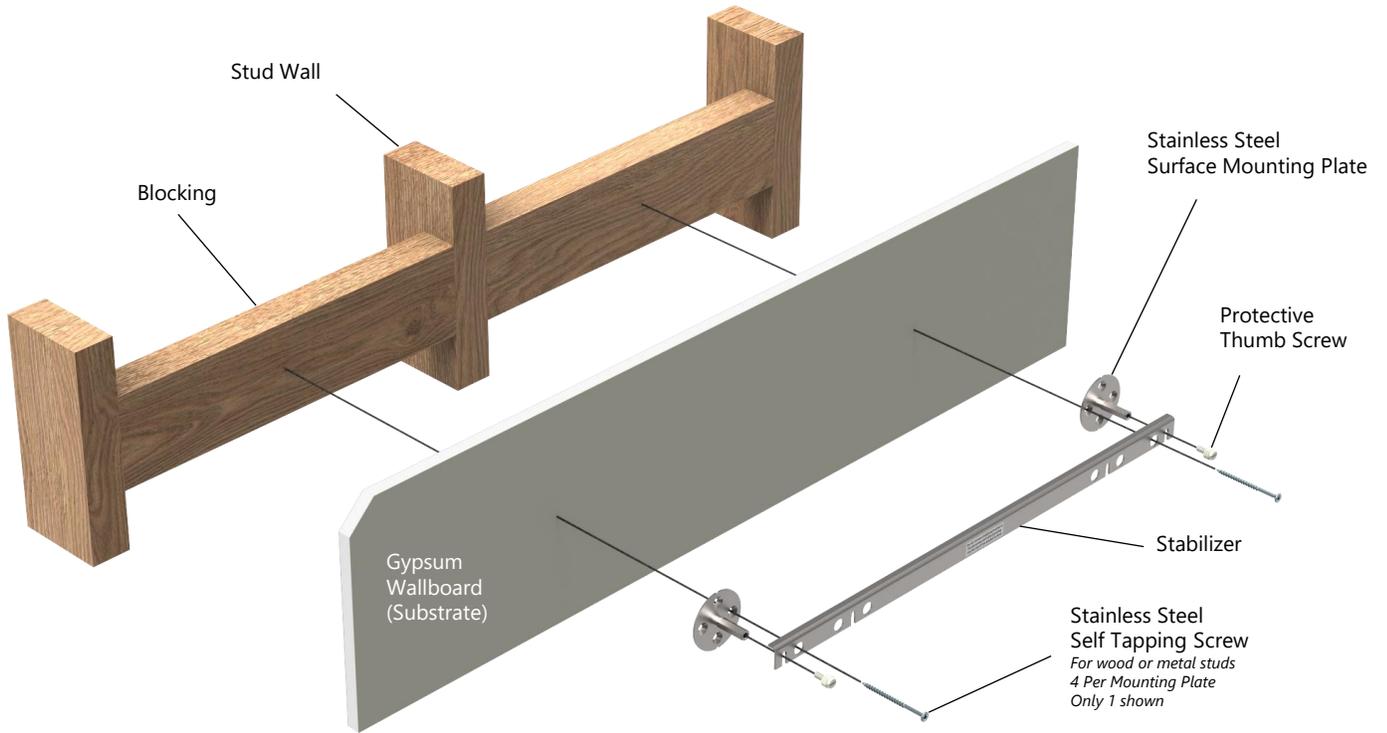


INSTALLATION OF GRAB BAR

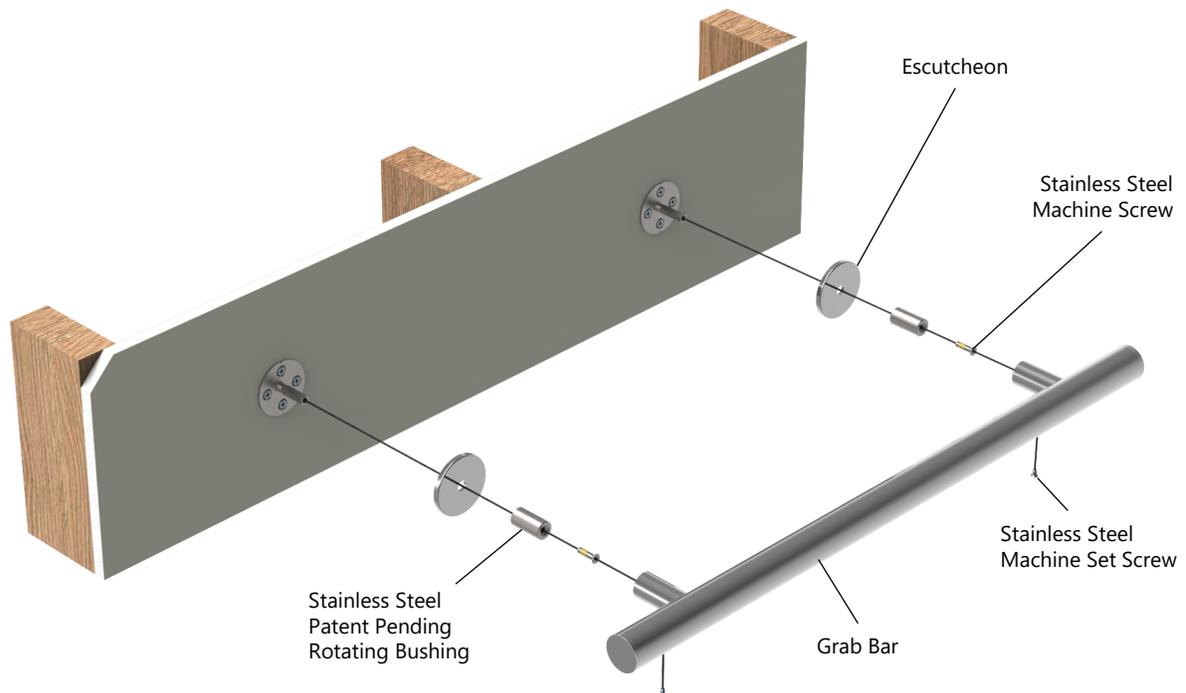


T	Installation Type	Anchor	Tile Thickness Range	Compatible Substrates	<ul style="list-style-type: none"> • Waterproof system • Use in wet & dry areas
	Tile	PermaTile™ Rough-In	5/32" – 1/2" (4mm – 13mm)	<ul style="list-style-type: none"> • 1/2" Cementitious • 1/2" Foam-core • Sheet membrane • Liquid membrane 	

USE ONLY LATEX MODIFIED THINSET THAT MEET ANSI A118.4 / A118.15 PERFORMANCE STANDARDS

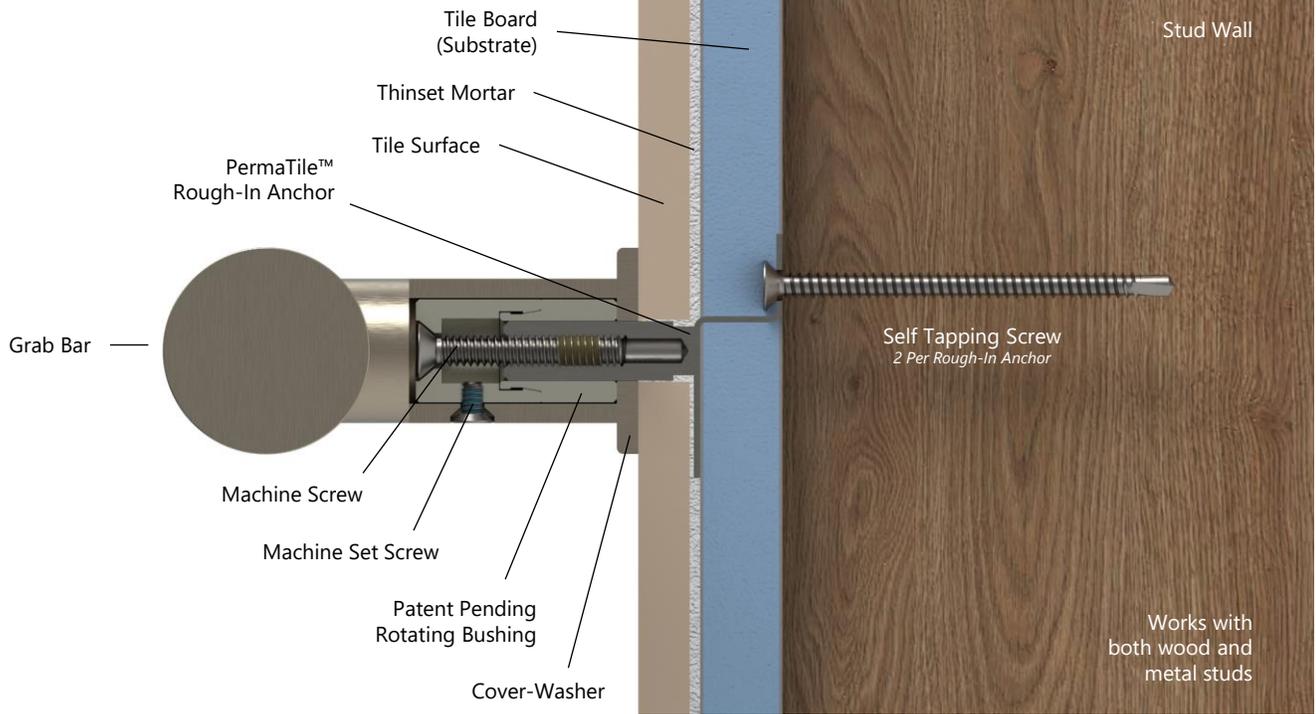

G	Installation Type	Anchor	Tile Thickness Range	Compatible Substrates	FOR DRY AREAS ONLY
	Gypsum Wallboard (drywall)	Surface Mounting Plate	n/a	Wallboard 1/2" or 5/8"	

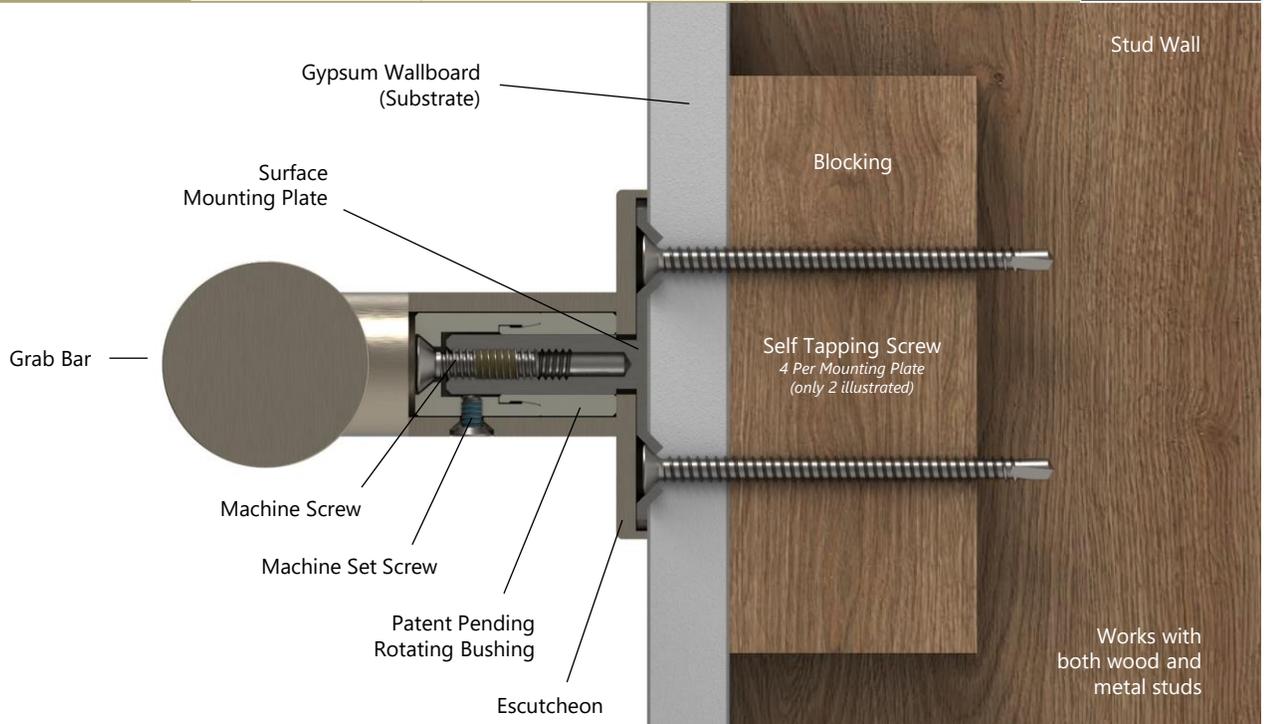

T

Installation Type

Anchor

Tile Thickness Range

Compatible Substrates

Tile

PermaTile™
Rough-In

5/32" – 1/2"
(4mm – 13mm)


- 1/2" Cementitious
- 1/2" Foam-core
- Sheet membrane
- Liquid membrane

- Waterproof system
- Use in wet & dry areas

USE ONLY LATEX MODIFIED THINSET THAT MEET ANSI A118.4 / A118.15 PERFORMANCE STANDARDS

STRAIGHT GRAB BAR WITH CONTEMPORARY CAP

PRODUCT DIMENSIONS *(units are in both inches and mm)*

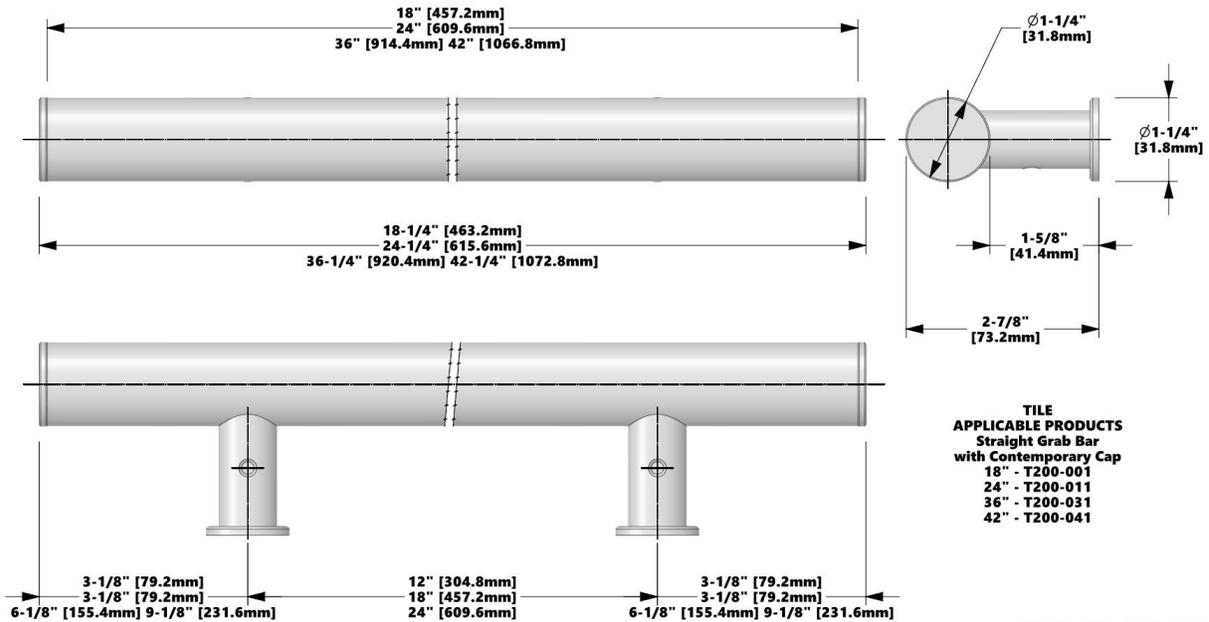


TILE APPLICABLE PRODUCTS
Straight Grab Bar with Contemporary Cap
18" - T200-001
24" - T200-011
36" - T200-031
42" - T200-041

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES

STRAIGHT GRAB BAR WITH TRADITIONAL CAP

PRODUCT DIMENSIONS *(units are in both inches and mm)*

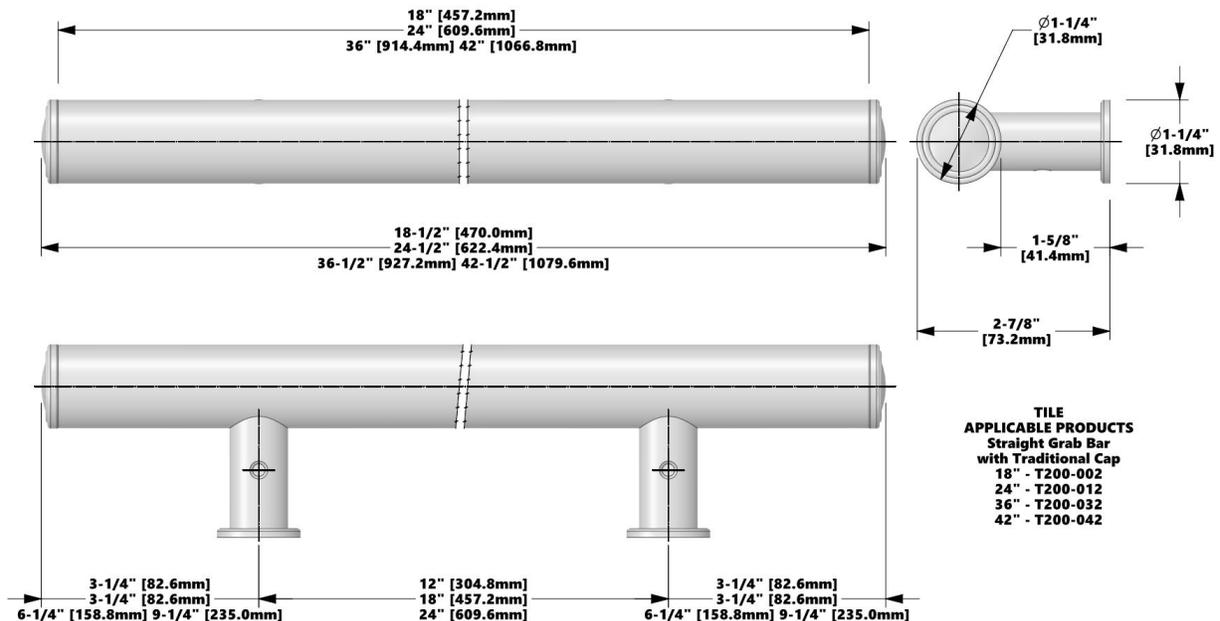

TILE APPLICABLE PRODUCTS
Straight Grab Bar with Traditional Cap
18" - T200-002
24" - T200-012
36" - T200-032
42" - T200-042

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES



p: 828-322-9273 | f: 828-304-1076
tilewareproducts.com | info@tilewareproducts.com

T

Installation Type

Anchor

Tile Thickness Range

Compatible Substrates

Tile

PermaTile™
Rough-In

5/32" – 1/2"
(4mm – 13mm)


- 1/2" Cementitious
- 1/2" Foam-core
- Sheet membrane
- Liquid membrane

- Waterproof system
- Use in wet & dry areas

USE ONLY LATEX MODIFIED THINSET THAT MEET ANSI A118.4 / A118.15 PERFORMANCE STANDARDS


COMBINATION STRAIGHT GRAB BAR WITH CONTEMPORARY CAP

PRODUCT DIMENSIONS
(units are in both inches and mm)

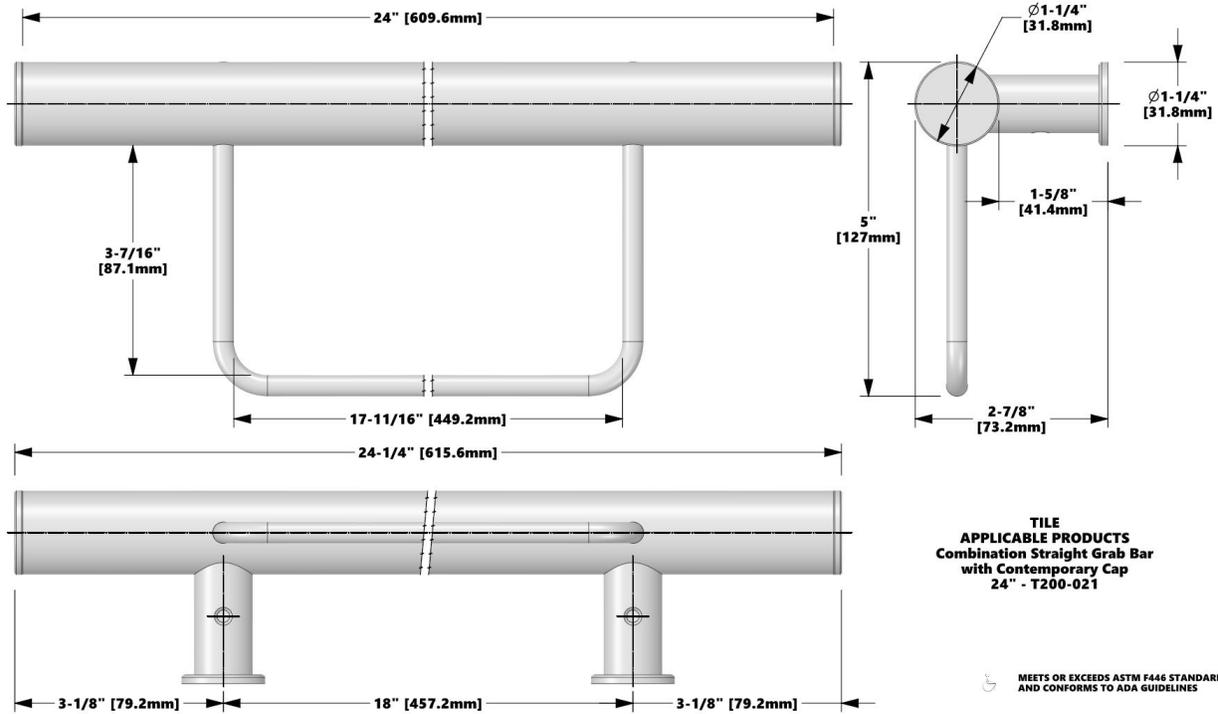

COMBINATION STRAIGHT GRAB BAR WITH TRADITIONAL CAP



PRODUCT DIMENSIONS
(units are in both inches and mm)

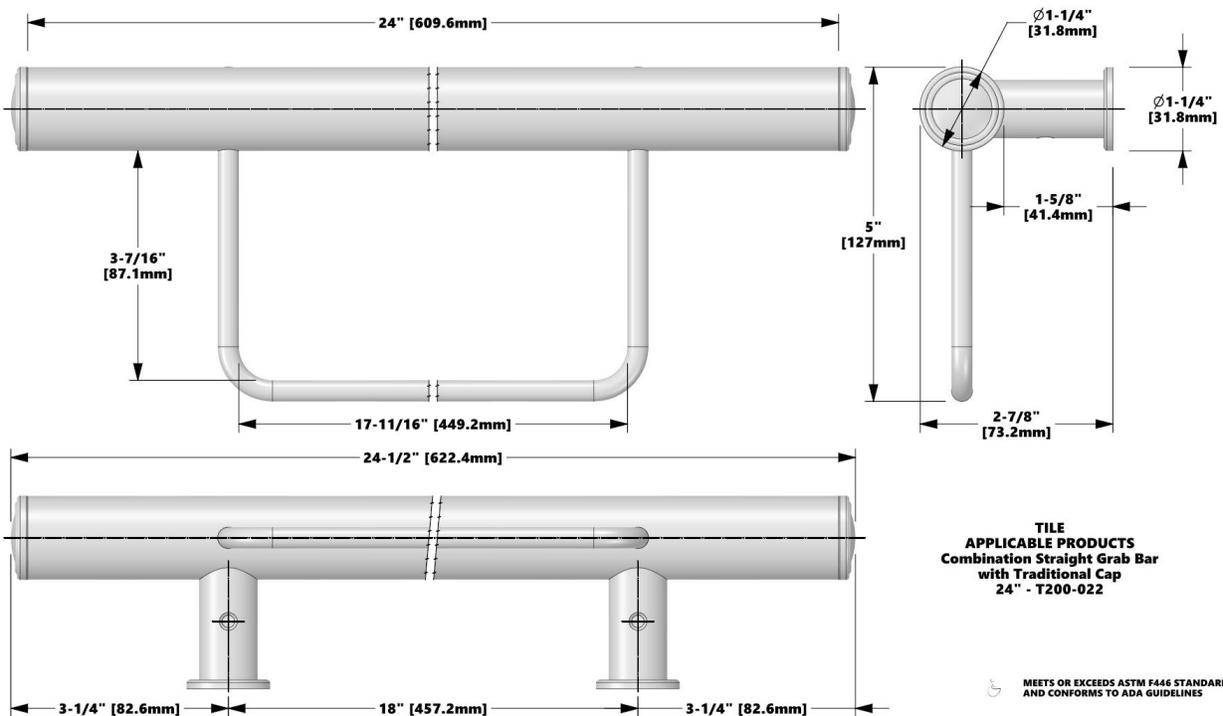

T	Installation Type	Anchor	Tile Thickness Range	Compatible Substrates	<ul style="list-style-type: none"> Waterproof system Use in wet & dry areas
	Tile	PermaTile™ Rough-In	5/32" – 1/2" (4mm – 13mm)	<ul style="list-style-type: none"> 1/2" Cementitious 1/2" Foam-core Sheet membrane Liquid membrane 	

USE ONLY LATEX MODIFIED THINSET THAT MEET ANSI A118.4 / A118.15 PERFORMANCE STANDARDS



CURVED GRAB BAR WITH CONTEMPORARY CAP	PRODUCT DIMENSIONS <i>(units are in both inches and mm)</i>
--	---

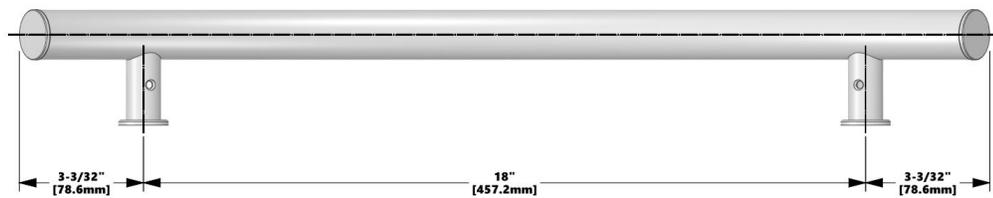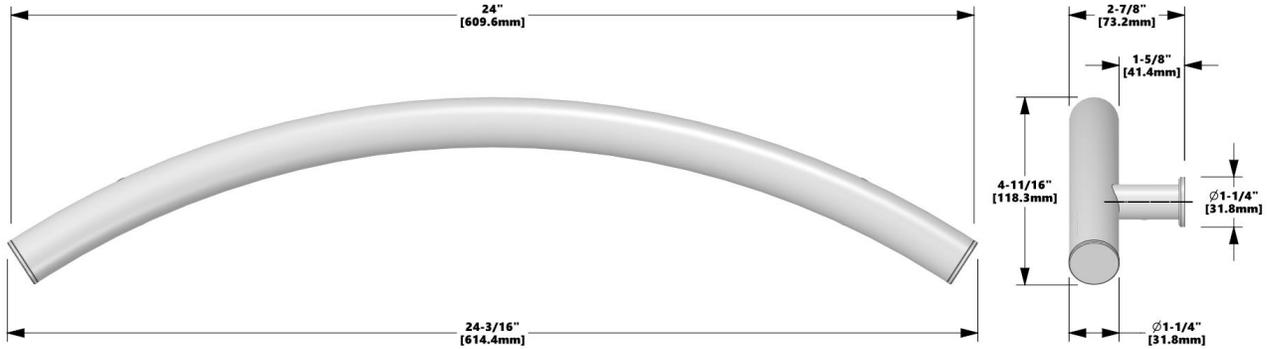

TILE APPLICABLE PRODUCTS
Curved Grab Bar with Contemporary Cap
24" - T201-011

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES

CURVED GRAB BAR WITH TRADITIONAL CAP	PRODUCT DIMENSIONS <i>(units are in both inches and mm)</i>
---	---

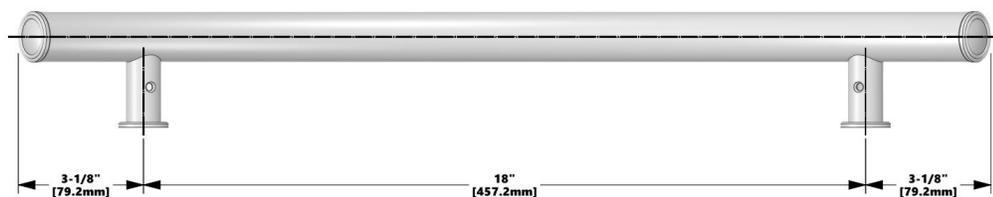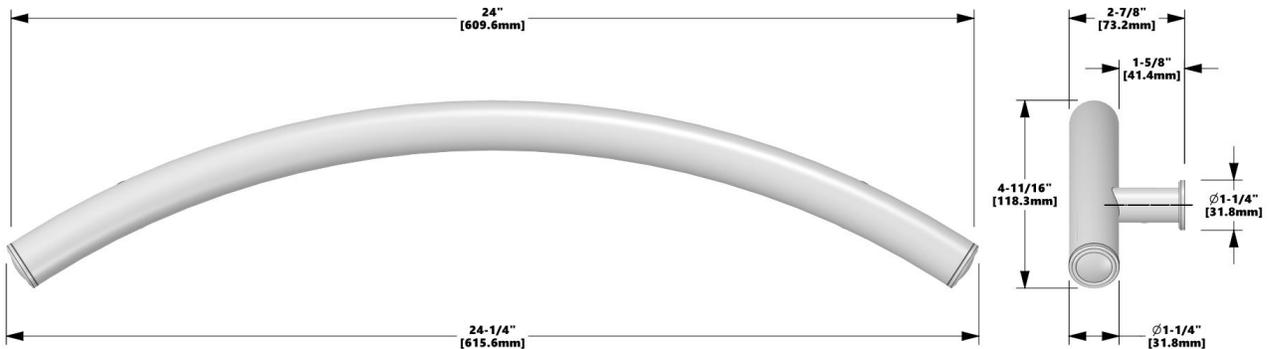

TILE APPLICABLE PRODUCTS
Curved Grab Bar with Traditional Cap
24" - T201-012

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES



p: 828-322-9273 | f: 828-304-1076
tilewareproducts.com | info@tilewareproducts.com

T

Installation Type

Anchor

Tile Thickness Range

Compatible Substrates

Tile

PermaTile™
Rough-In

5/32" – 1/2"
(4mm – 13mm)



- 1/2" Cementitious
- 1/2" Foam-core
- Sheet membrane
- Liquid membrane

- Waterproof system
- Use in wet & dry areas

USE ONLY LATEX MODIFIED THINSET THAT MEET ANSI A118.4 / A118.15 PERFORMANCE STANDARDS

COMBINATION CURVED GRAB BAR WITH CONTEMPORARY CAP

PRODUCT DIMENSIONS (units are in both inches and mm)

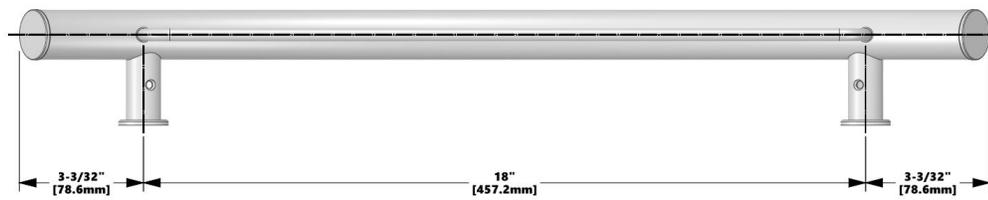
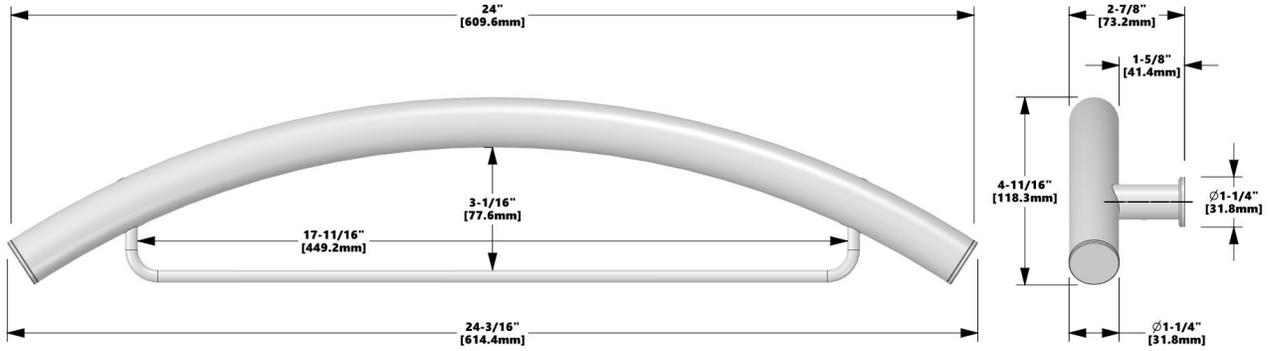


TILE APPLICABLE PRODUCTS
Combination Curved Grab Bar with Contemporary Cap
24" - T201-021

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES

COMBINATION CURVED GRAB BAR WITH TRADITIONAL CAP

PRODUCT DIMENSIONS (units are in both inches and mm)

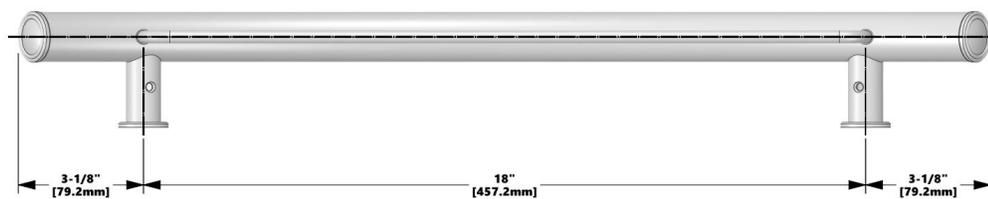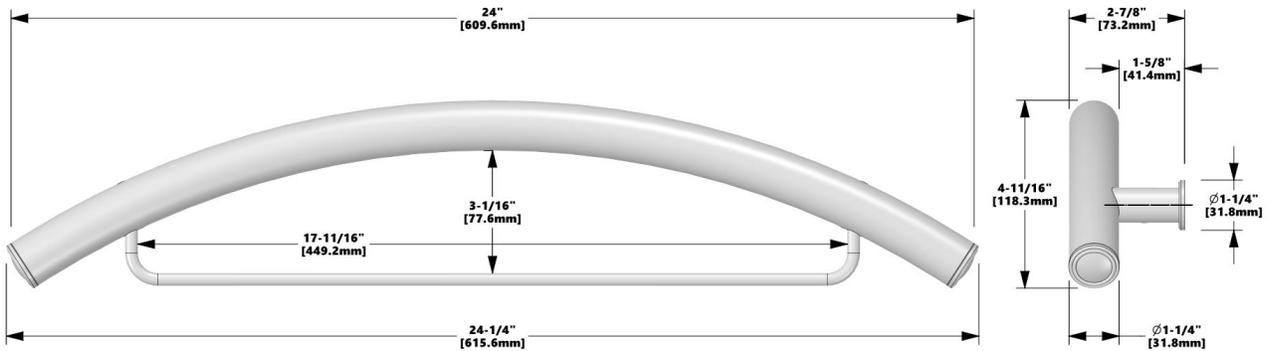

TILE APPLICABLE PRODUCTS
Combination Curved Grab Bar with Traditional Cap
24" - T201-022

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES



G

Installation Type

Gypsum Wallboard (drywall)

Anchor

Surface Mounting Plate

Tile Thickness Range

n/a


Compatible Substrates

Wallboard 1/2" or 5/8"

FOR DRY AREAS ONLY

STRAIGHT GRAB BAR WITH CONTEMPORARY CAP

PRODUCT DIMENSIONS (units are in both inches and mm)

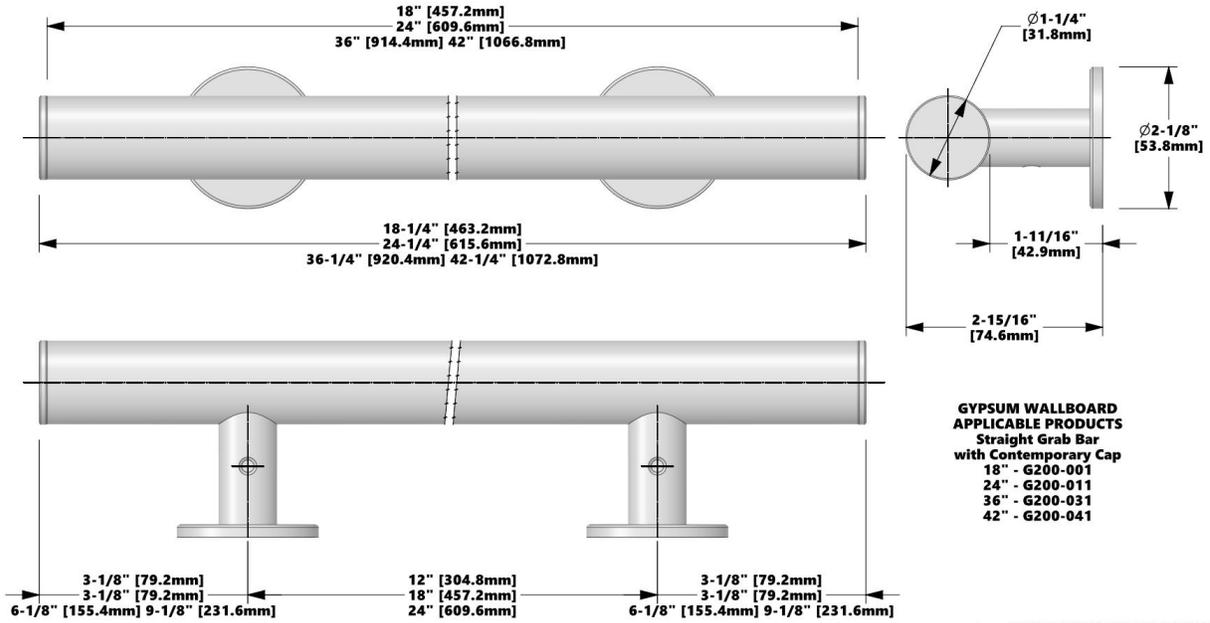


GYPSUM WALLBOARD APPLICABLE PRODUCTS
Straight Grab Bar with Contemporary Cap
18" - G200-001
24" - G200-011
36" - G200-031
42" - G200-041

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES

STRAIGHT GRAB BAR WITH TRADITIONAL CAP

PRODUCT DIMENSIONS (units are in both inches and mm)

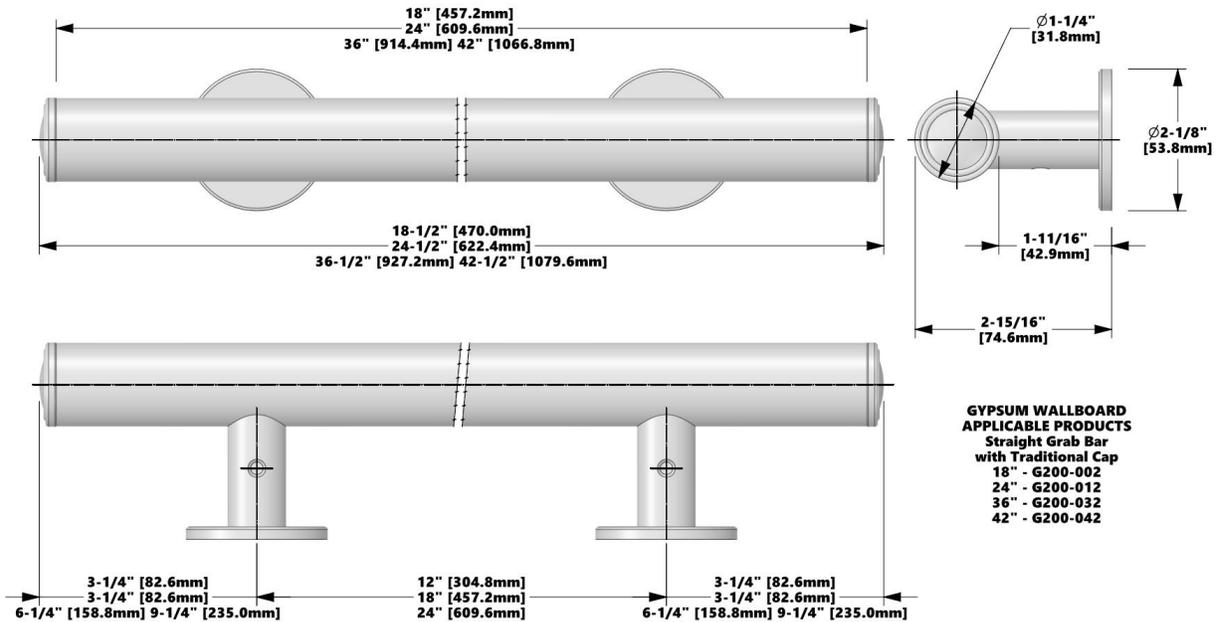

GYPSUM WALLBOARD APPLICABLE PRODUCTS
Straight Grab Bar with Traditional Cap
18" - G200-002
24" - G200-012
36" - G200-032
42" - G200-042

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES

G

Installation Type

Gypsum Wallboard (drywall)

Anchor

Surface Mounting Plate

Tile Thickness Range

n/a

Compatible Substrates


Wallboard 1/2" or 5/8"

FOR DRY AREAS ONLY

COMBINATION STRAIGHT GRAB BAR WITH CONTEMPORARY CAP

PRODUCT DIMENSIONS


(units are in both inches and mm)

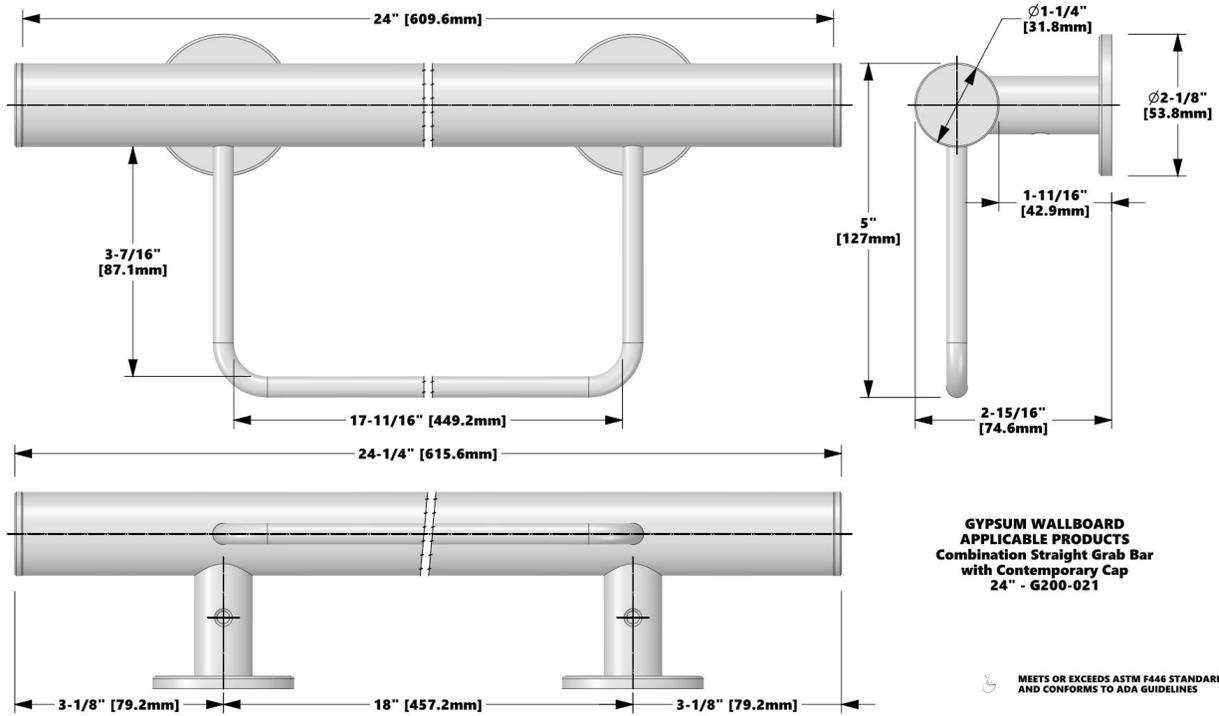

COMBINATION STRAIGHT GRAB BAR WITH TRADITIONAL CAP

PRODUCT DIMENSIONS

(units are in both inches and mm)

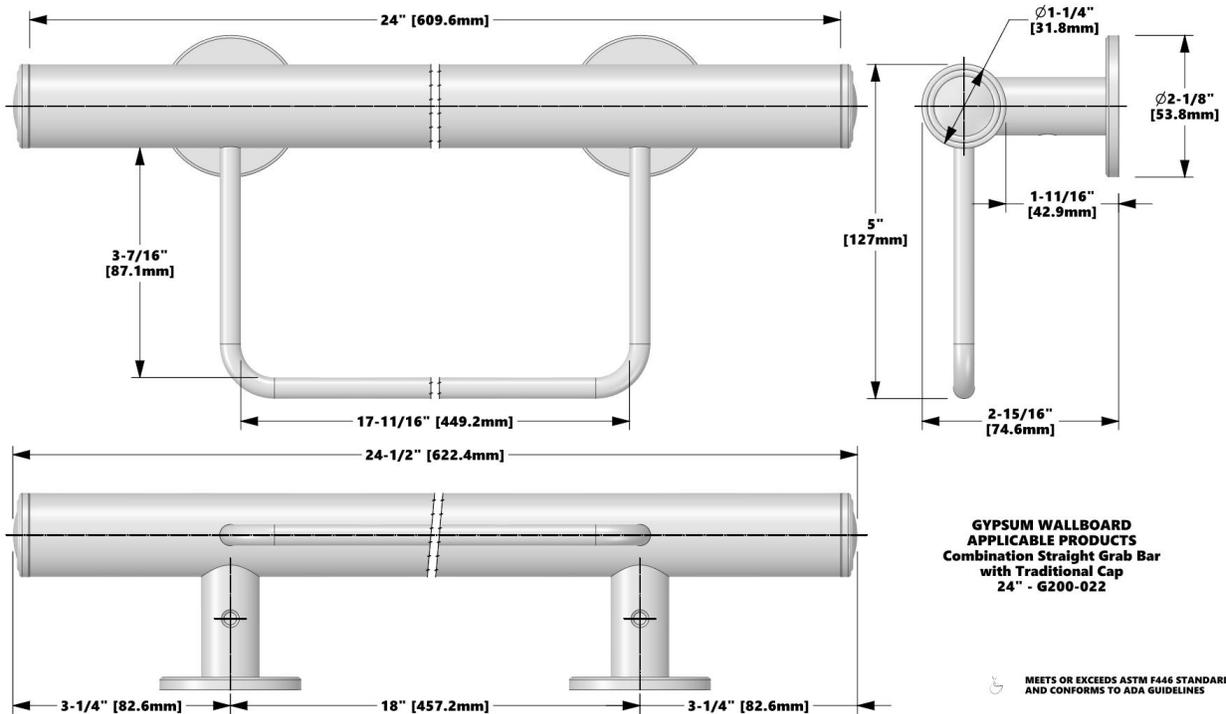

G

Installation Type

Gypsum Wallboard (drywall)

Anchor

Surface Mounting Plate

Tile Thickness Range

n/a



Compatible Substrates

Wallboard 1/2" or 5/8"

FOR DRY AREAS ONLY

CURVED GRAB BAR WITH CONTEMPORARY CAP

PRODUCT DIMENSIONS (units are in both inches and mm)

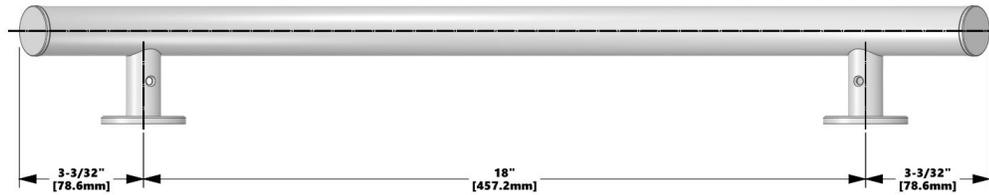
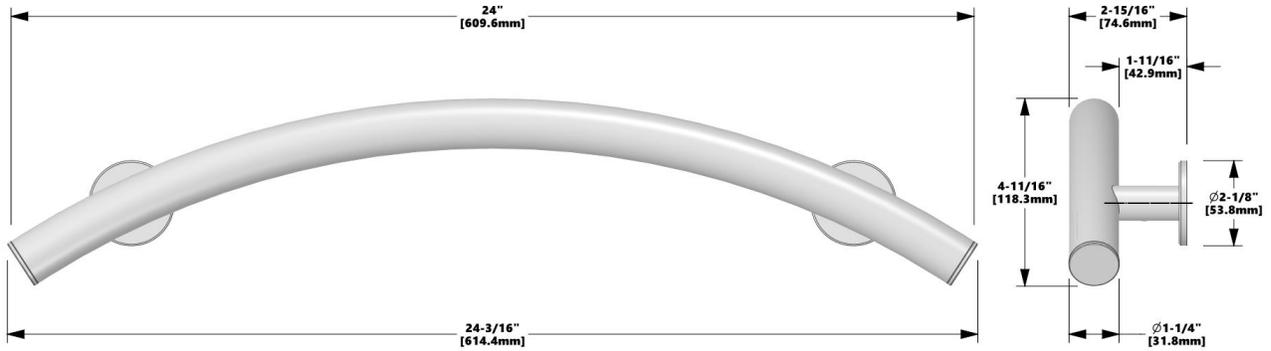


GYPSUM WALLBOARD APPLICABLE PRODUCTS
Curved Grab Bar with Contemporary Cap
24" - G201-011

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES

CURVED GRAB BAR WITH TRADITIONAL CAP

PRODUCT DIMENSIONS (units are in both inches and mm)

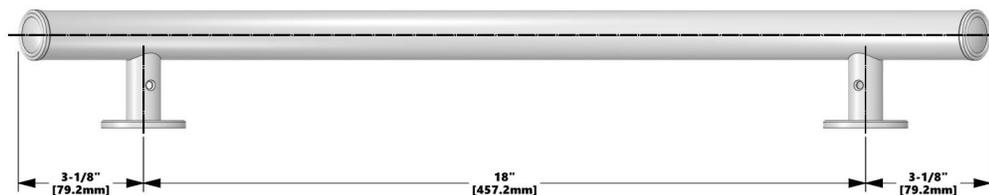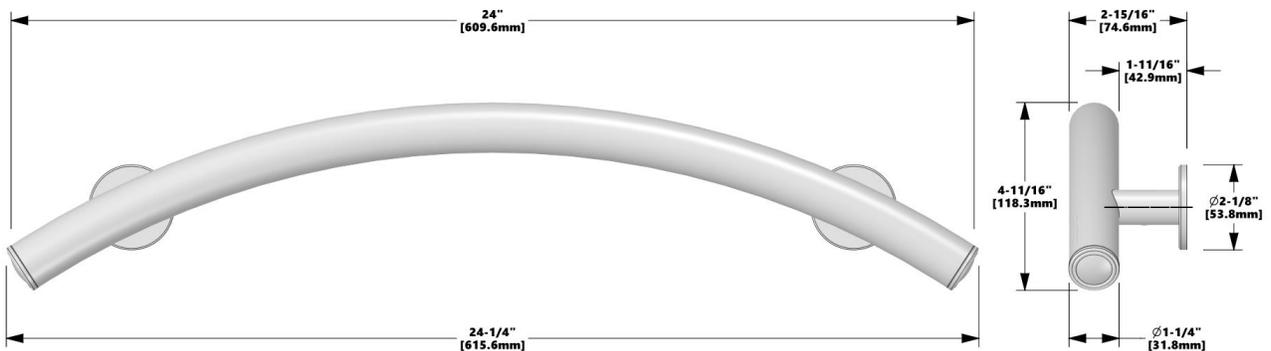

GYPSUM WALLBOARD APPLICABLE PRODUCTS
Curved Grab Bar with Traditional Cap
24" - G201-012

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES



G

Installation Type

Gypsum Wallboard (drywall)

Anchor

Surface Mounting Plate

Tile Thickness Range

n/a

Compatible Substrates




Wallboard 1/2" or 5/8"

FOR DRY AREAS ONLY

COMBINATION CURVED GRAB BAR WITH CONTEMPORARY CAP

PRODUCT DIMENSIONS

(units are in both inches and mm)

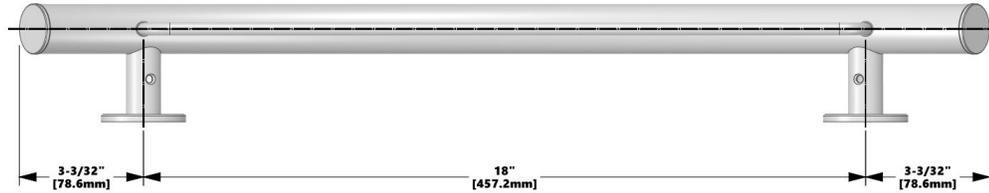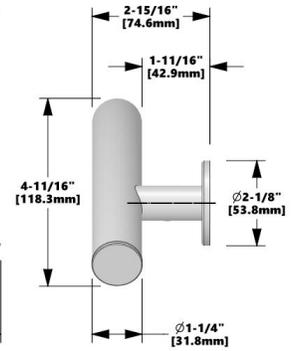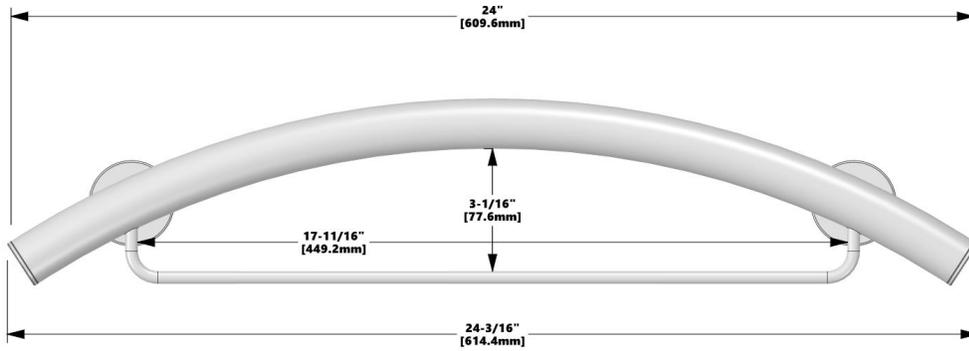




GYPSUM WALLBOARD APPLICABLE PRODUCTS
Combination Curved Grab Bar with Contemporary Cap
24" - G201-021

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES

COMBINATION CURVED GRAB BAR WITH TRADITIONAL CAP

PRODUCT DIMENSIONS

(units are in both inches and mm)

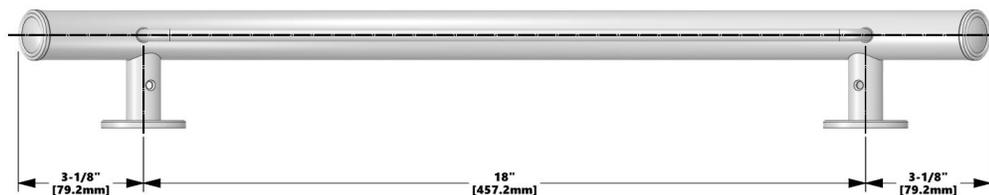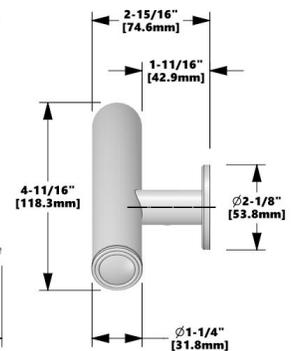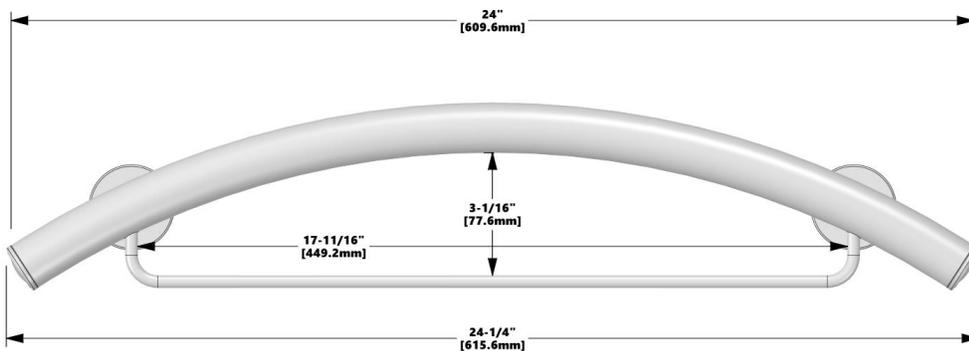

GYPSUM WALLBOARD APPLICABLE PRODUCTS
Combination Curved Grab Bar with Traditional Cap
24" - G201-022

MEETS OR EXCEEDS ASTM F446 STANDARDS AND CONFORMS TO ADA GUIDELINES



PRODUCT MATRIX

PREFIX CODE = INSTALLATION TYPE			PermaTile™ Rough-In Only Kit		Model (SKU)	PRODUCT DESCRIPTION	CAP STYLE	COLOR (METAL FINISH)				PRODUCT WEIGHT Kit Color Codes				
T	G	TX	PT	PT100-514	200-001-COLOR	ADA 18" Straight Grab Bar Contemporary Cap	1	PC	BN	ORB	BLK	COMING SOON	T	2.75 lbs	G	2.75 lbs
													TX	1.75 lbs	PT	0.90 lbs
T	G	TX	PT	PT100-514	200-002-COLOR	ADA 18" Straight Grab Bar Traditional Cap	2	PC	BN	ORB	BLK	COMING SOON	T	2.75 lbs	G	2.75 lbs
													TX	1.75 lbs	PT	0.90 lbs
T	G	TX	PT	PT100-509	200-011-COLOR	ADA 24" Straight Grab Bar Contemporary Cap	1	PC	BN	ORB	BLK	COMING SOON	T	3.10 lbs	G	3.10 lbs
													TX	2.00 lbs	PT	1.00 lbs
T	G	TX	PT	PT100-509	200-012-COLOR	ADA 24" Straight Grab Bar Traditional Cap	2	PC	BN	ORB	BLK	COMING SOON	T	3.10 lbs	G	3.10 lbs
													TX	2.00 lbs	PT	1.00 lbs
T	G	TX	PT	PT100-509	200-021-COLOR	ADA Combination 24" Straight Grab Bar Contemporary Cap	1	PC	BN	ORB	n/a	COMING SOON	T	4.95 lbs	G	4.95 lbs
													TX	2.95 lbs	PT	1.00 lbs
T	G	TX	PT	PT100-509	200-022-COLOR	ADA Combination 24" Straight Grab Bar Traditional Cap	2	PC	BN	ORB	n/a	COMING SOON	T	4.95 lbs	G	4.95 lbs
													TX	2.95 lbs	PT	1.00 lbs
T	G	TX	PT	PT100-515	200-031-COLOR	ADA 36" Straight Grab Bar Contemporary Cap	1	PC	BN	ORB	n/a	COMING SOON	T	3.90 lbs	G	3.90 lbs
													TX	2.70 lbs	PT	1.10 lbs
T	G	TX	PT	PT100-515	200-032-COLOR	ADA 36" Straight Grab Bar Traditional Cap	2	PC	BN	ORB	n/a	COMING SOON	T	3.90 lbs	G	3.90 lbs
													TX	2.70 lbs	PT	1.10 lbs
T	G	TX	PT	PT100-515	200-041-COLOR	ADA 42" Straight Grab Bar Contemporary Cap	1	PC	BN	n/a	n/a	COMING SOON	T	4.10 lbs	G	4.10 lbs
													TX	2.90 lbs	PT	1.10 lbs
T	G	TX	PT	PT100-515	200-042-COLOR	ADA 42" Straight Grab Bar Traditional Cap	2	PC	BN	n/a	n/a	COMING SOON	T	4.10 lbs	G	4.10 lbs
													TX	2.90 lbs	PT	1.10 lbs
T	G	TX	PT	PT100-509	201-011-COLOR	ADA 24" Curved Grab Bar Contemporary Cap	1	PC	BN	ORB	BLK	COMING SOON	T	4.40 lbs	G	4.40 lbs
													TX	2.40 lbs	PT	1.00 lbs
T	G	TX	PT	PT100-509	201-012-COLOR	ADA 24" Curved Grab Bar Traditional Cap	2	PC	BN	ORB	BLK	COMING SOON	T	4.40 lbs	G	4.40 lbs
													TX	2.40 lbs	PT	1.00 lbs
T	G	TX	PT	PT100-509	201-021-COLOR	ADA Combination 24" Curved Grab Bar Contemporary Cap	1	PC	BN	ORB	n/a	COMING SOON	T	4.90 lbs	G	4.90 lbs
													TX	2.90 lbs	PT	1.00 lbs
T	G	TX	PT	PT100-509	201-022-COLOR	ADA Combination 24" Curved Grab Bar Traditional Cap	2	PC	BN	ORB	n/a	COMING SOON	T	4.90 lbs	G	4.90 lbs
													TX	2.90 lbs	PT	1.00 lbs

PRODUCT CONFIGURATOR PROCEDURE

- Select a 'Prefix Code' and attach to 'Model (SKU)'
Example: T200-001
- Replace the word 'Color' with desired suffix 'Metal Finish'
Example: T200-001-PC

CAP STYLE CODE

- 1 Contemporary
- 2 Traditional

COLOR (METAL FINISH)

- PC Polished Chrome
- BN Brushed Nickel
- ORB Oil Rub Bronze
- BLK Matte Black

INSTALLATION MATRIX

PREFIX CODE	INSTALLATION TYPE	MATL THICKNESS RANGE	COMPATIBLE SUBSTRATES	WET AREAS... WITH APPROVED WATERPROOFING	DRY AREAS
T	Tile PermaTile™ Rough-In	5/32" to 1/2" (4mm to 13mm)	Tile specific cementitious or foam-core 1/2" only	YES	YES
G	Gypsum Wallboard Surface Mounting Plate	n/a	Wallboard 1/2" or 5/8" Attach to Blocking Only	NO	YES
TX	Tile – Mates with (sold separately) PT = Rough-In Only Kit	5/32" to 1/2" (4mm to 13mm)	Tile specific cementitious or foam-core 1/2" only	YES	YES
PT	Tile – Mates with (sold separately) TX = Trim Only Kit	5/32" to 1/2" (4mm to 13mm)	Tile specific cementitious or foam-core 1/2" only	YES	YES



p: 828-322-9273 | f: 828-304-1076
tilewareproducts.com | info@tilewareproducts.com

page 13 of 13
TW-F01-400-200201 | REV: 12-15-20



TILEWARE

PRODUCTS

INNOVATE • ENGINEER • CONNECT

TileWare is continually innovating, engineering and connecting new utilities into tile applications. Our objective is to expand the function and usefulness of tile, convincing consumers that mortar based integration permanently fixes difficult mounting problems.

tilewareproducts.com

info@tilewareproducts.com

Technical Support:

(828)-322-9273

Hickory, NC (EST)

©2012-2020 TileWare Global, LLC
dba TileWare Products. All rights reserved.
PermaTile™ Fastener Patented.
U.S. Patent No. 8,161,700
Australian Patent No. 2011205360
Canadian Patent No. 2,787,033