

# NOW YOU'RE ALL SET.

A line of thin-set mortars specifically formulated for Schluter membranes and boards.



## Schluter SET® Premium Unmodified Thin-set Mortar

- Approved to set tile, including porcelain tile, over Schluter boards and membranes
- 50 lbs - 22.7 kg bag



ANSI A118.1T



## Schluter ALL-SET® Specialized Modified Thin-set Mortar

- Engineered for use both under and over all DITRA and KERDI products
- 50 lbs - 22.7 kg bag



ANSI A118.4T, A118.11, and A118.15T



## Schluter FAST-SET® Specialized Rapid-setting Modified Thin-set Mortar

- Ready to grout in 4 hours for fast-track projects
- 50 lbs - 22.7 kg bag



ANSI A118.4TF, A118.11, and A118.15TF

## Schluter®-PRIMER-U Universal primer




## Bond with Confidence.

Ready-to-use, universal primer used to enhance adhesion of mortars for hard-to-bond substrates such as gypsum underlayment, raised access panels, and existing tile.



Find out more!



### Schluter Systems L.P.

194 Pleasant Ridge Road, Plattsburgh, NY 12901-5841  
Tel.: 800-472-4588 • Fax: 800-477-9783


### Schluter Systems (Canada) Inc.

21100 chemin Ste-Marie, Ste-Anne-de-Belleveue, QC H9X 3Y8  
Tel.: 800-667-8746 • Fax: 877-667-2410

[www.schluter.com](http://www.schluter.com)

## Schluter® Thin-set Mortar

Made for Schluter® membranes and boards

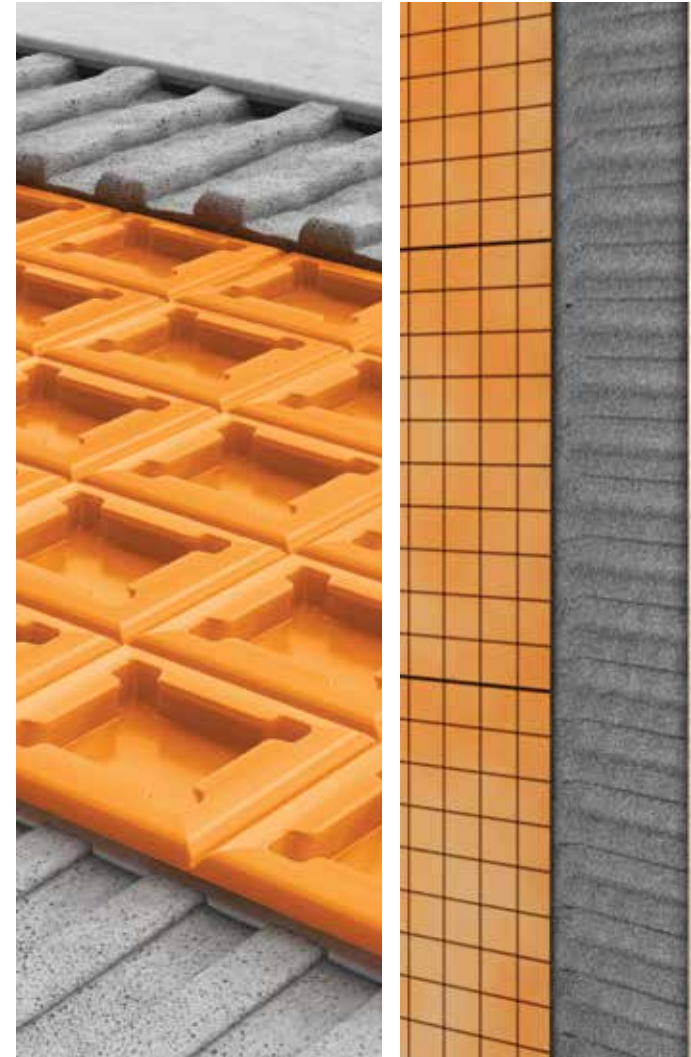

SET, ALL-SET and FAST-SET are trademarks of Schluter Systems

© 2022 Schluter Systems L.P. and affiliates. All Rights Reserved.

555-408 09/2022



PROFILE OF INNOVATION

# FEATURES

# SUITABLE USES



The line of Schluter thin-set mortar is designed by Schluter, for Schluter products. All Schluter Systems' thin-set mortars, including the ALL-SET and FAST-SET modified varieties can be used to set tile over Schluter®-DITRA, DITRA-HEAT, KERDI, and KERDI-BOARD products.

### Workability

- Sag resistant
- Smooth and creamy
- Easy to handle and spread

### Applications

- Large and heavy tile (LHT)
- Floors and walls
- Natural stone, ceramic (incl. porcelain)

### Guaranteed Compatibility

- Providing "single source" supply
- No need to rely on third-party mortars
- No more finger-pointing!

| Application  | Schluter SET® | Schluter ALL-SET® | Schluter FAST-SET® |
|--|---------------|-------------------|--------------------|
| <b>DITRA® over</b>   |               |                   |                    |
| Plywood/OSB  | X             | ✓                 | ✓                  |
| Concrete   | ✓             | ✓                 | ✓                  |
| Gypsum   | ✓             | ✓                 | ✓                  |
| Vinyl flooring   | X             | X                 | ✓                  |
| <b>KERDI® over</b>   |               |                   |                    |
| Gypsum board   | ✓             | ✓                 | ✓                  |
| Cement backerboard   | ✓             | ✓                 | ✓                  |
| Fiber-cement board   | ✓             | ✓                 | ✓                  |
| Portland cement mortar   | ✓             | ✓                 | ✓                  |
| KERDI®-SHOWER prefabricated substrates   | ✓             | ✓                 | ✓                  |
| <b>TILE over DITRA® &amp; KERDI®</b>   |               |                   |                    |
| Ceramic  | ✓             | ✓                 | ✓                  |
| Porcelain  | ✓             | ✓                 | ✓                  |
| Natural stone (e.g., granite, marble, etc.)  | ✓             | ✓                 | ✓                  |
| <ul style="list-style-type: none"> <li>• For Schluter Systems® applications, refer to the Schluter®-DITRA®, Schluter®-DITRA-HEAT™, and Schluter®-Shower System Installation Handbooks.</li> <li>• For other applications, refer to the TCNA Handbook for Ceramic, Glass, and Stone Tile Installation and TTMAC Specification Guide 09 30 00 Tile Installation Manual.</li> <li>• Contact Schluter®-Systems Technical Services for installation of glass tile, resin-backed tile, and/or moisture sensitive stone.</li> </ul> |               |                   |                    |

✓ = Approved use    X = Not recommended

