


# MSI


Making Dream Surfaces Attainable

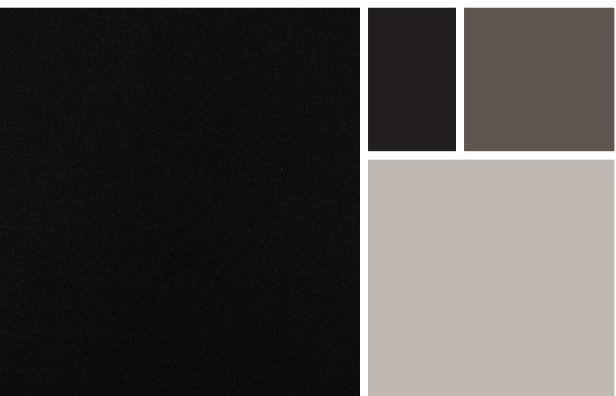

Domino  
Porcelain Collection

[www.msisurfaces.com](http://www.msisurfaces.com)

## Colors

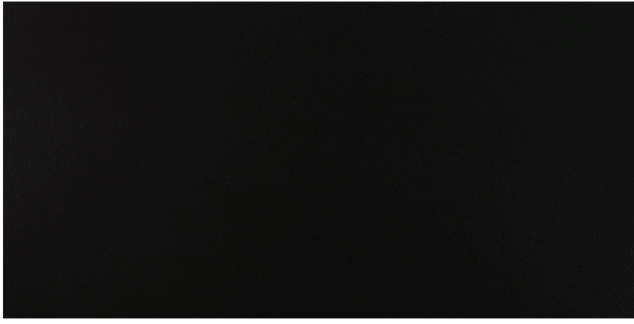

Domino Black 12\"/>



Domino White 12\"/>

Size	Thickness	BLACK	WHITE
12x24 Matte	3/8"	NBLA1224-N	NWHI1224-N
24x24 Matte	3/8"	NBLA2424-N	NWHI2424-N
12x24 Polished	3/8"		NWHI1224P-N
24x24 Polished	3/8"		NWHI2424P-N

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	II	V1	Polished DCOF - < 0.42 Wet Matte DCOF - > 0.42	> 275 lbf	< 0.5%	6
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL		●	●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

Domino Porcelain puts your love of all things retro on display in your kitchen and bath. Our vintage-inspired checkerboard collection pairs black and white tiles together for a classic yet modern look. Or select all-white or all-black tiles for a chic monochromatic design. Perfect for residential and commercial spaces, Domino offers several formats including popular 12"x24" and large format 24"x24" .

### Technical Information

Primary Colors: Black, White  
 Material Type: Glazed Porcelain  
 Finish: Matte, Polished, and Glossy

### Features At A Glance

- White and Black offered in both matte and polished finishes
- Matte finish are full body and the polished tiles are through body
- Ideal for residential and commercial installation applications
- Stocked in 12x24, 24x24

### Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



### Disclaimer:

**Wet Cutting Instruction:** We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

\*No claims accepted after tile installation.