


MSI

Making Dream Surfaces Attainable

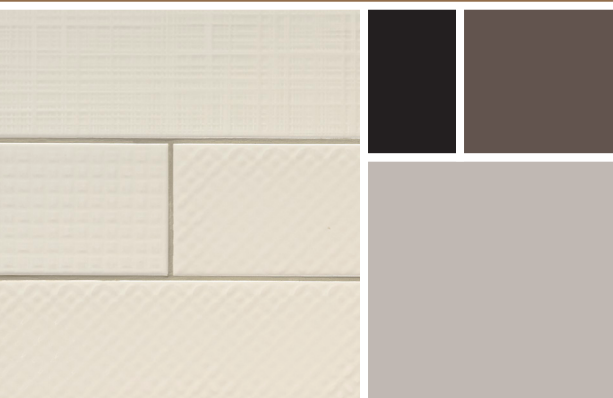

Urbano

Ceramic Collection

www.msisurfaces.com

Colors 4"x12"




Crema



Dusk




Graphite




Ink



Pure



Warm Concrete




Navy




Crema Mix



Dusk Mix



Graphite Mix




Ink Mix



Pure Mix



Warm Concrete Mix



Navy Mix

Size	Thickness	CREMA	DUSK	GRAPHITE	INK	PURE	WARM CONCRETE	NAVY
Tile	3/8"	NURBCRE4X12	NURBDUS4X12	NURBGRA4X12	NURBINK4X12	NURBPUR4X12	NURBWARCON4X12	NURBNAV4X12
MIX	3/8"	NURBCREMIX4X12	NURBDUSMIX4X12	NURBGRAMIX4X12	NURBINKMIX4X12	NURBPURMIX4X12	NURBWARCONMIX4X12	NURBNAVMIX4X12
Bullnose	3/8"	NURBCRE4X12BN	NURBDUS4X12BN	NURBGRA4X12BN	NURBINK4X12BN	NURBPUR4X12BN	NURBWARCON4X12BN	NURBNAV4X12BN

APPLICATIONS	Backsplash	Wall	PEI Rating	Variation	COF	Freeze/Thaw	Breaking Strength	Water Absorption	Hardness	Chemical Resistance
RESIDENTIAL			N/A	V1	N/A	Resistant	< 275 lbf	N/A	N/A	Resistant
LIGHT COMMERCIAL										
HEAVY COMMERCIAL										

The Urbano Collection makes a style statement in a palette of cool and calming muted hues, like subtle creams, grays, and concrete and blues- looks- all the way striking black. These 4"x12" glossy wall tiles have an authentic hand crafted look and feel that give your kitchen, bath, living room, or other interior space a touch of contemporary detail.

Technical Information

Primary Colors: Cream, Gray, Black, White, Taupe, Brown, Navy
Material Type: Ceramic
Finish: Glossy

Features At A Glance

- Available in 4x12 tiles
- In six time-honored solid colors as well as 3D mixed
- In every color featuring designs of zig-zag, rope, herringbone, and more.

Trim



4" x 12" Bullnose

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.

