

# ARDEX TerraMaxx® TSL


## Pedestal Systems

### ARDEX Exterior Tile & Stone Systems

Beautiful aesthetics, combined with the long-term durability of tile and stone has led to enhanced popularity for outdoor installations. Especially in today's health-conscious environment, outdoor living spaces are now even more desirable in residential, as well as commercial venues. However, exterior installations are subject to harsh weather and very difficult environments. Issues such as efflorescence, staining, discoloring and dis-bonding are commonplace with exterior installations. These problems are caused by sedentary and evaporating water and moisture.

Introducing ARDEX TerraMaxx® TSL Pedestal Systems, raised system installations ideal for 2 cm+ porcelain tile. ARDEX Exterior Tile & Stone Installation Systems manage rain and snow water by allowing the water to move freely through the system and then moving the water away from the installation. Architects, landscape designers, contractors and installation professionals can now confidently specify tile and stone in outdoor spaces without fear of the inherent risks associated with an exterior tile and stone installations.

### ARDEX TerraMaxx® TSL Pedestal Systems

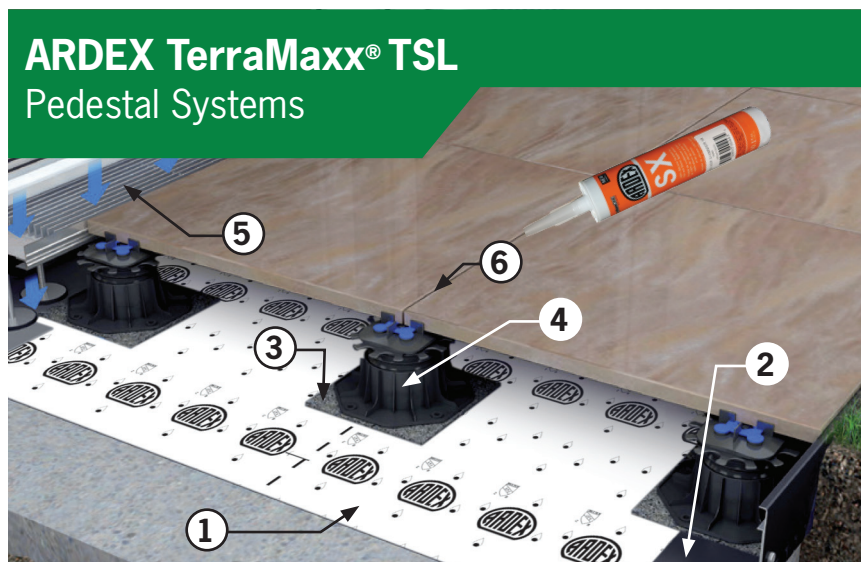

- Preassembled in 5 sizes and adapter (80mm)
- Adjustable height from 1" to 7 7/8"
- Easy leveling and pitch adjustment up to 9% (no tools required)
- Integrated spacers 1/16" (2mm) with available 3/16" (5 mm) spacer attachment
- Built-in sound dampener, reduces sound up to 30 dB

1. ARDEX SK 175™ Waterproofing Membrane and Vapor Retarder\*
2. ARDEX ProFin® KL Profile
3. ARDEX TerraMaxx® TSL Pad
4. ARDEX TerraMaxx® TSL Pedestal
5. ARDEX ProDrain® Drain Grate
6. ARDEX SX™ 100% Silicone Sealant; or joints can be left open



\*ARDEX SK 175™ Waterproofing Membrane and Vapor Retarder is **NOT** a replacement for waterproofing protection over occupied spaces. Applications over occupied living spaces require an existing, **intact primary roofing membrane** prior to the installation of an ARDEX Exterior System. ARDEX SK 175 is to provide protection against vapor transmission from the substrate. For additional details, contact the ARDEX Technical Department at 1-888-512-7339.




tile & stone  
Installation Systems

[www.ardexamericas.com](http://www.ardexamericas.com)

BUILT BY  
**YOU**  
backed by **ARDEX**

# ARDEX TerraMaxx® TSL

## Pedestal Systems



TSL-XS 26/36 mm



TSL-S 36/43 mm



TSL-M 43/60 mm



TSL-L 58/75 mm



TSL-XL 75/120 mm

**TerraMaxx® TSL-XS 26/36 mm** (no leveling head)

**TerraMaxx® TSL-S 36/43 mm**

**TerraMaxx® TSL-M 43/60 mm**

**TerraMaxx® TSL-L 58/75 mm**

**TerraMaxx® TSL-XL 75/120 mm**

**TerraMaxx® TSL Adaptor** - 3.15" (80mm)

**TerraMaxx® TSL Plug-In Spacer** - Bags of 100

**TerraMaxx® Distance Holder** - Maintains spacing against walls

**TerraMaxx® TSL Pad** - 7.5" x 7.5" x 1/3" (192/192/8 mm) - Packs of 10 Pads

**ProFin® KL Profiles** - Aluminum drainage profile, height and slope adjustable



Adaptor



Spacer



Pad



Distance Holder



KL Profile



**tile & stone**  
Installation Systems

[www.ardexamericas.com](http://www.ardexamericas.com)

**BUILT BY**  
**YOU**  
backed by **ARDEX**