


## FICHE TECHNIQUE MEMBRANE EVA HAUTE DENSITÉ 3MM FILM D'ALUMINIUM OR PARE-VAPEUR "BLACK VELVET"

NUMÉRO DE PRODUIT	<b>11U3EVA-FOIL/200</b>
CONSTRUCTION	MEMBRANE EVA 3mm HAUTE DENSITÉ FILM D'ALUMINIUM OR PARE-VAPEUR 0.3mm
DIMENSIONS	LONGUEUR (DÉROULÉ): 55.45' (16.9 m) CIRCONFÉRENCE DU ROULEAU: 10" (254 cm) HAUTEUR: 43.3" (1.1 m) ÉPAISSEUR: 0.118" (3 mm)
TYPE D'INSTALLATION	PLANCHER STRATIFIÉ BOIS D'INGÉNIERIE À INSTALLATION FLOTTANTE
POIDS	11 LBS (5 kg)/ROULEAU
COUVERTURE	200 PI.CA. (18.6 M2)
PROPRIÉTÉS ACOUSTIQUES	<b>STC: 72 dB</b> (ASTM E90-04, 6" CHAPE DE BÉTON) <b>IIC: 73 dB</b> (ASTM E492-09, 6" CHAPE DE BÉTON)



EMBALLAGE	1 ROULEAU PAR SAC 4 ROULEAUX ATTACHÉES ENSEMBLES
-----------	---

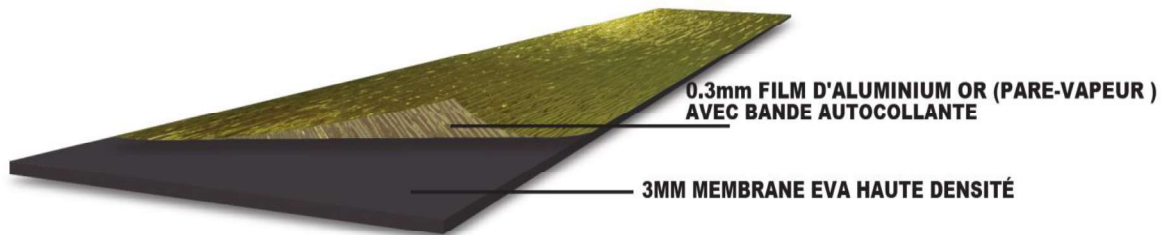


**Power Dekor**  
N O R T H A M E R I C A

800 Avenue Selkirk, Point-Claire, QC H9R 3S3 T: 1-844-MY-DEKOR

# 3mm GOLD FOIL + EVA HIGH DENSITY FOAM UNDERLAY SPECIFICATION SHEET "BLACK VELVET"

<b>ITEM NUMBER</b>	<b>11U3EVA-FOIL/200</b>
<b>CONSTRUCTION</b>	3mm EVA HIGH DENSITY FOAM 0.3mm GOLD FOIL (VAPOR BARRIER)
<b>DIMENSIONS</b>	UNROLLED LENGTH: 55.45' (16.9 m) WIDTH: 10" (254 cm) HEIGHT: 43.3" (1.1 m) THICKNESS: 0.118" (3 mm)
<b>INSTALLATION USES</b>	LAMINATE FLOATING FLOOR ENGINEERED FLOATING FLOOR
<b>WEIGHT</b>	11 LBS (5 kg)/ROLL
<b>COVERAGE</b>	200 SQ. FT. (18.6 SQ. M)
<b>ACOUSTIC PROPERTIES</b>	<b>STC:</b> 72 dB (ASTM E90-04, 6" CONCRETE SLAB) <b>IIC:</b> 73 dB (ASTM E492-09, 6" CONCRETE SLAB)

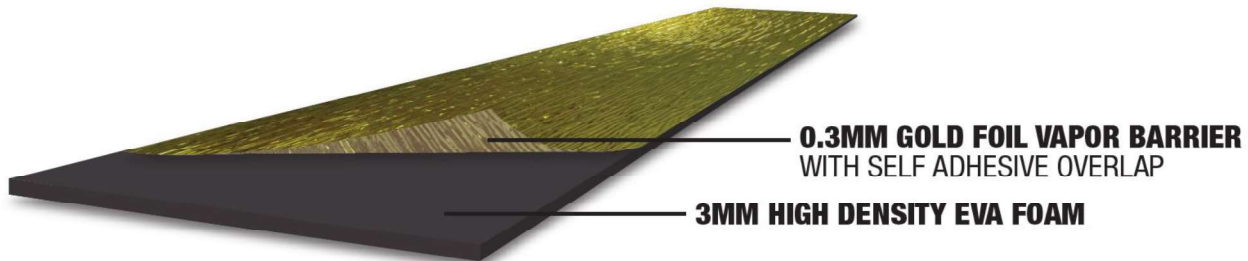

<b>PACKAGING</b>	1 ROLL PER SLEEVE 4 ROLLS STRAPPED TOGETHER
------------------	--



# Power Dekor

N O R T H A M E R I C A