

Angle Fit™ Rubber Stair Treads

Product Specification

1. PROPRIETARY PRODUCT/MANUFACTURER

- 1.1. **Proprietary Product:** Resilient Rubber Stair Treads. For styles utilizing a visually impaired strip in a contrasting color, treads are A.D.A. compliant.

1.1. **Manufacturer:**

Tarkett North America Phone (800) 899-8916
 30000 Aurora Rd.
 Solon, Ohio 44139
 Web: www.tarkett.com
 E-mail: info@tarkett.com

1.2. **Proprietary Product Description:**


- 1.2.1. **Construction:** Tarkett Rubber Stair Treads are manufactured from a homogeneous composition of 100% synthetic rubber, high quality additives, and colorants to meet the performance requirements of ASTM F2169 Standard Specification for Resilient Stair Treads, Type TS, Class 1 and 2, Group 1 and 2. All Tarkett Stair Treads are available with a 2" (5.08 cm) wide strip of contrasting color to comply with A.D.A. and Visually Impaired. Standard formulation exceeds ASTM E 648 Class 1 Flammability requirements.

NOTE: 0.080" (2 mm) thick **vinyl risers** are recommended for the following rubber stair treads.


1.2.2. **Styles & Physical Characteristics:**

(See table on page 2 for more information)

Square Nose:

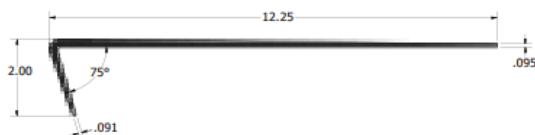

Round Nose:

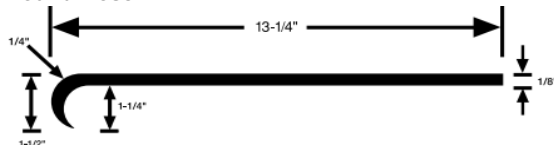

2. PRODUCT PERFORMANCE AND TECHNICAL DATA

- 2.1. **Hardness** (ASTM D 2240): Not less than 85 Shore A
 2.2. **Abrasion Resistance** (ASTM D 3389): Passes
 2.3. **Slip Resistance** (ASTM D 2047): ≥ 0.5 SCOF
 2.4. **Fire Resistance:** ASTM E 648/NFPA 253 (Critical Radiant Flux): Class 1 (Minimum 0.45 W/cm^2)
 2.5. **Smoke Development** (ASTM E 662/NFPA 258): less than 450
 2.6. **CAN/ULC S102.2:** FSR 120 / SDC 460

3. INSTALLATION

See Tarkett Angle Fit Treads & Riser installation instructions for complete details.

3.1. **Adhesives Coverage**

• **Tarkett 965 Flooring & Tread Adhesive**

- Porous Substrate: 1/16x1/16x1/16 SQ notch- 125-150 sq. ft. per gallon
- Non-porous Substrate: 1/16x1/16x1/16 V notch – 150-175 sq. ft. per gallon

• **Tarkett PowerTape** (For Tread Only): 164 lf. per roll

• **Tarkett 946 Premium Contact Adhesive** (For Nose only when the angle of the stair nose is smaller than tread template)

Application: Brush or roller

- 1 quart unit (0.95 liters) – 24 to 36 sq. ft.
- 1 gallon unit (3.79 liters) – 144 to 215 sq. ft.

• **Tarkett 930 Two-Part Epoxy Caulking Compound** (For nose only when the stair nose radius is greater than 1/2" [12.7mm] or in need of repair)

Application: 13.5 oz. cartridge, Gun at 1/4" bead (Use Tarkett 530 dual-cartridge dispenser gun with cartridge)

- Approximately 50 linear ft. /cartridge

4. AVAILABILITY AND COST

Available through authorized Tarkett distributors nationwide.

5. MAINTENANCE

72 hours after installation is completed, initial maintenance procedures must be implemented in accordance with manufacturer's requirements. Refer to Stairwell Maintenance Instructions for complete maintenance details.

6. TECHNICAL SERVICES

Visit us on the web at www.tarkett.com

Contact Technical Support at (800) 899-8916 or E-mail:

Resilient.TechnicalSupport@Tarkett.com

Samples: Submittal samples for verification and approval available upon request from Tarkett. Samples shall be submitted in compliance with the requirements of the contract documents. Accepted and approved samples shall constitute the standard materials which represent materials installed on the project.

7. WARRANTY

Limited 5-year warranty. For complete details, contact Tarkett or an authorized Tarkett distributor.

Tarkett North America

Technical Services Department
 30000 Aurora Road
 Solon, Ohio 44139
 800.899.8916
info@tarkettna.com
www.tarkett.com

Angle Fit™ Rubber Stair Treads

Product Specification

Tread Type	Product Code			Nose	Overall Depth	Nominal Length*	Pieces Per Ctn.	Weight Per Ft.
	Tread Without Riser	Visually Impaired Grit Tape Insert	Visually Impaired Rubber Insert			3', 3.5', & 9 foot are NON-RETURNABLE		
RAISED ROUND SURFACE	RNRD	VIRNRD	VIRNRDS	SQ	12 ¼"	3', 3.5', 4', 4.5', 5', 6', 7', 8'	Up to 6' - 5 pcs - Greater than 6' - 3 pcs	1.4 lbs.
RAISED SQUARE SURFACE	RNSQ	VIRNSQ	VIRNSQS	SQ	12 ¼"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	1.4 lbs.
HAMMERED SURFACE	HMNT	VIHMNT	VIHMNTS	SQ	12 ¼"	3', 3.5', 4', 4.5', 5', 6', 7', 8', 9'	Up to 6' - 5 pcs - Greater than 6' - 3 pcs	1.4 lbs.
HAMMERED SURFACE - EXTENDED DEPTH	HMNTD	VIHMNTD	VIHMNTDS	SQ	14 ¼" DEPTH	3', 3.5', 4', 4.5', 5', 6', 7', 8', 9'	Up to 6' - 5 pcs - Greater than 6' - 3 pcs	2.3 lbs.
DIAMOND	CNN	VICNN	VICNNS	SQ	12 ¼"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	1.4 lbs.
	CN	VICN	VICNS	RD	13 ¼"			2.0 lbs.
RICE PAPER SURFACE	FRPANT	VIFRPANT	VIFRPANTS	SQ	12 ¼"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	1.4 lbs.
	FRPAT	VIFRPAT	VIFRPATS	RD	13 ¼"			2.0 lbs.
CIRCULINITY - FAST LANE PATTERN	CFLNT	VICFLNT	VICFLNTS	SQ	12 ¼"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	1.4 lbs.
	CFLT	VICFLT	VICFLTS	RD	13 ¼"			2.0 lbs.
CUBIS SURFACE	CUBT	VICUBT	VICUBTS	SQ	12 ¼"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	1.4 lbs.
	CUT	VICUT	VICUTS	RD	13 ¼"			2.0 lbs.
BAMBOO SURFACE	BMNT	VIBMNT	VIBMNTS	SQ	12 ¼"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	1.4 lbs.
	BMT	VIBMT	VIBMTS	RD	13 ¼"			2.0 lbs.
SERVICE WEIGHT SAFE-T-GRIP (2 – 1" STRIPS) Gauge Tapering 3/16" to 1/8"	SAN			SQ	12 ¼"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	1.4 lbs.
SERVICE WEIGHT SMOOTH SURFACE (1 – 2" STRIP) Gauge Tapering 3/16" to 1/8"	SN	VISN		SQ.	12 ¼"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	1.4 lbs.

*NOTE: In applications where the staircase is the same width as Tarkett Stair Treads, Nosings, Risers, and Stringers, order the next size up to allow for proper installation.

How to order: (Product Code) (Color Code) (Length) (Nose)

Ex: HMNT 40 4 SQ (Hammered Surface, 40 black, 4 foot, Square nose)

Tarkett North America

Technical Services Department
30000 Aurora Road
Solon, Ohio 44139
800.899.8916
info@tarkettna.com

www.tarkett.com