



MSI

Making Dream Surfaces Attainable

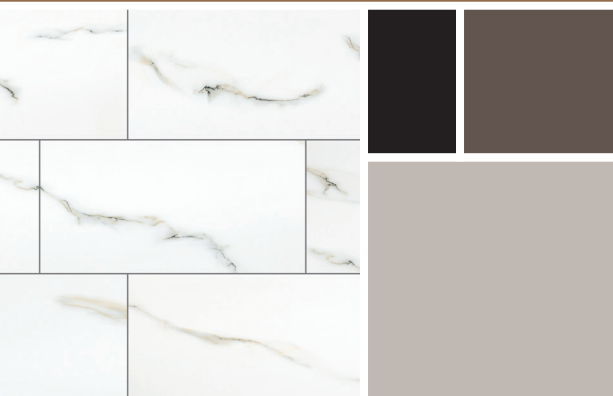

Aria

Porcelain Collection

www.msisurfaces.com

Colors



Bianco 24"x24"



Cremita 24"x24"



Ice 24"x24"



Oro 24"x24"

Size	Thickness	BIANCO	CREMITA	ICE	ORO
12x24	3/8"	NARIBIA1224P	NARICRE1224P	NARIICE1224P	NARIORO1224P
24x24	3/8"	NARIBIA2424P	NARICRE2424P	NARIICE2424P	NARIORO2424P
24x48	3/8"	NARIBIA2448P	NARICRE2448P	NARICE2448P	NARIORO2448P
2x4	3/8"	NARIBIA2X4P	NARICRE2X4P	NARICE2X4P	NARIORO2X4P
3x18	3/8"	NARIBIA3X18BNP	NARICRE3X18BNP	NARICE3X18BNP	NARIORO3X18BNP

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				III	V3	DCOF - < 0.42	> 275 lbf	< 0.5%	6
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

Classic and polished, the Aria collection captures the unique beauty of real stone in reliable porcelain. Inspired by natural stone from around the world, this charming series delivers incredible style in either a 12"x24" or 24"x24" and 24"x48", "2x4" mosaic and 3"x18" bullnose and a variety of looks. Choose from super white marble to rich caramel onyx to design the space of your dreams.

Technical Information

Primary Colors: Bianco, Cremita, Ice, Oro
Material Type: Glazed Porcelain
Finish: Polished
Polished: Hardness / Mohs 5
Matte: Hardness / Mohs 7

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Features At A Glance

- Available in 12x24, 24x24, 24x48, 2x4 Mosaic And a 3x18 Bullnose
- Competitively Priced Polished Tile
- High Definition Ink Jet Technology

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Trim



3" x 18" Bullnose

Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.

