


MSI

Making Dream Surfaces Attainable

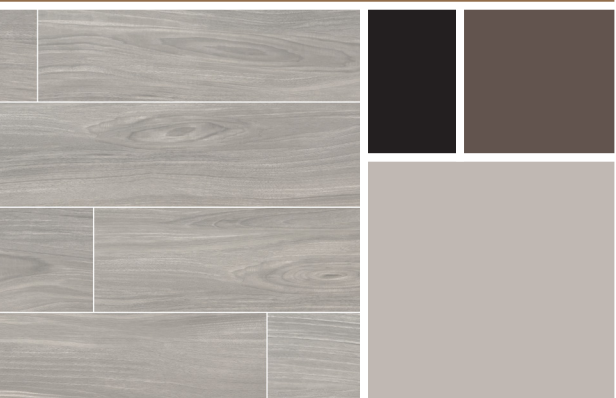

Braxton
Porcelain Collection

www.msisurfaces.com

Colors



Blanca 10"x40"



Grigia 10"x40"



Midnight 10"x40"



Saddle 10"x40"

Size	Thickness	BLANCA	GRIGIA	MIDNIGHT	SADDLE
10"x40"	3/8"	NBRABLA10X40	NBRAGRI10X40	NBRAMID10X40	NBRASAD10X40

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				IV	V3	DCOF - > 0.42 Wet	> 275 lbf	> 0.5%	7
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

Braxton Collection features subtle veins in soft white, creamy white, charcoal gray to dove gray hues set against a neutral background for an affordable luxury look. These 10"x40" large format wood-look planks create a soothing and relaxing mood, with minimal grout lines for seamless continuity. Use on floors, walls, or both and create a signature space that welcomes a wide variety of decorative schemes. Whether installed in a traditional pattern or eye-catching herringbone, these easy-maintenance, high-durability rectified tiles are perfect for busy homes and commercial spaces—indoors and outdoors.

Technical Information

Primary Colors: White, Beige, Gray
Material Type: Porcelain
Finish: Matte
Polished: Hardness / Mohs 5
Matte: Hardness / Mohs 7

Features At A Glance

- 4 different colors 10x40
- High quality Ink Jet technology
- Beautiful Contemporary wood plank look

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.