


# MSI

Making Dream Surfaces Attainable

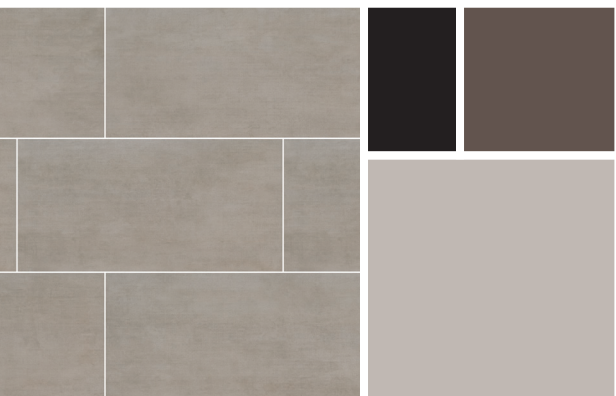

Gridscale  
Ceramic Collection

[www.msisurfaces.com](http://www.msisurfaces.com)

## Colors




Concrete 12"x24"



Graphite 12"x24"



Gris 12"x24"

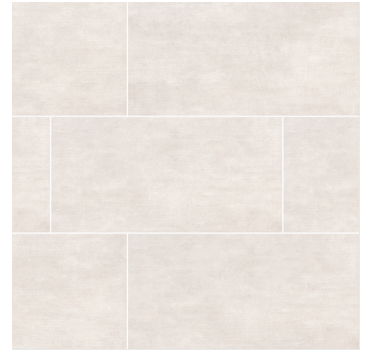

Ice 12"x24"

Size	Thickness	CONCRETE	GRAPHITE	GRIS	ICE
12x24	3/8"	NGRICON1224	NGRIGRA1224	NGRIDGRI1224	NGRICE1224
2x2	3/8"	NGRICON2X2	NGRIGRA2X2	NGRIDGRI2X2	NGRICE2X2
3x18	3/8"	NGRICON3X18BN-R	NGRIGRA3X18BN-R	NGRIDGRI3X18BN-R	NGRICE3X18BN-R

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Freeze/Thaw	Breaking Strength	Water Absorption	Hardness	Chemical Resistance
RESIDENTIAL	●	●	●	III	V4	DCOF -> 0.42	Not Resistant	< 250 lbf	< 3-6%	6	Resistant
LIGHT COMMERCIAL	●	●	●								
HEAVY COMMERCIAL											

Offering upscale concrete looks in a durable ceramic tile, MSI's Gridscale Collection is modern minimalism at its best. In four equally handsome hues all with a sophisticated matte finish, Gridscale is a cost-effective way to add a touch of urban-chic to your interior space. From bathroom shower walls and kitchen backsplash to bedroom floors and beyond, choose Gridscale 12x24" and 2x2" tiles to create a cohesive aesthetic throughout your space.

### Technical Information

Primary Colors: Beige, Gray, White

Material Type: Ceramic

Finish: Matte

Polished: Hardness / Mohs 5

Matte: Hardness / Mohs 7

### Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

### Disclaimer:

**Wet Cutting Instruction:** We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

\*No claims accepted after tile installation.

### Features At A Glance

- 4 different colors 12x24
- High quality Ink Jet technology

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

### Trim



3" x 18" Bullnose

