


MSI

Making Dream Surfaces Attainable

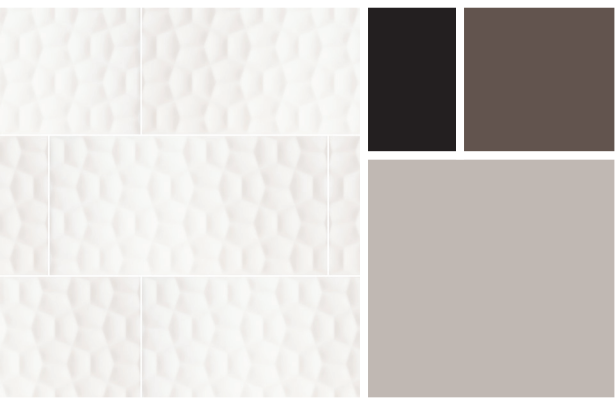

Adella
Porcelain & Ceramic
www.msisurfaces.com

Floor Tile Collection


Colors



Calacatta 18"x18"



Gris 18"x18"

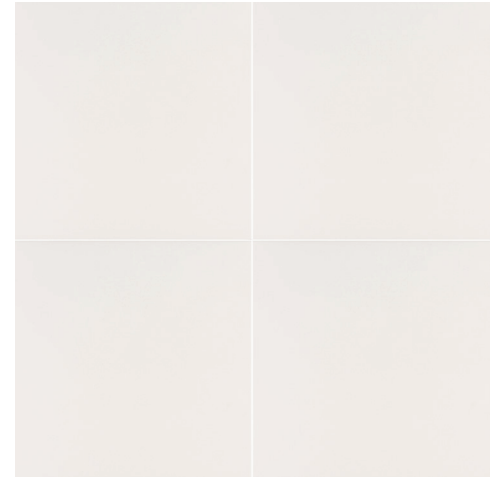

White 18"x18"

Size	Thickness	CALACATTA	GRIS	WHITE
18X18	3/8"	NADECAL1818	NADEGRI1818	NADEWHI1818

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	DCOF	Breaking Strength	Hardness
RESIDENTIAL	●	●	●	III	V2	DCOF - < 0.42 Wet	> 275 lbf	7
LIGHT COMMERCIAL	●	●	●					
HEAVY COMMERCIAL		●	●					

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

We have got your floors covered with the Adella line. Create a continuous stunning look by matching the walls with a sturdy 18"X18" porcelain floor tile.

Technical Information

Primary Colors: White, Gray
 Material Type: Glazed Porcelain
 Finish: Matte and Satin finish
 Polished: Hardness / Mohs 5
 Matte: Hardness / Mohs 7

Features At A Glance

- Three trendy designs in each of the three colors
- 18X18 Porcelain floor tile
- Ink Jet technology available

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.

Wall Tile Collection

Colors



Calacatta 12"x24"



Gris 12"x24"



White 12"x24"

Size	Thickness	CALACATTA	GRIS	WHITE
12X24 WALL	3/8"	NADECAL1224	NADEGRI1224	NADEWHI1224
12X24 WALL PATTERN	3/8"	NADEVISCAL1224	NADEVISGRI1224	NADEVISWHI1224

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	Water Absorption COF	Breaking Strength	Hardness
RESIDENTIAL			●	II	V2	N/A	< 275 lbf	4
LIGHT COMMERCIAL			●					
HEAVY COMMERCIAL			●					

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Non-Resistant	Resistant	Rectified	Glazed

We have got your walls covered with the Adella line. Spice up your walls or make them stick out with a 3D spiderweb pattern in one of the three different looks in the 12"X24" ceramic tiles. Create a continuous stunning look by matching the walls with a sturdy 18"X18" porcelain floor tile.

Technical Information

Primary Colors: White, Gray
Material Type: Ceramic
Finish: Matte and Satin finish

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Features At A Glance

- Three trendy designs in each of the three colors
- Two 12"X24" ceramic wall tiles
- Ink Jet technology available in 3D wall

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a un polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.

MSI

Making Dream Surfaces Attainable