

## MIXERS



### MIXERS

IPERBET .....	G2
IPERBET FLUID .....	G3

### FLUID MATERIALS MIXERS

FLUID MIX .....	G4
FLUID MIX SPECIAL .....	G4

### MIXERS


MX2: MIXER WITH TWO VARIABLE SPEEDS .....	G5
---	----

### BUCKETS AND MIXING PADDLES

ACCESSORIES, BUCKETS AND MIXING PADDLES .....	G6
---	----



Compact mixers, mixing paddles, the innovative mixers with two variable speeds: a complete range of products for mixing adhesives and grout for ceramic tiles as well as concrete, quartz plaster, cement, mortars, screeds, epoxy resins. Furthermore, a range of products specifically designed for mixing and setting of fluid mixtures such as self-leveling, premixed, paint, etc.





MIXERS

**OPTIONAL**



MASS BREAKER TOOL



FLUID MIXTURE TOOL

**TECHNICAL CHARACTERISTICS**



ROTATING BUCKET



45 L



LEGS WITH WHEELS



REDUCER



DOUBLE BLADE TOOL

**PACKAGE**



CARTON BOX

- For mixing tile adhesives, thinsets, mortar for plasters, quartz plasters, concrete and etc...
- Production capacity 300 Kg/h (50 lbs - 100 lbs).
- Mixing at low rpms does not entrap air and provides a homogenous mix.
- Fixed paddle, rotating bucket. This system provides a higher level of operator safety and allows the operator to check the mix quality while mixing.
- Gear ratio of motor to bucket 25 ÷ 1.
- Supplied with: two buckets (45 lt/12 gal), standard mixing blade, hex key, user and maintenance manual.

**MODEL SPECIFICATIONS**

Part No.								
<b>110</b>	8024648003331	1	230 V 50/60 Hz	Single-phase	0,5 HP/0,37 kW	1400/1680	55 / 66	45 lt   12 gal
<b>110 USA</b>	8024648014092	1	110 V 60 Hz	Single-phase	0,5 HP/0,37 kW	1680	66	45 lt   12 gal
<b>110 GB</b>	8024648005403	1	110 V 50 Hz	Single-phase	0,5 HP/0,37 kW	1400	55	45 lt   12 gal

**DIMENSIONS AND WEIGHT**

Model								
<b>IPERBET</b>	60x51xh 77 cm	23 5/8"x20"xh 30 1/4"	34 Kg	75 lbs	85x60xh 60 cm	33 1/2" x23 5/8" xh 23 5/8"	39 Kg	86 lbs





MIXERS

OPTIONAL



DOUBLE BLADE TOOL

TECHNICAL CHARACTERISTICS



ROTATING BUCKET



45 L



LEGS WITH WHEELS



REDUCER



FLUID MIXTURE TOOL

PACKAGE



CARTON BOX

- For mixing grout, tile adhesives and fluid material.
- Production capacity 300 Kg/h (50 lbs – 100 lbs)
- Mixing at low rpms does not entrap air and provides a homogenous mix.
- Paddle is comprised of: fixed blade to force the mixture toward the center and a rotating tool for lump-free consistency.

- Gear ratio of motor to bucket 25 ÷ 1.
- Supplied with: two buckets 45 lt (12 gal), paddle for fluid mixing, hex key, user and maintenance manual.

MODEL SPECIFICATIONS

Part No.								
<b>110 FLUID</b>	8024648011374	1	230 V 50/60 Hz	Single-phase	0,5 HP/0,37 kW	1400/1680	55 / 66	45 lt 12 gal
<b>110 FLUUS</b>	8024648014948	1	110 V 60 Hz	Single-phase	0,5 HP/0,37 kW	1680	66	45 lt 12 gal
<b>110 FLUGB</b>	8024648014955	1	110 V 50 Hz	Single-phase	0,5 HP/0,37 kW	1400	55	45 lt 12 gal

DIMENSIONS AND WEIGHT

Model								
<b>IPERBET FLUID</b>	60x51xh 77 cm	23 5/8"x20"xh 30 1/4"	35 Kg	77.2 lbs	85x60xh 60 cm	33 1/2"x23 5/8"xh 23 5/8"	40 Kg	88.2 lbs



# FLUID MIX - FLUID MIX SPECIAL



238 EUN  
FLUID MIX

238 UN  
FLUID MIX SPECIAL

**OPTIONAL**



MIXER

**TECHNICAL CHARACTERISTICS**



75 L



LEGS WITH WHEELS



238 HP01A  
(accessory for Fluid Mix Special)

**PACKAGE**



CARTON BOX

- For mixing fluid materials such as self-leveling, premixed, cement-based grout, paint and others.
- Perfect mixing, time for mixing cut off 50%, it eliminates fatigue for transporting the materials once mixed.
- Sturdy steel frame, rubber wheels, dust-free cap.
- Available in two versions:  
Art. 238 UN: 4 swivel wheels and inclinable bucket which allows to pour the mixture uniformly.  
Art. 238 EUN: 2 fixed wheels and two levers for pouring the mixture.

- Buckets (Art. 289LT75) capacity:  
75 liters (20 gal) of mixed material;  
75/100 Kg (34/45 lbs) of dry (still to be mixed) material.
- Universal attachment for drills/mixers from Ø 40 mm to Ø 60 mm (1 9/16" - 2 3/8").
- 3 spirals mixing-paddle (art.178389H); Ø 140 mm (5 1/2"); stem length: 680 mm (26 3/8"); screw attachment 14M.
- Equipped with: 1 bucket 75 liters (20 gal); 1 mixing-paddle, mixer not included.
- A conveyor for Fluid mix special bucket is available (Art. 238 CV01A).

**MODEL SPECIFICATIONS**

Part No.			Description		Screw attachment
<b>238 UN</b>	8024648061096	1	Fluid mix special - with paddle; without mixer	75 lt 20 gal	14 M
<b>238 EUN</b>	8024648061089	1	Fluid mix - with paddle; without mixer	75 lt 20 gal	14 M

**DIMENSIONS AND WEIGHT**

Model	Description				
<b>FLUID MIX SPECIAL</b>	Fluid mix special with paddle; without mixer	61x66xh 95cm 24"x26"xh 37 1/2"	28 Kg 61.7 lbs	85x60xh 70 cm 33 1/2"x23 5/8"xh 27 1/2"	29 Kg 63.9 lbs
<b>FLUID MIX</b>	Fluid mix with paddle; without mixer	54x60xh 77cm 21 1/4"x 23 1/2"xh 30 3/8"	17 Kg 37.5 lbs		18 Kg 39.7 lbs

**REPLACEMENT PARTS/ACCESSORIES**

Part No.			Description		
<b>238 HP01A</b>	8024648024299	1	Conveyor for Fluid mix special bucket	40x40x h 15 cm 15 3/4"x15 3/4"x h 6"	2,6 Kg 5.7 lbs
<b>289LT75</b>	8024648002495	1	Buckets: capacity 75 liters (20 gal)	-	-
<b>178389H</b>	8024648001603	1	3 spirals mixing-paddle; Ø140 mm (5 1/2"); attachment 14M	-	-



# MX2 - MIXERS WITH 2 VARIABLE SPEEDS 1400/1600 WATT




BOX

301W1400V2V  
301W1600V2V



## TECHNICAL CHARACTERISTICS



SCREW 14 MM CLUTCH

Ø 140 mm  
Ø 160 mm

SPEED SELECTOR

VARIABLE SPEED



- For mixing mortar, floor screed, plasters, cement, concrete, grout and adhesive for tiles, epoxy resins and so on...
- Two variable speeds: first speed 180-460 rpm.; second speed 300-700 rpm.
- Dual rotation speeds with electronic speed control.
- Double spiral mixing paddle included (Ø 140 mm version 1.400 Watt; Ø 160 mm version 1.600 Watt).
- Ergonomic design (included handles provided with rubber inserts for optimal grip).
- Button for permanent run.
- Externally accessible brushes for greater serviceability and longer motor life.
- Mixing paddle with screw clutch M14.
- Attractive self-explaining packaging.
- 3,5 m (11.5 ft) neoprene cable.

## MODEL SPECIFICATIONS

Part No.	Barcode	Box	Lightning Bolt	Motor	Mixing Paddle	Ø	Speed Selector	Variable Speed	Screw Clutch
<b>301W1400V2V</b>	8050532000902	1	230 V 50/60 Hz	1400W	180/460-300/700	140 mm - 5 1/2"	•	•	•
<b>301W1600V2V</b>	8024648017857	1	230 V 50/60 Hz	1600W	180/460-300/700	160 mm - 6 5/16"	•	•	•

## DIMENSIONS AND WEIGHT

Model	Height	Width	Weight	Volume	Depth	Weight	Volume	
<b>MX2 - 1400W</b>	46x29xh 35 cm	18"x11 13/32"xh 13 3/4"	4,6 Kg	10.1 lbs	60x30xh 33cm	23 5/8"x11 7/8"xh 13"	5,6 Kg	12.3 lbs
<b>MX2 - 1600W</b>								



# ACCESSORIES AND BUCKETS FOR IPERBET, IPERBET FLUID AND MIXERS



243



239KITC01A



239UF02D



239VG02A



289IPER



178 389L  
178 389F  
178 389G



178 389E



178 S



178



178D60



178D80



197180CM

197CF

PACKAGE



CARTON BOX

## ACCESSORIES FOR IPERBET, IPERBET FLUID AND MIXERS

Part No.	Barcode	Box	Description	IPERBET	IPERBET FLUID	Weight	Dimensions	Dimensions	Weight
243	8024648070968	3	Height-adjustable rake for self-leveling (without handle)			1,6 Kg 3.5 lbs	71x23xh 12 cm	28"x9"x h 4 1/2"	5,2 Kg 11.5 lbs
197CF	8024648000316	12	Anodized aluminum pole with hole - length 133 cm			420 gr 14.8 oz	140x25xh 10 cm	55"x10"x4"	5,5 Kg 12.1 lbs
197CM180	8024648000644	12	Anodized aluminum pole with hole - length 180 cm			540 gr 19 oz	180x25xh 25 cm	71"x10"x10"	7 Kg 15.4 lbs

## TOOLS

Part No.	Barcode	Box	Description	IPERBET	IPERBET FLUID	Weight	Dimensions	Dimensions	Weight
239KITC01A	8024648007094	1	Tool kit for mixing fluid	•	standard	2,9 Kg 6.4 lbs	58x30xh 25 cm	23"x12"xh 10"	3,4 Kg 7.5 lb
239UF02D	8024648011442	1	Double bladed tool	standard	•	2 Kg 4.4 lbs	35x40xh 10 cm	13 3/4"x15 3/4"xh 4"	2,3 Kg 5 lbs
239VG02A	8050532003774	1	Mass (clump) breaker	•	-	370 gr 13 oz	35x5xh 5 cm	13 3/4"x2"xh 2"	470 gr 16.6 oz

## BUCKETS

Part No.	Barcode	Box	Description	Capacity	IPERBET	IPERBET FLUID	Weight	Dimensions	Dimensions	Weight
289IPER	8024648000989	1	Bucket with handles	45 lt   12 gal	standard	standard	2,3 Kg 5 lbs	-	-	-

## MIXING PADDLES

- For mixing paints, thin set, grout, ready render, etc...
- Type of clutches: with profiled arm for quick-release screw arm 14M for screw-fit, hexagonal arm for blocking with chuck.
- Type of shape: reinforced double spiral, 4 shaped blades.
- Made of galvanized steel.

Part No.	Barcode	Box	Description	Clutch	Clutch	Clutch	Weight	Dimensions	Dimensions	Weight
178 389E	8024648009814	1	4 bladed mixing paddle Ø 140 mm (5 3/4")	-	•	-	-	-	-	-
178 389L	8024648079541	1	Double spiral mixing paddle Ø 160 mm (6 9/32")	-	•	-	-	-	-	-
178 389F	8024648017888	1	Double spiral mixing paddle Ø 140 mm (5 3/4")	-	•	-	-	-	-	-
178 389G	8024648017895	1	Double spiral mixing paddle Ø 120 mm (4 3/4")	-	•	-	-	-	-	-
178 S	8024648000392	10	Double spiral mixing paddle Ø 90 mm (3 1/2")	-	-	•	-	60x34xh 20 cm	23 5/8"x13 3/8"xh 8"	5,7 Kg 12.6 lbs
178	8024648000385	16	4 bladed mixing paddle Ø 120 mm (4 3/4")	-	-	•	-	-	-	7,7 Kg 17 lbs
178D60	8024648056887	12	Double spiral mixing paddle Ø60 mm (2 3/8")	-	-	•	-	44x15xh 14 cm	17 1/8"x6"xh 5 1/2"	2,8 Kg 6.2 lbs
178D80	8024648058195	12	Double spiral mixing paddle Ø80 mm (3 1/8")	-	-	•	-	44x19xh 18 cm	17 1/8"x7 1/2"xh 7"	3,1 Kg 6.8 lbs



## VIBRATORS AND ELECTRICAL BARS



### VIBRATORS WITH ROLLERS

MOLOSSO .....	H2
MASTINO AND TERRANOVA .....	H3

### VIBRATORS WITH PLATE

VOLPINO .....	H4
LUPETTO.....	H5


### ELECTRICAL BARS

SPRINTBETON .....	H6
-------------------	----



More than 40 years ago, the company's founder, Mirco Raimondi, prototyped the first tile-beater ("Lupetto") which became the first Raimondi product. From then on, Raimondi's tile-beaters are recognized as benchmark due to their effectiveness and reliability.

The 5 models still in the catalog are produced for the tiles installation with the traditional "mud-bed" method, to which we added "Volpino", specifically designed to ensure a full bound when large format tiles are laid with adhesive. In addition to that, the vibrating-screed "Sprintbeton", is a compact and lightweight solution for easy laying the mortar base.






MOLOSSO

VIBRATORS AND ELECTRICAL BARS

**TECHNICAL CHARACTERISTICS**



- Designed for laying tiles 60x60 cm (23 5/8" x 23 5/8") of 20 mm (3/4") thickness in mud bed, using the vibration method.
- Sturdy structure and 0,9 HP - 0,66 kW motor; net weight: 85 Kg (187 lbs).
- Five vibration intensities.
- Equipped with 36 rollers (9 rows of 4 rollers each) Ø 55 mm (2").

- Telescopic handle.
- The high vibration frequency enables perfect levelling of the tiles and ensures the full bond of the mud to the tile.
- Steel roller holder.

**MODEL SPECIFICATIONS**

Part No.				
<b>350R9 UE</b>	8024648093820	230 V 50/60 Hz	Single-phase	0,9 HP / 0,66 kW
<b>350R9 US</b>	8024648094094	110 V 60 Hz		0,9 HP / 0,66 kW
<b>350R9 GB</b>	8024648096029	110 V 50 Hz		0,9 HP / 0,66 kW

**DIMENSIONS AND WEIGHT**

Part No.				
<b>MOLOSSO</b>	1	85 Kg / 187.4 lbs	90x72x h 63 cm	35 1/2" x 28 1/8" x h 25"






MASTINO




TERRANOVA



MASTINO TECHNICAL CHARACTERISTICS



TERRANOVA TECHNICAL CHARACTERISTICS



PACKAGE



- For laying tiles in mud bed, using the vibration method.
- The high vibration frequency (10000 rounds/min.) enables perfect levelling of the tiles and ensures the full bond of the mud to the tile.
- Three vibration speeds:  
MASTINO: 5000/7000/10000 rounds/min;  
TERRANOVA: 4000/6500/8600 rounds/min.

- Telescopic handle.
- Roller: Terranova with 44 rollers (11 rows of 4 rollers each) Ø 40 mm (1 5/8"); Mastino with 36 rollers (9 rows of 4 rollers each) Ø 40 mm (1 5/8").
- Steel roller holder.
- Supplied with: transformer from 230/110 Volt to 42 Volt.

MASTINO MODEL SPECIFICATIONS

Part No.							
<b>349</b>	8024648004314	230/42 V 50/60 Hz	Single-phase	250 W	10000/12000	49x56 cm 19 1/4"x22"	•
<b>349 US</b>	8024648089670	110/42 V 60 Hz					•
<b>349 GB</b>	8024648009425	110/42 V 50 Hz					•

MASTINO DIMENSIONS AND WEIGHT

Part No.				
<b>MASTINO</b>	1	56,6 Kg 124.8 lbs	60x60xh 34 cm + 100x50xh 12 cm	23"x23"xh 13 1/2" + 40"x20"xh 5"
				59 Kg 130.1 lbs

TERRANOVA MODEL SPECIFICATIONS

Part No.							
<b>105</b>	8024648004321	230/42 V 50/60 Hz	Single-phase	200 W	8600/10300	47x52 cm 18 1/2"x20 1/2"	•
<b>105USA</b>	8024648009456	110/42 V 50/60 Hz					•

TERRANOVA DIMENSIONS AND WEIGHT

Part No.				
<b>TERRANOVA</b>	1	47 Kg 103.6 lbs	80x50xh 30 cm	31 1/2"x20"xh 11 7/8"
				49 Kg 108 lbs





321

**TECHNICAL CHARACTERISTICS**



41x21 cm

**PACKAGE**



CARTON BOX

- Designed to vibrate surface of large format tiles and help any air pocket escaping from underneath the slab, ensuring a full bond to the adhesive.
- Compact design, lightweight (6,7 Kg - 14.8 lbs) and easy to handle, it comes with 3 ergonomic handles which allow a comfortable and secure grip during both usages on floors and walls.
- The constant and uniformly applied vibration does not damage the slab even in the most risky situations (for instance, when large holes and/or cuts have been previously performed on the slab).

- High vibration frequency (motor Rpm: 3000 at 50 Hz; 3600 at 60 Hz).
- Vibration level can be adjusted via mechanical removal of eccentrics.
- Single speed.
- Stain-free-rubber plate designed to prevent stain and damage to the slab. Replaceable rectangular plate but with triangular point to easily reach the corners.
- Motor power: 25 Watt.

**MODEL SPECIFICATIONS**

Part No.								
<b>321 UE2</b>	8050532000391	230 V 50/60 Hz	Single-phase	25 W	3000 / 3600	41x21 cm 16"x8 1/4"	15	1
<b>321 US2</b>	8050532000407	110 V 60 Hz			3600		-	-
<b>321 GB2</b>	8050532000414	110 V 50 Hz			3000		-	-

**DIMENSIONS AND WEIGHT**

Part No.						
<b>VOLPINO</b>	1	6,7 Kg	14.8 lbs	58x30xh 25cm	23"x12"xh 10"	7,2 Kg 15.9 lbs

**ACCESSORIES**


Part No.			Description					
<b>321LA03A</b>	8024648099815	1	Stain-free rubber plate (spare part)	1,4 Kg	3.1 lbs	41x21 cm 16"x8 1/4"	2,3 Kg	5.1 lbs



VIBRATORS AND ELECTRICAL BARS



LUPETTO

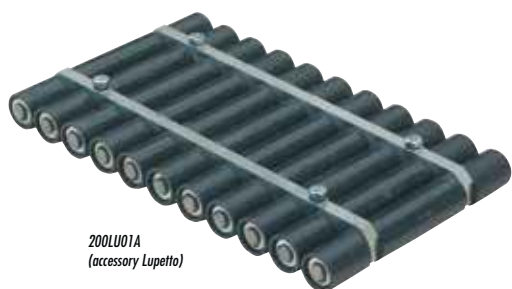

200LU01A  
(accessory Lupetto)

TECHNICAL CHARACTERISTICS



150 W



25x45 cm



SPEED SELECTOR

OPTIONAL



33 ROLLERS

PACKAGE



CARTON BOX

- For laying tiles in mud bed, using the vibration method.
- The high vibration frequency (8200 rounds/min.) enables the perfect levelling of the tiles and ensures the full bond of the mud to the tile.
- Ergonomic handle.

- Two vibration speeds: 6000/8200 rounds/min.
- Rectangular interchangeable plastic plate.
- Supplied with: transformer from 230/110 Volt to 42 Vol.

MODEL SPECIFICATIONS

Part No.	Barcode	Transformer	Motor	Rollers	Plate	Speed Selector	Rollers
<b>116CC EU</b>	8024648084668	230/42 V 50/60 Hz	Single-phase	90 W	25x45 cm 10"x17 3/4"	6000	•
<b>116CC US</b>	8024648084675	110/42 V 60 Hz				8200	•
<b>116CC GB</b>	8024648086709	110/42 V 50 Hz				9800	•
						8200	•

DIMENSIONS AND WEIGHT


Part No.	Box Qty	Weight (Kg)	Weight (lbs)	Dimensions (cm)	Dimensions (in)	Weight (Kg)	Weight (lbs)
<b>LUPETTO</b>	1	11,2 Kg	24.6 lbs	60x30x25 cm	23 5/8"x11 7/8"x10"	11,8 Kg	26 lbs

ACCESSORIES

Part No.	Barcode	Box Qty	Description	Weight (Kg)	Weight (lbs)	Dimensions (cm)	Dimensions (in)	Weight (Kg)	Weight (lbs)
<b>200LU01A</b>	8024648014467	1	Complete rollers kit (spare part)	13 Kg	28.6 lbs	25x45 cm	10"x17 3/4"	14 Kg	30.8 lbs



# SPRINTBETON

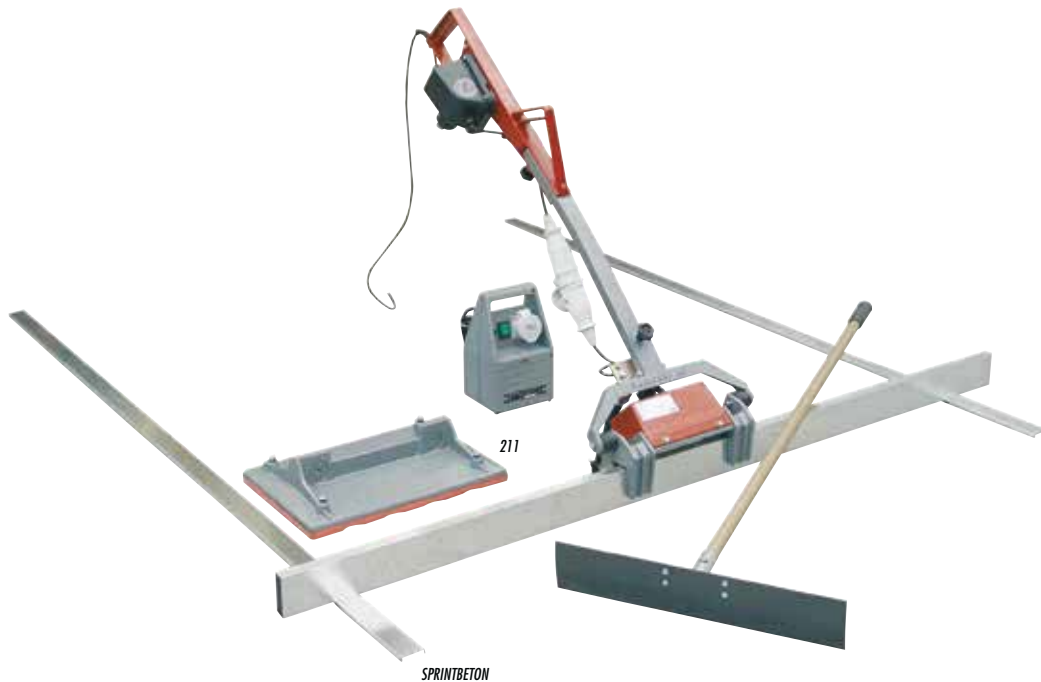

SPRINTBETON

## OPTIONAL



VIBRATING SURFACE

## TECHNICAL CHARACTERISTICS



150 W



SPEED SELECTOR

## PACKAGE



CARTON BOX

- For screeding mortar base and vibrating of tiles into mud beds.
- The screed bar can be replaced with an optional roller assembly to vibrate tiles into the mud bed.
- Low voltage motor assembly: 42 Volt.

- Supplied with: two aluminum bars 180 cm and 210 cm (70 7/8" and 82 5/8"), two steel shims 200 cm (78 3/4"), single mortarspreader 50 cm long (20"), transformer from 230/110 Volt to 42 Volt.

## MODEL SPECIFICATIONS

Part No.	Barcode	Box	Motor	Phase	Power	Speed	Bar	Weight	Dimensions	Weight
<b>104CC EU</b>	8024648084521	1	230/42 V 50/60 Hz	Single-phase	90 W	8200	180 - 210 cm 70 7/8" - 82 5/8"	25,6 Kg 56.4 lbs	62x42xh 36 cm + 210x10xh 10 cm 24"x16"xh 14" + 82"x4"xh 4"	27,7 Kg 61.1 lbs
<b>104CC US</b>	8024648084613	1	110/42 V 50/60 Hz							

## ALUMINUM BARS

Part No.	Barcode	Box	Bar	Dimensions	Weight
<b>146ST01D</b>	8024648013774	1	180 cm 70 7/8"	180x8xh 3 cm 70 7/8"x3 1/8"xh 1 3/16"	2,3 Kg 5.1 lbs
<b>146ST02D</b>	8024648013781	1	210 cm 82 5/8"	210x8xh 3 cm 82 5/8"x3 1/8"xh 1 3/16"	2,7 Kg 6 lbs
<b>146ST03D</b>	8024648013798	1	250 cm 98 1/2"	250x8xh 3 cm 98 1/2"x3 1/8"xh 1 3/16"	3,2 Kg 7.1 lbs
<b>146ST04D</b>	8024648013804	1	300 cm 118"	300x8xh 5 cm 118"x3 1/8"xh 1 3/16"	3,8 Kg 8.4 lbs

## ACCESSORIES

Part No.	Barcode	Box	Description	Dimensions	Weight
<b>145</b>	8024648004840	1	Steel shim 200 cm (78 3/4")	200x8xh 3 cm 78 3/4"x3 1/8"xh 1 3/16"	1 Kg 2.2 lbs
<b>211</b>	8024648013767	1	Complete vibrating plate 30x45 cm (11 7/8"x17 3/4")	58x30xh 25 cm 23"x11 7/8"xh 10"	5,9 Kg 13 lbs



VIBRATORS AND ELECTRICAL BARS