

# VersaRUBBER<sup>®</sup>

**Description & Application:** A smooth vulcanized rubber finish floor, VersaRUBBER is tailored for various applications, from hockey arenas and fitness facilities to schools and commercial spaces, it seamlessly merges durability with comfort. Crafted with precision, VersaRUBBER is engineered to enhance performance while reducing the risk of injuries. Whether adhered or loose laid, its adaptability shines through, making it an ideal choice for diverse environments. Pliteq Flooring's commitment to quality is evident in VersaRUBBER's design, ensuring safety, comfort, and style across all market segments.

## TECHNICAL SPECIFICATIONS

	ASTM	3/8" - 1/2" (10-12mm)
Shore A Hardness	D2240	>75 (±5)
Wear Layer Thickness	F410	>0.050 (Pass)
Static Load Resistance	F970	0.002 (Pass)
Resistance to Chemicals	F925	Good
Resistance to Heat	F1514	4.29 (pass)
Abrasion Resistance	D3389	0.17g, 300 cycles
Wear Index	D3389	0.572
Dimensional Stability	F2199	0.12 (Pass)
Critical Radiant Flux	E648-03	Class II
Tear	D624	119.57 lbf/in
Moisture Absorption	D570	0.27%
Coefficient of Friction	C1028	>0.80 Wet >0.64 Dry
Qualifies for LEED Points		Yes
Anti-Microbial		Yes
Anti-Fungal		Yes

## PHYSICAL SPECIFICATIONS

FORMAT	SHEET
DIMENSIONS	4' x 6' (1.2 m x 1.8 m)
THICKNESS	3/8" (10 mm), 1/2" (12 mm)
SF/UNIT	24 SF (2.2 m <sup>2</sup> )

## COLOR OPTIONS



1401 VEX BLACK



1402 VENOM GREY




1403 VIVID BLUE



1404 VINO RED



1405 VAPOR BEIGE

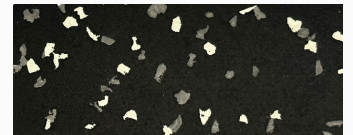

1406 VICTORY WHITE

Additional Colors available. MOQ may apply.

**Warranty:** Pliteq Flooring warrants that VersaRUBBER, when installed according to its recommended procedures and adhesives, will be free from manufacturing defects. For more information, please review the Limited Lifetime Warranty document or contact your local Pliteq representative.



1-888-491-6549



info@pliteqflooring.com



www.pliteqflooring.com