


MSI

Making Dream Surfaces Attainable

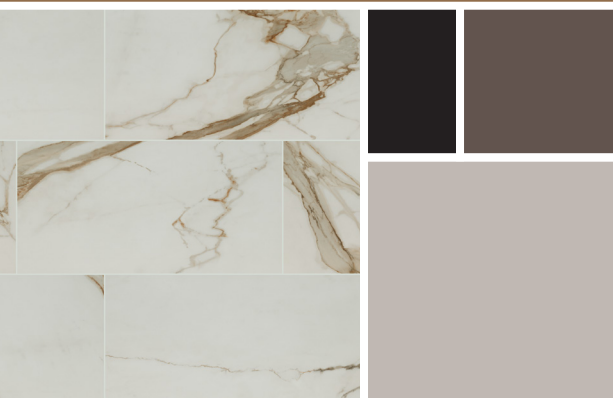


Regallo
Porcelain Collection
www.msisurfaces.com


Colors



Calacatta Isla

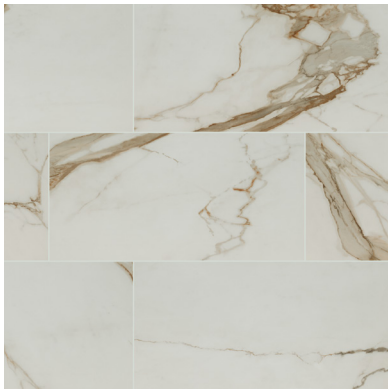

Calacatta Marbella

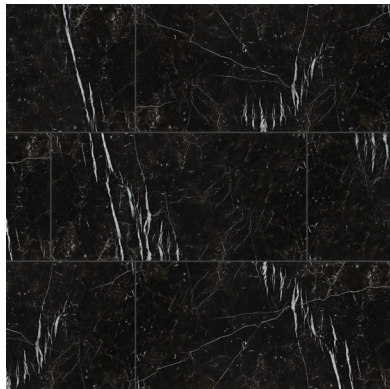

Marquina Noir

Size	Thickness	CALACATTA ISLA	CALACATTA MARBELLA	MARQUINA NOIR
12x24 Matte	3/8"	NREGCALISL1224	NREGCALMAR1224	NREGMARNOI1224
12x24 Polished	3/8"	NREGCALISL1224P	NREGCALMAR1224P	NREGMARNOI1224P
24x24 Matte	3/8"	NREGCALISL2424	NREGCALMAR2424	NREGMARNOI2424
24x24 Polished	3/8"	NREGCALISL2424P	NREGCALMAR2424P	NREGMARNOI2424P
24x48 Matte	3/8"	NREGCALISL2448	NREGCALMAR2448	NREGMARNOI2448
24x48 Polished	3/8"	NREGCALISL2448P	NREGCALMAR2448P	NREGMARNOI2448P
2x2 Matte	3/8"	NREGCALISL2X2	NREGCALMAR2X2	NREGMARNOI2X2
3x24 Polished	3/8"	NREGCALISL3X24BNP	NREGCALMAR3X24BNP	NREGMARNOI3X24BNP
3x24 Matte	3/8"	NREGCALISL3X24BN	NREGCALMAR3X24BN	NREGMARNOI3X24BN

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	DCOF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				IV	V3	Polished < 0.42 Matte > 0.42	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

Elegant and classic, yet simultaneously modern, the Regallo Collection offers the beauty of natural marble with the solid performance of porcelain. Whether your style is traditional or contemporary, these tiles are a sophisticated addition to a kitchen, bathroom, living room, entryway, and more. Available in 12" x 24", 24" x 24", and 24"x 48" mosaic with bullnose accessories and colors ranging from cool white to bold black, the tiles complement a range of design styles.

Technical Information

Primary Colors: White, Black
Material Type: Porcelain
Finish: Matt & Polished

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.
Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.
Variation in shade is an inherent attribute of porcelain tile.
To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade.
Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.
*No claims accepted after tile installation.

Features At A Glance

- Available in Matte and Polished finish
- Create stunning floors, feature walls, and fireplace walls, while also the perfect choice for facades, facings, and other outdoor feature

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

