


# MSI

Making Dream Surfaces Attainable

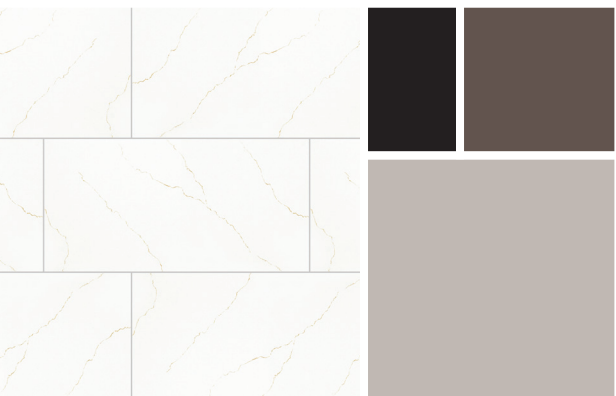

Miraggio  
Porcelain Collection  
[www.msisurfaces.com](http://www.msisurfaces.com)

## Colors



Gold



Gray

Size	Thickness	MIRAGGIO GOLD	MIRAGGIO GRAY
2x2	3/8"	NMIRGOL2X2HEX	NMIRGRA2X2HEX
12x24 Matte	3/8"	NMIRGOL1224	NMIRGRA1224
12x24 Polished	3/8"	NMIRGOL1224P	NMIRGRA1224P
24x24 Matte	3/8"	LPAVNMIRGOL2424	LPAVNMIRGRA2424
24x48 Matte	3/8"	NMIRGOL244	NMIRGRA2448
24x48 Polished	3/8"	NMIRGOL2448P	NMIRGRA2448P
3x24 Bull Nose	3/8"	NMIRGOL3X24BN	NMIRGRA3X24BN

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	DCOF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	III	V2	DCOF > 0.42 Matte DCOF < 0.42 Polished	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL		●	●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Pressed	Glazed

The Miraggio collection features porcelain tile that closely resembles that of quartz stone with a cool white background and multiple vein color options available. Available in multiple shapes and sizes including 12"x24" and 24"x28", apply this tile to a variety of residential and commercial environments. It's also the perfect complement to add as a stylish backsplash, countertop or accent wall. Consider the Miraggio collection for its beauty, strength and overall durability when building a new space.

### Technical Information

Primary Colors: White-Cool, White-Warm

Material Type: Glazed Porcelain

Finish: Matte, Polished

Polished: Hardness / Mohs 5

Matte: Hardness / Mohs 7

### Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

### Features At A Glance

- Comes in multiple shapes and sizes including 12x24 and 24x48 sizes
- Both matte and polished finishes available
- Durable and versatile porcelain to any decor style to help make your interiors and exteriors stand out.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



### Disclaimer:

**Wet Cutting Instruction:** We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade.

Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

\*No claims accepted after tile installation.