

O.R.C.A.®

ORGANIC RIGID COREBOARD ANTISTATIC

MOISTURE DEFENSE TECHNOLOGY



30
★★★

WARRANTY
(RESIDENTIAL)



**ORGANIC PVC-FREE
HYBRID LAMINATE FOR
DIMENSIONAL STABILITY**



**1CLIC 2GO PURE
LOCKING SYSTEM**



**ANTI BACTERIAL
COMFORT**



**ANTI-FADE
LIGHT RESISTANCE**



**MICRO SCRATCH
AC5**



PET PROOF



ANTI-STATIC



V-BEVEL

Installation Quick Guide:

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimation: 48 hours unopened carton
- Recommended Room Temp: 59°F - 86°F after install
- Ambient RH: 40%-70%
- Expansion Space: 1/2"-3/5" gap
- No transitions required in rooms under 2,500 sf

Read Complete Instructions Before Installing



www.blauer-engel.de/LUT15

EXPERIENCE BY PCS Global Services



BIOMYLPRO By kronospan

IN PARTNERSHIP WITH **TA supply company, inc.**




KS12PORK415
Aeolus Oak



KS12POR1538
Alamos Oak




KS12POR1539
Clayborn Oak

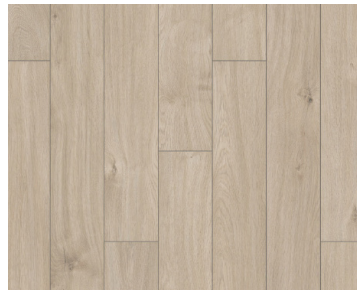


KS12PORK337
Hayloft Oak



KS12PORK418
Longbow Oak

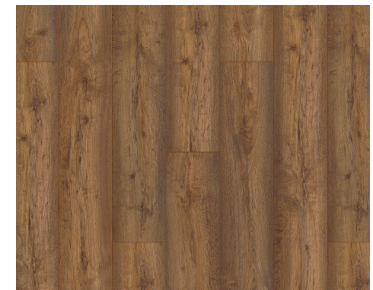

KS12POR8274
Modena Oak

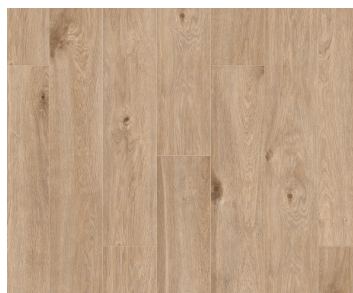

KS12POR1536
Stockholm Oak



KS12POR8837
New England Oak

SPECIFICATIONS

Dimensions (nominal): 7-1/2" width x 50-1/2" length x 13mm thick overall

Construction: Organic Water Resistant Hybrid Laminate; 12mm core plus 1mm pad attached

Wear Surface Rating: AC5

Texture: Embossed

Edge Profile: 4-Sided V Bevel

Installation: Click, 1CLIC 2GO Pure

Warranty: 30 Year Residential, 5 Year Commercial

Water Protection: 100 Hour Surface Water Protection Guarantee

Packaging: 13.28 sf/ctn, 40 ctn/plt, 531.2 sf/plt

Additional Specifications, Full Installation Instructions & Warranty Information Available at www.tasupply.com

OMCUSELAWR22.1 | ORCA_MAY 2022_R1