















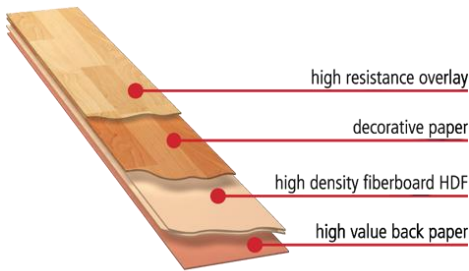


AUTHENTIC COLLECTION / ADVANCED SELECTION

WOOD GRAIN FINISH 8mm AC4

Menznau, September 1, 2013 | Version 1.0 (supersedes all previously published data)

<p>Characteristics</p>	<p>Attractive: Available in many, authentic, modern colour tones from light to dark and various individual, distinguished planks. A floor of timeless beauty to enrich any place.</p> <p>Innovative: Looks and feels like a precious hardwood floor. Produced with the latest technology.</p> <p>Healthy: Produced according to European standards. For a healthy living, emissions of vapours are the same as you would expect from wood in its natural state.</p> <p>Ecological: wood from local sources – produced at the most modern, environmental friendly production facility of its kind.</p> <p>Resilient: High abrasion (cl. AC4/32),</p> <p>Affordable: Unbeatable price/performance ratio compared to traditional hardwood floors: You not only save initially when buying the floor but again later on in both money and time. It is a low maintenance and easy to care flooring. There is no need to wax, polish nor sanding it, and it stays looking like the day you laid it for years and years.</p>																																									
<p>Technical classification</p>	<p>Laminate floor covering according to EN 13329 High Density Fibreboard (HDF) Declaration of Performance (EN 14041):</p> <p>http://www.kronotex.com/cms/Telechargements/0203303444.html</p>	 KCH_LFa_002																																								
<p>Use</p>	<p>Floor-Covering inside buildings</p> <table border="1" style="width: 100%; text-align: center;"> <thead> <tr> <th colspan="4"></th> <th colspan="3">Levels of use</th> </tr> <tr> <th colspan="2"></th> <th>Moderate</th> <th>General</th> <th colspan="3">Heavy</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Domestic</td> <td></td> <td></td> <td></td> <td colspan="3"></td> </tr> <tr> <td>AC 1 / Cl. 21 Bed-, guestrooms</td> <td>AC 2 / Cl. 22 Living-, dining rooms</td> <td>AC 3 / Cl. 23 Kitchen, entrance halls</td> <td colspan="3"></td> </tr> <tr> <td rowspan="2">Commercial</td> <td></td> <td></td> <td colspan="4"></td> </tr> <tr> <td>AC 3 / Cl. 31 Hotel rooms, small offices</td> <td>AC 4 / Cl. 32 Offices, boutiques</td> <td colspan="4"></td> </tr> </tbody> </table>						Levels of use					Moderate	General	Heavy			Domestic							AC 1 / Cl. 21 Bed-, guestrooms	AC 2 / Cl. 22 Living-, dining rooms	AC 3 / Cl. 23 Kitchen, entrance halls				Commercial							AC 3 / Cl. 31 Hotel rooms, small offices	AC 4 / Cl. 32 Offices, boutiques				
				Levels of use																																						
		Moderate	General	Heavy																																						
Domestic																																										
	AC 1 / Cl. 21 Bed-, guestrooms	AC 2 / Cl. 22 Living-, dining rooms	AC 3 / Cl. 23 Kitchen, entrance halls																																							
Commercial																																										
	AC 3 / Cl. 31 Hotel rooms, small offices	AC 4 / Cl. 32 Offices, boutiques																																								
<p>Product structure</p>																																										

Product range and technical specifications

Product specifications

Size per board: 1380 x 193 x 8mm | 54x 7 5/8" x 5/16"
 1 Box contains: 8 boards in total 2.04m² and 14.547kg | 22.94 sqft / 32 lbs
 Characteristics: 4-sided V-Groove , 5G- drop lock Installation

Technical specifications

Characteristic	Symbol	Value	Standard
Thickness of the element, <i>t</i>	$\Delta t_{average}$ $t_{max} - t_{min}$	$\leq 0,50$ mm $\leq 0,50$ mm	EN 13329
Length of the surface layer, <i>l</i>	Δl	$\leq 0,50$ mm	EN 13329
Width of the surface layer, <i>w</i>	$\Delta w_{average}$ $w_{max.} - w_{min.}$	$\leq 0,10$ mm $\leq 0,20$ mm	EN 13329
Squareness of the element, <i>q</i>	$q_{max.}$	$\leq 0,20$ mm	EN 13329
Straightness of the surface layer, <i>s</i>	$s_{max.}$	$\leq 0,30$ mm/m	EN 13329
Flatness of the element, <i>f</i> Maximum single values	$f_{w, concave}$ $f_{w, convex}$ $f_{l, concave}$ $f_{l, convex}$	$\leq 0,15$ % $\leq 0,20$ % $\leq 0,50$ % $\leq 1,00$ %	EN 13329
Openings between elements, <i>o</i>	$o_{average}$ $o_{max.}$	$\leq 0,15$ mm $\leq 0,20$ mm	EN 13329
Height difference between elements, <i>h</i>	$h_{average}$ $h_{max.}$	$\leq 0,10$ mm $\leq 0,15$ mm	EN 13329
Dimensional variations after changes in relative humidity	$\delta l_{average}$ $\delta w_{average}$	$\leq 0,9$ mm $\leq 0,9$ mm	EN 13329
Light fastness	Blue wool scale Grey scale	> 6 > 4	EN ISO 105-B02 EN ISO 20105-A02
Static indentation		No visible change	EN 433
Surface soundness		≥ 1.5 N/mm ²	EN 13329
Abrasion resistance		AC 4, IP ≥ 4000 revolutions	EN 13329
Impact Resistance		IC 2	EN 13329
Resistance to staining		Class 5	EN 438
Effect of a furniture leg		Foot type 0: no damage	EN 424
Effect of a castor chair		25'000 cycles – no damage	EN 425
Thickness swelling		≤ 18 %	EN 13329
Reaction to Fire		Cfl-s1	EN 13501-1
Volatile Organic Compounds (VOC)		TVOC < 1000 μ g	ISO 16000
Static electrical propensity		≤ 2 kV	EN 1815
Formaldehyde Emissions		< 0.1 ppm (E1) in application < 0.02 ppm	EN 717-1
Thermal Resistance		0.089 (m ² K)/W	EN 12667
Slip resistance		DS	EN 14041
Ecology information acc. to SIA Product declaration SIA 493		Renewable energy > 90 % wood fibre ~ 80 % UF adhesive ~ 15 % Swiss wood no post-consumer recycled content no chlorides no biocides in the wood heavy metal free coating	SIA 493.05
Disposal		thermally recyclable	

