

AMAYA WOOD HD PORCELAIN TILE



AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD TOBACCO HD PORCELAIN TILE

AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD WALNUT HD PORCELAIN TILE

AMAYA WOOD HD PORCELAIN TILE



8" x 48" AMAYA WOOD TOBACCO HD PORCELAIN TILE
62-900



6" x 36" AMAYA WOOD TOBACCO HD PORCELAIN TILE
62-732



6" x 24" AMAYA WOOD TOBACCO HD PORCELAIN TILE
62-533



8" x 48" AMAYA WOOD WALNUT HD PORCELAIN TILE
62-901



6" x 36" AMAYA WOOD WALNUT HD PORCELAIN TILE
62-733



6" x 24" AMAYA WOOD WALNUT HD PORCELAIN TILE
62-534

AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD BLEND HD PORCELAIN TILE

AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD NATURAL HD PORCELAIN TILE

AMAYA WOOD HD PORCELAIN TILE




8" x 48" AMAYA WOOD BLEND HD PORCELAIN TILE
62-902



6" x 36" AMAYA WOOD BLEND HD PORCELAIN TILE
62-734



6" x 24" AMAYA WOOD BLEND HD PORCELAIN TILE
62-535

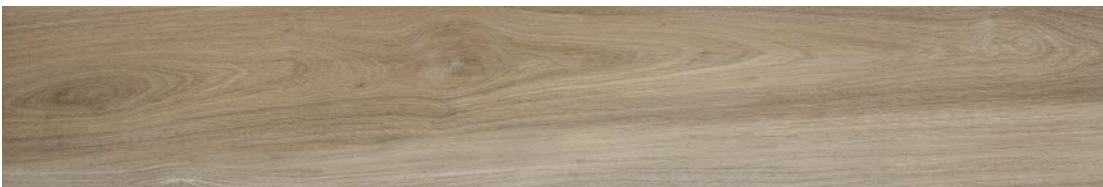

8" x 48" AMAYA WOOD NATURAL HD PORCELAIN TILE
62-903



6" x 36" AMAYA WOOD NATURAL HD PORCELAIN TILE
62-903



6" x 24" AMAYA WOOD NATURAL HD PORCELAIN TILE
62-536

AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD ASH HD PORCELAIN TILE

AMAYA WOOD HD PORCELAIN TILE



8" x 48" AMAYA WOOD ASH HD PORCELAIN TILE
62-904



6" x 36" AMAYA WOOD ASH HD PORCELAIN TILE
62-736



6" x 24" AMAYA WOOD ASH HD PORCELAIN TILE
62-537

AMAYA WOOD HD PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	ITEM CODE					LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
	TOBACCO	WALNUT	BLEND	NATURAL	ASH					
8" x 48" AMAYA WOOD HD PORCELAIN TILE	62-900	62-901	62-902	62-903	62-904	60.5	5	12.9	33	426
6" x 36" AMAYA WOOD HD PORCELAIN TILE	62-732	62-733	62-734	62-735	62-736	45.74	8	12	39	468
6" x 24" AMAYA WOOD HD PORCELAIN TILE	62-533	62-534	62-535	62-536	62-537	54.64	14	14	40	560

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	6" x 24"	6" x 36"	8" x 48"
THICKNESS		mm - in	9 mm - 11/32"	9 mm - 11/32"	10 mm - 3/8"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5	≤ 0.5	≤ 0.5
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4	4	4
SCRATCH HARDNESS		(Mohs)	7	7	7
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 300	≥ 300	≥ 330
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A - Res.	Class A - Res.	Class A - Res.
FROST RESISTANCE	EN ISO 10545-12		Resistant	Resistant	Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.60	≥ 0.60	≥ 0.60
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.60	≥ 0.60	≥ 0.60
DCOF (WET)	ANSI B101.3		≥ 0.50	≥ 0.50	≥ 0.50
SHADE VARIATION			V4	V4	V4