

CABIN HD PORCELAIN TILE



CABIN HD PORCELAIN TILE



6" x 36" CABIN PAPER BIRCH HD RECTIFIED PORCELAIN TILE

CABIN HD PORCELAIN TILE



8' x 48' CABIN PAPER BIRCH HD RECTIFIED PORCELAIN TILE
62-905



6' x 36' CABIN PAPER BIRCH HD RECTIFIED PORCELAIN TILE
62-741



8' x 48' CABIN FRENCH OAK HD RECTIFIED PORCELAIN TILE
62-906



6' x 36' CABIN FRENCH OAK HD RECTIFIED PORCELAIN TILE
62-742

CABIN HD PORCELAIN TILE



6" x 36" CABIN SANDALWOOD HD RECTIFIED PORCELAIN TILE


CABIN HD PORCELAIN TILE



8' x 48' CABIN SANDALWOOD HD RECTIFIED PORCELAIN TILE
62-907



6' x 36' CABIN SANDALWOOD HD RECTIFIED PORCELAIN TILE
62-743

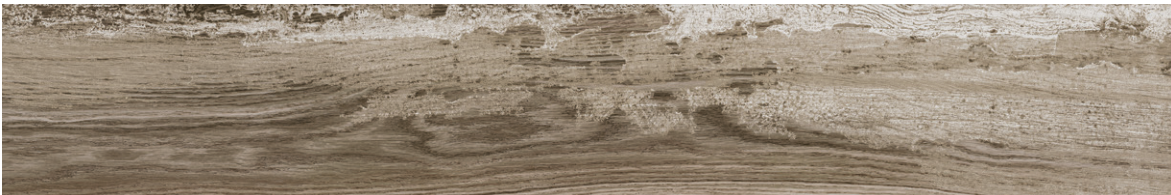

8' x 48' CABIN CYPRESS HD RECTIFIED PORCELAIN TILE
62-908



6' x 36' CABIN CYPRESS HD RECTIFIED PORCELAIN TILE
62-744

CABIN HD PORCELAIN TILE



6" x 36" CABIN CYPRESS HD RECTIFIED PORCELAIN TILE

CABIN PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	ITEM CODE	LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
8" x 48" CABIN PAPER BIRCH HD RECTIFIED PORCELAIN TILE	62-905	60.64	4	10.33	39	402.99
6" x 36" CABIN PAPER BIRCH HD RECTIFIED PORCELAIN TILE	62-741	49.16	8	11.63	36	418.50
8" x 48" CABIN FRENCH OAK HD RECTIFIED PORCELAIN TILE	62-906	61.73	4	10.33	39	402.99
6" x 36" CABIN FRENCH OAK HD RECTIFIED PORCELAIN TILE	62-742	50.70	8	11.63	36	418.50
8" x 48" CABIN SANDALWOOD HD RECTIFIED PORCELAIN TILE	62-907	59.92	4	10.33	39	402.99
6" x 36" CABIN SANDALWOOD HD RECTIFIED PORCELAIN TILE	62-743	49.53	8	11.63	36	418.50
8" x 48" CABIN CYPRESS HD RECTIFIED PORCELAIN TILE	62-908	60.69	4	10.33	39	402.99
6" x 36" CABIN CYPRESS HD RECTIFIED PORCELAIN TILE	62-744	49.19	8	11.63	36	418.50

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	6" x 36"	8" x 48"
THICKNESS		mm – in	9 mm – 11/32"	12 mm – 15/32"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5	≤ 0.5
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4	4
SCRATCH HARDNESS		(Mohs)	7	7
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 300	≥ 480
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Resistant	Class A – Resistant
FROST RESISTANCE	EN ISO 10545-12		Resistant	Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.50	≥ 0.50
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.70	≥ 0.70
DCOF (WET)	ANSI B101.3		≥ 0.42	≥ 0.42
SHADE VARIATION			V3	V3



8" x 48" CABIN SANDALWOOD HD RECTIFIED PORCELAIN TILE