

MUSKOKA HD PORCELAIN TILE



MUSKOKA HD PORCELAIN TILE



6" x 36" MUSKOKA ASH HD PORCELAIN TILE

MUSKOKA HD PORCELAIN TILE



6" x 36" MUSKOKA SMOKE HD PORCELAIN TILE

MUSKOKA HD PORCELAIN TILE




6" x 36" MUSKOKA SADDLE HD PORCELAIN TILE

MUSKOKA HD PORCELAIN TILE



6" x 36" MUSKOKA CHARRED HD PORCELAIN TILE

MUSKOKA HD PORCELAIN TILE

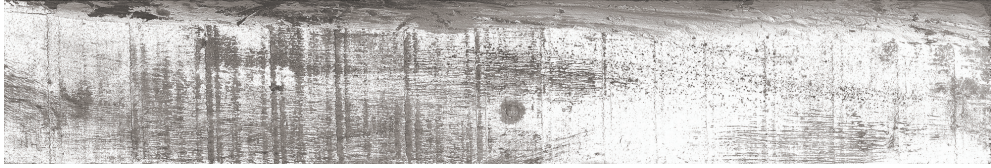

6" x 36" MUSKOKA ASH HD PORCELAIN TILE
4500-0446-0



6" x 36" MUSKOKA SMOKE HD PORCELAIN TILE
4500-0449-0



6" x 36" MUSKOKA SADDLE HD PORCELAIN TILE
4500-0448-0



6" x 36" MUSKOKA CHARRED HD PORCELAIN TILE
4500-0447-0

MUSKOKA HD PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
6" x 36" MUSKOKA HD PORCELAIN TILE	46.87	7	10.22	56	572.43

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	6" x 36"
THICKNESS		mm – in	9.8 mm – 3/8"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4
SCRATCH HARDNESS		(Mohs)	7
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 300
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Resistant
FROST RESISTANCE	EN ISO 10545-12		Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.70
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.80
DCOF (WET)	ANSI B101.3		≥ 0.50
SHADE VARIATION			V3