


# WALL AND COUNTERTOP PROFILES



**INNOVATIVE SOLUTIONS FOR CERAMIC AND STONE TILE**


**FINISHING AND EDGE PROTECTION**



2.3 Schluter®-JOLLY




2.12 Schluter®-INDEC



2.5 Schluter®-RONDEC-DB




2.3 Schluter®-JOLLY-P




16.2 Schluter®-DESIGNBASE-SL




2.11 Schluter®-QUADec-FS



2.10 Schluter®-QUADec




2.17 Schluter®-FINEC/-SQ




2.2 Schluter®-DESIGNLINE




2.1 Schluter®-RONDEC




2.6 Schluter®-ECK-E





2.8 Schluter®-RONDEC-STEP




2.14 Schluter®-DECO-DE




2.7 Schluter®-ECK-K




2.9 Schluter®-RONDEC-CT



1.9 Schluter®-DECO-SG/-SGC



2.7 Schluter®-ECK-KI/-KHK




2.11 Schluter®-SCHIENE-STEP


Ceramic and stone tiles are durable, hygienic, heat resistant, and easy to maintain, representing the ideal surface covering for walls and countertops. However, lack of trim pieces such as bullnose or quarter round in many tile lines can limit designers' options. Schluter®-Systems offers various finishing and edge-protection profiles for walls and countertops that offer increased design flexibility because they can be integrated with any field tile to create a beautiful, durable installation.

## Application and Function


### Wall Profiles

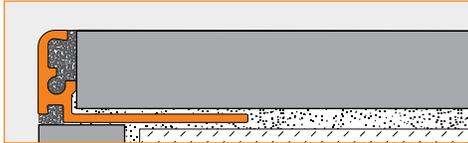

**2.3 Schluter®-JOLLY** is a finishing and edge-protection profile for the outside corners of tiled surfaces. It features a trapezoid-perforated anchoring leg that is secured in the mortar bond coat beneath the tile, and a 90° vertical wall section that provides a decorative finish and protects adjacent tiles. The profile is available in chrome-plated solid brass, color-coated aluminum, anodized aluminum, and stainless steel. Please see the Schluter®-Systems Illustrated Price List for more details. The range of available sizes and finishes permits the matching of JOLLY to a wide variety of tile and grout colors and allows many design opportunities through the use of contrasting colors. Other applications include transitions for dado coverings such as natural stone, or cold-cured resin coatings. The integrated joint spacer establishes a defined joint cavity between the tile and the profile. **Note:** JOLLY in stainless steel does not feature the integrated joint spacer in the vertical wall direction. Matching outside corners are available. Connector pins are available for abutting profiles.

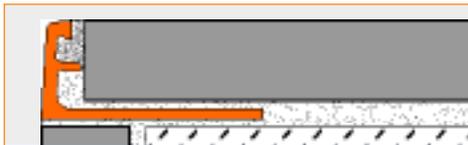

**2.3 Schluter®-JOLLY-P** is a finishing and edge-protection profile for the outside corners of tiled surfaces. It features a trapezoid-perforated anchoring leg that is secured in the mortar bond coat beneath the tile, and an 87° sloped vertical wall section that provides a decorative finish and protects adjacent tiles. The profile is available in PVC only. Other applications include transitions for dado coverings such as carpet, natural stone, or cold-cured resin coatings. The integrated joint spacer establishes a defined joint cavity between the tile and the profile.

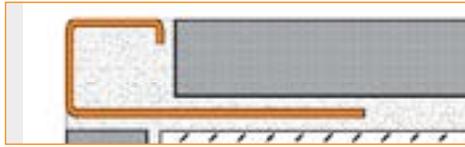


**2.10 Schluter®-QUADEC** is a finishing and edge-protection profile for the outside corners of tiled surfaces. It features a trapezoid-perforated anchoring leg that is secured in the mortar bond coat beneath the tile and a reveal that forms a square outer corner along the surface edge.

The profile is available in stainless steel, stainless steel with structured finish, anodized aluminum, color-coated aluminum, textured color-coated aluminum, and PVC. QUADEC allows for modern decorative design and interesting contrasts. The profile can be combined with the QUADEC-FS feature strip profile and the DESIGNLINE border profile for further design options. In addition to its decorative effect, the profile protects tile edges against damage caused by mechanical stresses.

QUADEC, in stainless steel, is particularly resistant to wear when used as edge protection. It may also be used as a stair nosing or floor transition profile. In addition, QUADEC is suitable for transitions, corners, or dado coverings with other covering materials; for example, carpet, parquet, natural stone tiles, or poured epoxy coverings. The integrated joint spacer forms a defined joint cavity with the tile.

**Schluter®-QUADEC-K** is a variant of the profile without an anchoring leg. It features an open cavity that is filled with thin-set mortar to secure the profile in the assembly. Alternatively, the profile may be installed with an adhesive such as Schluter®-KERDI-FIX. QUADEC-K is installed in wall applications (e.g., wainscotings and bases) with coverings up to 1/2" (12.5 mm) thick. The profile is particularly suited for finishing edges in retrofit applications, such as thin porcelain panel installation over existing wall tiles. QUADEC-K is available in anodized aluminum.

**Note:** QUADEC in stainless steel does not feature the integrated joint spacer. Matching inside/outside corners and connectors are available.

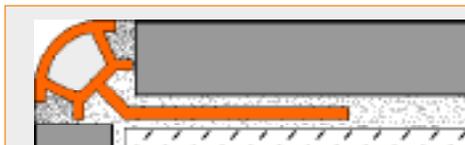


**2.1 Schluter®-RONDEC** is a finishing and edge-protection profile for the outside corners of tiled surfaces. It features a trapezoid-perforated anchoring leg that is secured in the mortar bond coat beneath the tile and a reveal that forms a symmetrically rounded outer corner with 1/4" (6 mm) radius along the surface edge. The profile is available in stainless steel, solid brass, chrome-plated solid brass, anodized aluminum, color-coated aluminum, textured color-coated aluminum, and PVC. RONDEC's wide range of materials, colors, and surface finishes allows for color coordination with tile and grout and the creation of interesting accents in decorative designs. In addition to its decorative effect, the profile protects tile edges


against damage caused by mechanical stresses. RONDEC, in stainless steel, is particularly resistant to wear when used as edge protection. It may also be used as a stair nosing or transition profile. In addition, RONDEC is suitable for transitions, corners, or dado coverings with other covering materials; for example, carpet, parquet, natural stone tiles, or cold-cured resin coatings. The integrated joint spacer forms a defined joint cavity with the tile. **Note:** RONDEC, in stainless steel and solid brass, do not feature the integrated joint spacer. Matching inside and outside corners, including sink corners, and connectors are available. Matching end caps are available for RONDEC in stainless steel.



**2.14 Schluter®-DECO-DE** is a stainless steel finishing and edge-protection profile for 135° outside corners for tiled surfaces. It features a trapezoid-perforated anchoring leg that is secured in the mortar bond coat beneath the tile and a reveal that forms a flat surface. The profile is available in stainless steel and brushed stainless steel. DECO-DE allows for modern decorative design and interesting contrasts. In addition to its decorative effect, the profile protects tile edges against damage caused by mechanical stresses.

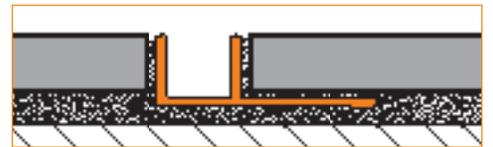


**1.9 Schluter®-DECO-SG** is a decorative profile featuring a 1/2" (12.5 mm) or 9/16" (15 mm) -wide channel that creates a shadow gap between tile courses or other wall covering. The profile may also be used as a support channel for glass walls. The 1/2" (12.5 mm) wide channel accommodates glass walls up to a thickness of 3/8" (10 mm), and the 9/16" (15 mm) wide channel accommodates glass walls up to a thickness of 1/2" (12.5 mm). DECO-SG is available in anodized aluminum and stainless steel, and features a trapezoid-perforated anchoring leg that is secured in the bond coat beneath the tile.

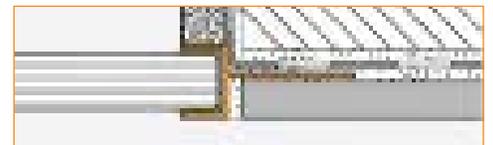


**1.9 Schluter®-DECO-SGC** is a decorative profile featuring a 1/2" (12.5 mm) or 9/16" (15 mm) -wide channel used as a vertical support channel for glass walls where the shower is recessed tile and the bathroom walls are plastered. The 1/2" (12.5 mm) wide channel accommodates glass walls up to a thickness of 3/8" (10 mm), and the 9/16" (15 mm) wide channel accommodates glass walls up to a thickness of 1/2" (12.5 mm).


DECO-SGC is available in anodized aluminum, and features a trapezoid perforated anchoring leg that is secured in the bond coat beneath the tile.

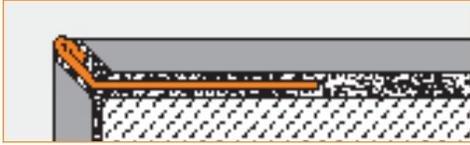

**2.17 Schluter®-FINEC** is a finishing and edge protection profile for the outside corners of tile coverings or mosaics. It features a trapezoid-perforated anchoring leg that is secured in the mortar bond coat beneath the tile and provides a slim, elegant corner. The profile is available in stainless steel, anodized aluminum, and textured color-coated aluminum. FINEC, in stainless steel, is particularly resistant to wear when used as edge protection. It may also be used as a stair nosing profile.

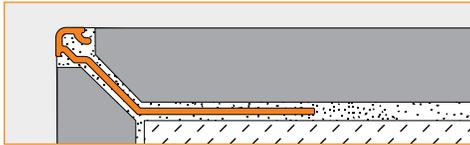

**Schluter®-FINEC-SQ** is a finishing and edge protection profile for outside corners of tile coverings and mosaics. It features a symmetrical 3/16" profile reveal that combines the slim look of FINEC with the square shape of QUADEC and a perforated anchoring leg that is secured in mortar bond coat beneath the tile. The profile is available in anodized aluminum, color-coated aluminum, and textured color-coated aluminum. **Note:** FINEC-SQ can be combined with QUADEC corner pieces.

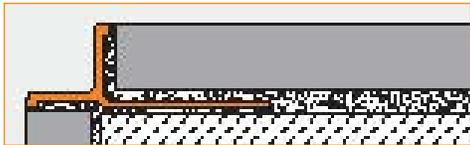

**2.12 Schluter®-INDEC** is an anodized aluminum finishing and edge-protection profile for outside corners of tiled surfaces. It features a trapezoid-perforated anchoring leg that is secured in the mortar bond coat beneath the tile, and the visible surface forms a recessed decorative channel. INDEC can be used as a transition or stop profile to a door or window frame. Matching outside corners are available.



**16.2 Schluter®-DESIGNBASE-SL** is a finishing profile used as an alternative to baseboards. The profile is available in anodized aluminum, color coated aluminum and stainless steel. It features a clean, finished look and is simply attached to the wall with a suitable adhesive. The profile can be equipped with an optional sealing lip to help protect

the floor-to-wall transition from moisture and to reduce the transmission of impact sound. Note: Inside and outside corners, connectors and end caps are available.




**2.6/2.7 Schluter®-ECK-E/-K** are stainless steel edging profiles for 90° or 135° outside corners of tiled walls that offer excellent edge protection against mechanical stresses; for example, in industrial kitchens and hospitals. In addition, the profiles produce a radiused edge along the outside wall corner for a clean, decorative finish. ECK-E features trapezoid-perforated anchoring legs that are secured in the mortar bond coat beneath the tile, while ECK-K is subsequently bonded to the outside corners of existing installations. As such, ECK-K can be installed as a repair so that existing damaged corners do not have to be replaced. ECK-E/-K are especially suitable for areas where strict hygienic requirements must be met (e.g., hospitals, industrial kitchens, clean rooms, washrooms, and food-processing plants) and where aesthetic appeal is desired. ECK-E/-K can be combined with the cove-shaped stainless steel profiles Schluter®-DILEX-EHK (for inside wall corners and floor/wall transitions) and Schluter®-DILEX-HKS (for floor/wall transitions).




**2.7 Schluter®-ECK-KI/-ECK-KHK** are stainless steel profiles that are subsequently bonded to the inside corners of existing tile or other wall coverings to produce a clean, decorative finish. As such, the profiles can be installed as a repair so that existing damaged corners do not have to be replaced. ECK-KHK provides a 5/16" (8 mm) radius to prevent the accumulation of dirt and make cleaning simple. Thus, the profile is especially suited for commercial kitchens, bathrooms, food processing plants or any environment where a sanitary corner is desired. **Note:** Matching inside and outside corners and connectors are available for ECK-KHK.

**Border Profiles**

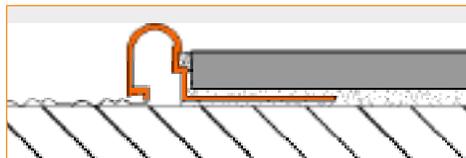


**2.5 Schluter®-RONDEC-DB**, an anodized aluminum, decorative profile for wall and skirting edges, protects the surface covering from mechanical or impact stresses. The profile features a trapezoid-perforated anchoring leg that is secured in the mortar bond coat beneath the tile and a

pronounced visible surface that establishes a clean line along tile edges and allows for decorative design. RONDEC-DB can also be used as a finishing profile within wall surfaces; for example, where other covering materials such as plaster, wallpaper, or tiles are to be joined.

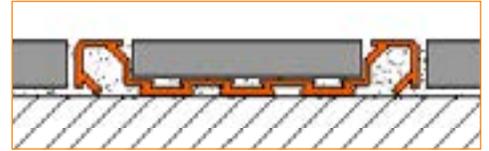

**2.11 Schluter®-QUADEC-FS** is a double-rail feature strip profile for producing accents in tile fields on walls, chair rails, and various other decorative applications. The profile is available in anodized aluminum and features a 2" (51 mm)-wide recessed section with dovetailed grooves to which field or accent tile up to 5/16" (8 mm)-thick is bonded. The top and bottom edges of the profile are square and designed to integrate with the QUADEC profile. QUADEC-FS is anchored in the mortar bond coat between tile courses via its cross-sectional shape and can be used with thicker tiles by building up the setting material behind the profile. The profile may also be attached to the substrate with fasteners (e.g., where the profile is not surrounded by field tile). **Note:** Matching inside corners/outside corners/end caps are available.

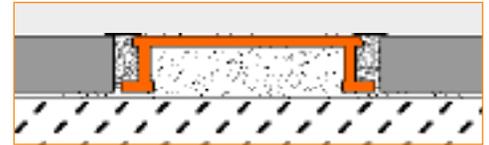

**2.2 Schluter®-DESIGNLINE** is a border profile for producing decorative designs in interior wall coverings. The profile is available in stainless steel, stainless steel with structured finish, chrome-plated solid brass, and anodized aluminum and is designed to coordinate with RONDEC and QUADEC profiles for outside wall corners. DESIGNLINE has a 1" (25 mm)-wide surface area and a thickness of 1/4" (6 mm). It is anchored in the mortar bond coat between tile courses via its cross-sectional shape and can be used with thicker tiles by building up the setting material behind the profile.

**Countertop Profiles**



**2.11 Schluter®-SCHIENE-STEP** is a finishing and edging profile for ceramic tile and natural stone installations on countertops, stairs, and tile over tile applications on walls. The profile features a trapezoid-perforated anchoring leg, which is secured in the mortar bond coat beneath the tile. The top of the profile features a vertical wall section that finishes and protects the tile from damage, while the vertical leg covers the edge of the sub-assembly, top of the riser, or existing wall tile edge.

SCHIENE-STEP is available in anodized aluminum and brushed stainless steel versions, which have different shapes and intended uses. The stainless steel version is available in three vertical leg lengths: 1-1/2" (39 mm) for countertops, 1-3/16" (30 mm) for stairs, and 7/16" (11 mm) for tile over tile applications. Matching inside and outside corners and connectors are available, depending on the vertical leg length. The anodized aluminum version is intended for residential stair applications (stairs not exposed to heavy traffic). It is available in two vertical leg lengths, 1-3/16" (30 mm) and 1-1/2" (39 mm), to cover the edge of the sub-assembly. The integrated joint spacer establishes a defined joint cavity between the tile and the profile. Accessories are not available for the anodized aluminum version.




**2.8 Schluter®-RONDEC-STEP** is a finishing and edging profile for ceramic tile and dimension stone installations on countertops and stairs. The profile features a trapezoid-perforated anchoring leg, which is secured in the mortar bond coat beneath the tile. The top of the profile features a symmetrically rounded edge with 1/4" (6 mm) radius, which matches the RONDEC profile, while the vertical leg of the profile hides the exposed edge of the sub-assembly. In addition, the profile effectively protects tiles in the edge area from mechanical and impact stresses. The integrated joint spacer establishes a defined joint cavity between the tile and the profile. RONDEC-STEP is suitable for residential applications, e.g., stairs not exposed to heavy traffic, and countertops. RONDEC-STEP is available in two different vertical leg lengths, 1-1/2" (39 mm) and 2-1/4" (57 mm), to cover the edge of the sub-assembly. The profile is available in anodized aluminum with various finishes to allow for decorative design and interesting accents. Matching corners for the RONDEC-STEP are available.



**2.9 Schluter®-RONDEC-CT** is a double-rail edging profile for countertops to be fitted with a ceramic or dimension stone tile covering. The profile features a trapezoid-perforated anchoring leg that is secured in the mortar bond coat beneath the tile, while the face of the profile features a recessed section with dovetailed grooves to which field or accent tile is bonded. The top and bottom edges of the profile are symmetrically rounded (1/4" - 6 mm radius) and match the RONDEC profile. The 1-1/2" (39 mm) vertical leg of the profile hides the exposed edge of the sub-assembly. The integrated joint spacer establishes a defined joint cavity between the tile and the profile. The profile is available in anodized aluminum and textured color-coated aluminum with various surface finishes to allow for decorative

design and interesting accents. Matching inside and outside corners are available.

### Wall Access Panel System

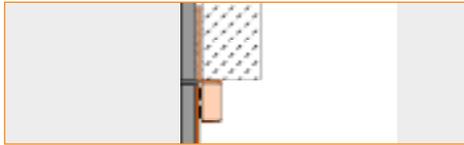

**11.1 Schluter®-REMA** is the ideal system for creating concealed access panels in tiled wall coverings. The REMA assembly kit consists of four aluminum brackets with molded casings containing magnets that are clamped to lateral, movable guide shoes, and four ferro-magnetic metal counterplates. REMA's installation is independent of tile size and thickness and enables exact matching of the access panel to the overall joint design. Thus, panels that access electrical or plumbing components do not impair the visual appearance of the tile covering.

### Material Properties and Areas of Application

Schluter® wall and countertop profiles are resistant to most chemicals encountered in tiled environments. In special cases, the suitability of a proposed type of material must be verified based on the anticipated chemical, mechanical, and/or other stresses. Exceptions and special considerations are listed below.

**Stainless steel** profiles are roll-formed, resulting in a slightly different contour from those made of extruded brass or aluminum. Stainless steel can sustain high mechanical stresses and is particularly well suited for applications requiring resistance against chemicals and acids; for example in the food industry, breweries, dairies, commercial kitchens, and hospitals, as well as in residential applications. Typically, the profiles are formed using stainless steel 304 (1.4301 = V2A). For more severe chemical exposure, such as de-icing salts and chemicals used in swimming pools, we recommend the use of stainless steel 316 L (1.4404 = V4A), which offers even higher corrosion resistance than the 304. Even stainless steel cannot withstand all chemical exposures, such as hydrochloric acid, hydrofluoric acid or certain chlorine, chloride and brine concentrations. Both stainless steel 304 and stainless steel 316 L are approved for use in exterior applications. Stainless steel 304 is not as corrosion resistant as 316 L; however, profiles in stainless steel 304 are acceptable for exterior use as long as the intended area is not susceptible to de-icing salts, chlorine, or saltwater.

**Solid brass** sustains high levels of mechanical stress; for example, as edge protection for outside wall corners or edges of surface coverings. Brass is resistant to most chemicals used in tiled environments. Solid brass that is exposed to air will oxidize, resulting in a natural patina. If exposed to moisture or aggressive substances, heavy oxidation and spotting may occur.

**Chrome-plated brass** is especially suited for wall corners and finishing applications. It is ideal for matching chrome fixtures. Surface areas must be protected against abrasion or scratching.

**Aluminum** profiles must be tested to verify their suitability if chemical stresses are anticipated. Cementitious materials, in conjunction with moisture, become alkaline. Since aluminum is sensitive to alkaline substances, exposure to the alkali (depending on the concentration and duration of exposure) may result in corrosion (aluminum hydroxide formation). Therefore, it is important to remove mortar or grout residue from visible surfaces. In addition, ensure that the profile is solidly embedded in the setting material and that all cavities are filled to prevent the collection of alkaline water.

**Anodized aluminum** profiles feature an anodized layer that retains a uniform appearance during normal use, but is not color-stable in exterior applications. The surface is susceptible to scratching and wear and may be damaged by grout or setting material. Therefore, these materials must be removed immediately. Otherwise, the description regarding aluminum applies.

**Color-coated aluminum** and **textured color-coated aluminum** are pretreated aluminum that is color-coated with a polyester powder coat. The coating is color-stable, UV-resistant, and suitable for exterior use. Protect the profile against abrasion or scratching.

**PVC** profiles are made of pre-colored, rigid PVC that resists bending or scratching. The material is UV-resistant, though not permanently color-stable, in exterior applications. PVC profiles are not suited for corners or transitions subjected to heavy mechanical stresses (e.g., at step edges or floor transitions).

Due to variations in raw materials and manufacturing, the exact color, shade, and/or texture of individual profiles may vary. The customer must inspect the products upon delivery and notify Schluter in writing of any physical damage to the products or nonconformity with the purchase order or invoice.

### Cutting Profiles

Observe all safety instructions and standards as directed by the cutting tool manufacturer, including protective eyewear, hearing protection, and gloves. Always measure carefully and dry fit the profiles, corners, and connectors to ensure proper fit and alignment prior to setting tile.

**Plastic** profiles may be cut using Schluter®-SNIPS or similar. It is important to make sure the blade is sharp to ensure a clean cut.

**Aluminum** profiles may be cut using any of the following options:

- **Hacksaw** with a bimetal blade and the highest teeth per inch (TPI) available.
- **Variable-speed angle grinder** set to the lowest speed using the Schluter®-PROCUT-TSM cutting wheel.
- **Chop saw or miter saw** with a non-ferrous blade.

Regardless of the cutting tool used, remove any burrs from the cut end of the profile with a file or

similar before installation.

**Stainless steel** profiles may be cut using any of the following options:

- **Variable-speed angle grinder** set to the lowest speed using the Schluter®-PROCUT-TSM cutting wheel.
- **Band saw** with a metal cutting blade.

Regardless of the cutting tool used, remove any burrs from the cut end of the profile with a file or similar before installation.

**Brass** profiles may be cut using any of the following options:

- **Hacksaw** with a bimetal blade and the highest teeth per inch (TPI) available.
- **Chop saw or miter saw** with a non-ferrous blade.


Regardless of the cutting tool used, remove any burrs from the cut end of the profile with a file or similar before installation.

## Installation

### JOLLY, JOLLY-P, QUADEC, RONDEC, DECO-DE, FINEC, FINEC-SQ, INDEC, DECO-SG, DECO-SGC, ECK-E, RONDEC-DB, SCHIENE-STEP, RONDEC-STEP, and RONDEC-CT

1. Select the profile according to the tile thickness and format. **Note:** RONDEC-DB can be used with tiles 1/4" - 1/2" (6 - 12.5 mm).
2. Using a notched trowel, apply thin-set mortar to the area where the profile is to be placed. If JOLLY, QUADEC, RONDEC, RONDEC-DB, DECO-DE, FINEC, or FINEC-SQ is to be used as edging for an outside wall corner, finish tiling one wall first; then trowel thin-set mortar over the corner area of the second wall.
3. Press the perforated anchoring leg of profile into the mortar and align.
4. Trowel additional thin-set mortar over the perforated anchoring leg to ensure full coverage and support of the tile edges.
5. Solidly embed the tiles so that the tiled surface is flush with the top of the profile; the profile should not be higher than the tiled surface, but rather up to approx. 1/32" (1 mm) lower.
  - 5a. If the FINEC profiles, in aluminum, are used to create a 3 way external corner, into which the two upper profiles were fitted at an angle of 45°, cut the adjoining lower profile to size. The trapezoid-perforated anchoring leg, including the joint spacer, must be cut off straight to the visible area by a minimum dimension x, depending on the profile length; see the AE illustration below.
  - 5b. If the FINEC profiles, in stainless steel, are used to create a 3 way external corner, into which the two upper profiles were fitted at an angle of 45°, cut the adjoining lower profile to size. In this case, the trapezoid-perforated

anchoring leg must be cut off by a minimum dimension x, depending on the profile length, including the visible area has to be chamfered at a 45° angle; see the E illustration below.

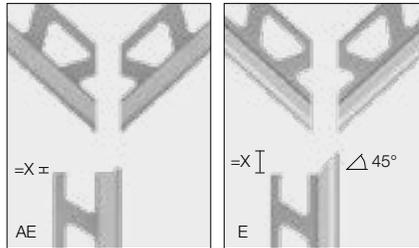

**Note:** With FINEC, chamfer tiles adjacent to the profile by 45°. RONDEC-DB is intended to be higher than the tiled surface.

6. Set the tile to the integrated joint spacer, which ensures a uniform joint of 1/16" - 1/8" (1.5 - 3 mm). With the stainless steel profiles, DECO-SG, FINEC, and RONDEC-DB, leave a space of approximately 1/16" - 1/8" (1.5 - 3 mm).
7. To set tile along the face of RONDEC-CT, apply thin-set mortar to the back of the tile using a margin trowel. Press the back-buttered tiles into the face of the profile, making sure to force thin-set mortar fully into the dovetailed grooves. The tiled surface should be flush with the outer edge of the profile; the profile should not be higher than the tiled surface, but rather up to approx. 1/32" (1 mm) lower. **Note:** The recessed face accepts tile widths up to 1-1/8" (29 mm).
8. Fill joints completely with grout or setting material. **Note:** Remove the protective foil from ECK-E immediately after grouting.
9. Work with materials and tools that will not scratch or damage sensitive surfaces. Setting materials must be removed immediately, especially from aluminum.

**Note:** Matching corners are available for JOLLY, QUADEC, RONDEC, FINEC-SQ, INDEC, SCHIENE-STEP (stainless steel version), RONDEC-STEP, and RONDEC-CT. Connectors are available for QUADEC, RONDEC, and SCHIENE-STEP (stainless steel version).

Corners and end caps are held in place with thin-set mortar. Fill the ends of the profile with thin-set mortar prior to inserting the accessories. Connectors are held in place with a friction fit. Insert the connector into the profile approximately half the length of the connector piece and connect the adjacent profile.

For installation of JOLLY corners: Install using JOLLY corner connector pin. The corner connector pin has one end with a snap feature to lock into the corner piece, with the opposite end featuring a spring function that engages with the channel of the JOLLY profile. The corner connector pin is first snapped into the corner piece, then slid into the profile channel for installation. Refer to assembly instructions on the corner packaging.

For installation of SCHIENE-STEP corners and connectors: Install using KERDI-FIX, silicone, or similar adhesive. Prior to application, any contact-inhibiting substances (e.g., grease, etc.) must be removed. The accessories should overlap the profiles by at least 3/8" (10 mm). The accessories must be slid on the profiles during profiles installation (cannot be placed over the profiles after installation).

For installation of RONDEC sink corners (1-1/2" radius):

1. Insert the sink corner connectors into the profiles. Apply thin-set mortar to the substrate and firmly embed the profiles into the mortar.
2. Using a margin trowel, fill the back of the sink corners with thin-set mortar. Install the corners over the connectors and align. Setting materials must be removed immediately.

### QUADEC-K

1. QUADEC-K may be used to cover assembly edges up to 1/2" (12.5 mm) thick.
2. Fill the profile cavity with thin-set mortar.
3. Using a notched trowel, apply thin-set mortar to the area where the profile is to be placed.
4. Press the profile into the mortar and align. Leave a space of approximately 1/16"-1/8" (1.5 - 3 mm) between the profile and tile.
5. Fill joints completely with grout or setting material.
6. Work with materials and tools that will not scratch or damage sensitive surfaces. Setting materials must be removed immediately.

**Note:** QUADEC-K may also be adhered using KERDI-FIX. Matching inside/outside corners and connectors are available.

Corners/end caps are held in place with thin-set mortar. Fill the ends of the profile with thin-set mortar prior to inserting the accessories. Connectors are held in place with a friction fit. Insert the connector into the profile approximately half the length of the connector piece and connect the adjacent profile.

### DESIGNBASE-SL

1. DESIGNBASE-SL is applied to prepared walls using KERDI-FIX or other suitable adhesive. Prior to applying the adhesive, make sure that all surfaces are free from adhesion-inhibiting substances such as oil or grease.
2. Apply beads of adhesive to the back of the profile and press the profile into the wall, ensuring solid contact throughout. In the case of the stainless steel version, apply adhesive above and below the foam spacer; see illustration on page 11.
3. Aluminum accessories must be slid on the profiles during installation. Stainless steel accessories must be applied on top after the profile is installed. Install corners, connectors,

and end caps using a permanently elastic, waterproof adhesive (e.g. KERDI-FIX or silicone). Prior to application, any contact-inhibiting substances (e.g. grease, etc.) must be removed.

4. Use a suitable cleaning agent to remove any excess adhesive from around the profile. Remove the protective foil.

**Note:** The optional sealing lip is inserted into the profile prior to installation. The lip must be pressed firmly into the profile (from the front for the aluminum version and from the rear for the stainless steel version) so that the front edge of the sealing lip is flush with the profile.

### ECK-K/-KHK/-KI

1. ECK-K/-KHK/-KI are applied to prepared wall corners using KERDI-FIX, silicone, or a similar adhesive. Prior to applying the adhesive, make sure that all surfaces are free from adhesion-inhibiting substances such as oil or grease. Apply a bead of adhesive to the back of each of the profile legs; then press the legs onto the wall covering, ensuring that the lateral edges lie flat and have solid contact throughout.
2. Use a suitable cleaning agent to remove any excess adhesive from around the profile legs.
3. Remove the protective foil.

Install ECK-KHK inside and outside corners using a permanently elastic, waterproof adhesive (e.g., KERDI-FIX or silicone). Prior to application, any contact-inhibiting substances (e.g., grease, etc.) must be removed. The connectors should overlap the profiles by at least 3/8" (10 mm).

### QUADEC-FS

1. Set tiles up to the area where QUADEC-FS is to be installed as a feature strip.
2. Using a notched trowel, apply a sufficient amount of thin-set mortar to this area and/or to the back of QUADEC-FS and press the profile into the mortar and align. Leave a space of approximately 1/16" – 1/8" (1.5 – 3 mm) between the profile and the tile.  
**Note:** QUADEC-FS may also be attached to the substrate with fasteners.
3. Set the adjacent row of tiles. Leave a space of approximately 1/16" – 1/8" (1.5 – 3 mm) between the profile and the tile.
4. To set tile along the face of QUADEC-FS, apply thin-set mortar to the back of the tile using a margin trowel. Press the back-buttered tiles into the face of the profile, making sure to force thin-set mortar fully into the dovetailed grooves. The tiled surface should be flush with the outer edge of the profile. **Note:** The recessed face accepts tile widths up to 2" (51 mm).
5. Fill joints completely with grout or setting material.
6. Work with materials and tools that will not scratch or damage sensitive surfaces. Setting materials must be removed immediately.

**Note:** Matching inside corners/outside corners/end caps are available.

Corners/end caps are held in place with thin-set mortar. Fill the ends of the profile with thin-set mortar prior to inserting the accessories.

### DESIGNLINE

1. DESIGNLINE may be used with tiles that are 1/4" (6 mm) thick or greater.
2. Set tiles up to the area where DESIGNLINE is to be installed as a decorative strip. Apply a sufficient amount of thin-set mortar to this area and/or to the back of DESIGNLINE and press the profile into the mortar until its surface is flush with the tile.
3. Set the adjacent row of tiles.
4. Set the tile to the integrated joint spacer, which ensures a uniform joint of 1/16" - 1/8" (1.5 - 3 mm). With the stainless steel and solid brass profiles, leave a space of approximately 1/16" - 1/8" (1.5 - 3 mm).
5. Fill joints completely with grout or setting material.

### REMA

1. Adhere an aluminum bracket to the back of each perimeter tile with thin-set mortar so that the magnet extends beyond the tile's edge.
2. Set tiles, with magnets attached, as perimeter limits, so that four magnets extend into the access opening.
3. To form the access panel cover, connect the corresponding number of panel cover tiles by attaching a tile to their backs with thin-set mortar.
4. Using KERDI-FIX, silicone, or a similar adhesive, adhere the counterplates to the back of the panel cover in alignment with the perimeter magnets.
5. After the adhesive has cured, install the cover and seal the surrounding joint with a color-coordinated sealing compound. **Note:** If the access opening is substantially larger than 12" x 12" (30 x 30 cm), it may be necessary to install two additional magnets.

### Maintenance

Schluter® wall and countertop profiles require no special maintenance or care and are resistant to mold and fungi. Clean profiles periodically using pH neutral cleaning agents.

**Stainless steel** surfaces exposed to the environment or aggressive substances should be cleaned periodically using a pH neutral cleaner. Regular cleaning maintains the neat appearance of stainless steel and reduces the risk of corrosion. All cleaning agents must be free of hydrochloric acid, hydrofluoric acid, and chlorides. Stainless steel surfaces develop a sheen when treated with a chrome-polishing agent.

Oxidation films on **solid brass** or **aluminum** may







be removed with a conventional polishing agent, but the film will form again.

In the case of **chrome-plated brass, anodized aluminum, color-coated aluminum, and textured color-coated aluminum** do not use abrasive cleaning agents.

Product Item Numbers




Stainless steel




**Notes:**  
 • Radius available for JOLLY in metal profiles only.  
 • JOLLY in polished aluminum and chrome-plated brass require a relatively large bending radius.

Stainless Steel

Schluter®-JOLLY		
Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)	
H = mm - in.	Profile	Outside corner
6 - 1/4	J 60 EB	EV / J 60 EB
8 - 5/16	J 80 EB	EV / J 80 EB
10 - 3/8	J 100 EB	EV / J 100 EB
11 - 7/16	J 110 EB	EV / J 110 EB
12.5 - 1/2	J 125 EB	EV / J 125 EB

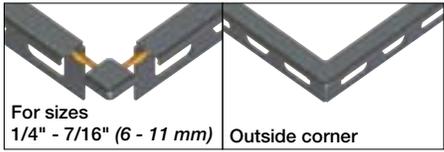


For sizes  
1/4" - 7/16" (6 - 11 mm) Outside corner

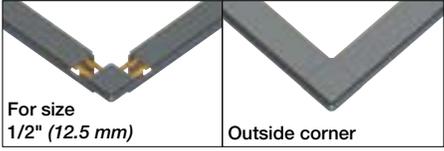

For size  
1/2" (12.5 mm) Outside corner

Brass

Schluter®-JOLLY		
Length = 2.5 m - 8' 2-1/2"	Chrome-plated solid brass (MC)	
H = mm - in.	Profile	Outside corner
6 - 1/4	J 60 MC	EV / J 60 MC
8 - 5/16	J 80 MC	EV / J 80 MC
10 - 3/8	J 100 MC	EV / J 100 MC
11 - 7/16	J 110 MC	EV / J 110 MC
12.5 - 1/2	J 125 MC	EV / J 125 MC

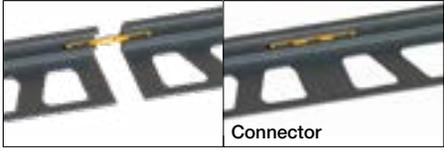


Connector

<b>Connector (4 units)</b>
V / J PP4



Anodized aluminum



Anodized Aluminum

Schluter®-JOLLY					
Length = 2.5 m - 8' 2-1/2"		Satin anodized aluminum (AE)		Polished chrome anodized aluminum (ACG)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner	
6 - 1/4	J 60 AE	EV / J 60 AE	J 60 ACG	EV / J 60 ACG	
8 - 5/16	J 80 AE	EV / J 80 AE	J 80 ACG	EV / J 80 ACG	
10 - 3/8	J 100 AE	EV / J 100 AE	J 100 ACG	EV / J 100 ACG	
11 - 7/16	J 110 AE	EV / J 110 AE	J 110 ACG	EV / J 110 ACG	
12.5 - 1/2	J 125 AE	EV / J 125 AE	J 125 ACG	EV / J 125 ACG	

Length = 2.5 m - 8' 2-1/2"		Brushed chrome anodized aluminum (ACGB)		Satin nickel anodized aluminum (AT)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner	
6 - 1/4	J 60 ACGB	EV / J 60 ACGB	J 60 AT	EV / J 60 AT	
8 - 5/16	J 80 ACGB	EV / J 80 ACGB	J 80 AT	EV / J 80 AT	
10 - 3/8	J 100 ACGB	EV / J 100 ACGB	J 100 AT	EV / J 100 AT	
11 - 7/16	J 110 ACGB	EV / J 110 ACGB	J 110 AT	EV / J 110 AT	
12.5 - 1/2	J 125 ACGB	EV / J 125 ACGB	J 125 AT	EV / J 125 AT	

Length = 2.5 m - 8' 2-1/2"		Polished nickel anodized aluminum (ATG)		Brushed nickel anodized aluminum (ATGB)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner	
6 - 1/4	J 60 ATG	EV / J 60 ATG	J 60 ATGB	EV / J 60 ATGB	
8 - 5/16	J 80 ATG	EV / J 80 ATG	J 80 ATGB	EV / J 80 ATGB	
10 - 3/8	J 100 ATG	EV / J 100 ATG	J 100 ATGB	EV / J 100 ATGB	
11 - 7/16	J 110 ATG	EV / J 110 ATG	J 110 ATGB	EV / J 110 ATGB	
12.5 - 1/2	J 125 ATG	EV / J 125 ATG	J 125 ATGB	EV / J 125 ATGB	

Length = 2.5 m - 8' 2-1/2"		Satin copper anodized aluminum (AK)		Polished copper anodized aluminum (AKG)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner	
6 - 1/4	J 60 AK	EV / J 60 AK	J 60 AKG	EV / J 60 AKG	
8 - 5/16	J 80 AK	EV / J 80 AK	J 80 AKG	EV / J 80 AKG	
10 - 3/8	J 100 AK	EV / J 100 AK	J 100 AKG	EV / J 100 AKG	
11 - 7/16	J 110 AK	EV / J 110 AK	J 110 AKG	EV / J 110 AKG	
12.5 - 1/2	J 125 AK	EV / J 125 AK	J 125 AKG	EV / J 125 AKG	

Length = 2.5 m - 8' 2-1/2"		Brushed copper anodized aluminum (AKGB)		Satin brass anodized aluminum (AM)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner	
6 - 1/4	J 60 AKGB	EV / J 60 AKGB	J 60 AM	EV / J 60 AM	
8 - 5/16	J 80 AKGB	EV / J 80 AKGB	J 80 AM	EV / J 80 AM	
10 - 3/8	J 100 AKGB	EV / J 100 AKGB	J 100 AM	EV / J 100 AM	
11 - 7/16	J 110 AKGB	EV / J 110 AKGB	J 110 AM	EV / J 110 AM	
12.5 - 1/2	J 125 AKGB	EV / J 125 AKGB	J 125 AM	EV / J 125 AM	



<b>Schluter®-JOLLY</b>				
Length = 2.5 m - 8' 2-1/2"	Polished brass anodized aluminum (AMG)		Brushed brass anodized aluminum (AMGB)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner
6 - 1/4	J 60 AMG	EV / J 60 AMG	J 60 AMGB	EV / J 60 AMGB
8 - 5/16	J 80 AMG	EV / J 80 AMG	J 80 AMGB	EV / J 80 AMGB
10 - 3/8	J 100 AMG	EV / J 100 AMG	J 100 AMGB	EV / J 100 AMGB
11 - 7/16	J 110 AMG	EV / J 110 AMG	J 110 AMGB	EV / J 110 AMGB
12.5 - 1/2	J 125 AMG	EV / J 125 AMG	J 125 AMGB	EV / J 125 AMGB

Length = 2.5 m - 8' 2-1/2"	Brushed antique bronze anodized aluminum (ABGB)		Bright black anodized aluminum (AGSG)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner
6 - 1/4	J 60 ABGB	EV / J 60 ABGB	J 60 AGSG	EV / J 60 AGSG
8 - 5/16	J 80 ABGB	EV / J 80 ABGB	J 80 AGSG	EV / J 80 AGSG
10 - 3/8	J 100 ABGB	EV / J 100 ABGB	J 100 AGSG	EV / J 100 AGSG
11 - 7/16	J 110 ABGB	EV / J 110 ABGB	J 110 AGSG	EV / J 110 AGSG
12.5 - 1/2	J 125 ABGB	EV / J 125 ABGB	J 125 AGSG	EV / J 125 AGSG

Length = 2.5 m - 8' 2-1/2"	Brushed graphite anodized aluminum (AGRB)	
H = mm - in.	Profile	Outside corner
6 - 1/4	J 60 AGRB	EV / J 60 AGRB
8 - 5/16	J 80 AGRB	EV / J 80 AGRB
10 - 3/8	J 100 AGRB	EV / J 100 AGRB
11 - 7/16	J 110 AGRB	EV / J 110 AGRB
12.5 - 1/2	J 125 AGRB	EV / J 125 AGRB

<b>10-foot (3.05 m) JOLLY Profiles – Anodized Aluminum</b>				
Length = 3.05 m - 10'	Satin anodized aluminum (AE)	Polished chrome anodized aluminum (ACG)	Satin nickel anodized aluminum (AT)	Brushed antique bronze anodized aluminum (ABGB)
H = mm - in.	Profile	Profile	Profile	Profile
8 - 5/16	J 80 AE / 300	J 80 ACG / 300	J 80 AT / 300	J 80 ABGB / 300
10 - 3/8	J 100 AE / 300	J 100 ACG / 300	J 100 AT / 300	J 100 ABGB / 300
12.5 - 1/2	J 125 AE / 300	J 125 ACG / 300	J 125 AT / 300	J 125 ABGB / 300

**Note :** For outside corners, please refer to the equivalent 8' 2-1/2" (2.5 m) profile table.

<b>Connector (4 units)</b>
V / J PP4



Schluter®-TRENDLINE Textured Color-coated Aluminum

Schluter®-JOLLY		
Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum (TS)	
H = mm - in.	Profile	Outside corner
6 - 1/4	J 60 + color*	EV / J 60 + color*
8 - 5/16	J 80 + color*	EV / J 80 + color*
10 - 3/8	J 100 + color*	EV / J 100 + color*
11 - 7/16	J 110 + color*	EV / J 110 + color*
12.5 - 1/2	J 125 + color*	EV / J 125 + color*

**\*Color Codes**

\* To complete the item number, add the **color** code (e.g., J 60 **TSC**).

Matte White and Matte Black

Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum	
H = mm - in.	Profile	Outside corner
6 - 1/4	J 60 + color*	EV / J 60 + color*
8 - 5/16	J 80 + color*	EV / J 80 + color*
10 - 3/8	J 100 + color*	EV / J 100 + color*
11 - 7/16	J 110 + color*	EV / J 110 + color*
12.5 - 1/2	J 125 + color*	EV / J 125 + color*

**\*Color Codes**

\* To complete the item number, add the **color** code (e.g., J 60 **MGS**).

10-foot (3.05 m) JOLLY Profiles – Textured Color-coated Aluminum			
Length = 3.05 m - 10'	Textured color-coated aluminum (TS)	Matte white (MBW)	Matte black (MGS)
H = mm - in.	Profile	Profile	Profile
6 - 1/4	J 60 + color* / 300	J 60 MBW / 300	J 60 MGS / 300
8 - 5/16	J 80 + color* / 300	J 80 MBW / 300	J 80 MGS / 300
10 - 3/8	J 100 + color* / 300	J 100 MBW / 300	J 100 MGS / 300
11 - 7/16	J 110 + color* / 300	J 110 MBW / 300	J 110 MGS / 300
12.5 - 1/2	J 125 + color* / 300	J 125 MBW / 300	J 125 MGS / 300

**Note :** For outside corners, please refer to the equivalent 8' 2-1/2" (2.5 m) profile table.



Color-coated Aluminum

Length = 2.5 m - 8' 2-1/2"	Color-coated aluminum	
H = mm - in.	Profile	Outside corner
6 - 1/4	J 60 + color*	EV / J 60 + color*
8 - 5/16	J 80 + color*	EV / J 80 + color*
10 - 3/8	J 100 + color*	EV / J 100 + color*
11 - 7/16	J 110 + color*	EV / J 110 + color*
12.5 - 1/2	J 125 + color*	EV / J 125 + color*

**\*Color Codes**

\* To complete the item number, add the **color** code (e.g., J 45 **G**).

<b>Connector (4 units)</b>
V / J PP4




<b>Schluter®-JOLLY-P</b>	
Length = 2.5 m - 8' 2-1/2"	<b>PVC</b>
H = mm - in.	Item No.
4.5 - 3/16	color* + 45
6 - 1/4	color* + 60
8 - 5/16	color* + 80
10 - 3/8	color* + 100
11 - 7/16	color* + 110
12.5 - 1/2	color* + 125

<b>10-foot (3.05 m) JOLLY-P Profiles – PVC</b>	
Length = 3.05 m - 10'	<b>Bright white (BW)</b>
H = mm - in.	Item No.
8 - 5/16	BW 80 / 300
10 - 3/8	BW 100 / 300
12.5 - 1/2	BW 125 / 300



Stainless steel



<b>Schluter®-RONDEC</b>				
Length = 2.5 m - 8' 2-1/2"		Stainless steel 304 (1.4301 = V2A) (E)		
H = mm - in.	Profile	Outside corner, 90°	Sink corner 3/8" (10 mm) radius	Sink corner 1-1/2" (38 mm) radius
4.5 - 3/16	RO 45 E	EV/RO 45 E	-	-
6 - 1/4	RO 60 E	EV/RO 60 E	-	-
7 - 9/32	RO 70 E	EV/RO 70 E	-	-
8 - 5/16	RO 80 E	EV/RO 80 E	I2S/RO 80 E/V2A	ISK/RO 80 E/38
9 - 11/32	RO 90 E	EV/RO 90 E	-	-
10 - 3/8	RO 100 E	EV/RO 100 E	I2S/RO 100 E/V2A	ISK/RO 100 E/38
11 - 7/16	RO 110 E	EV/RO 110 E	-	-
12.5 - 1/2	RO 125 E	EV/RO 125 E	I2S/RO 125 E/V2A	ISK/RO 125 E/38
15 - 9/16	RO 150 E	EV/RO 150 E	-	-

Length = 2.5 m - 8' 2-1/2"		Brushed stainless steel 304 (1.4301 = V2A) (EB)	Die cast metal with stainless steel appearance	
H = mm - in.	End cap	Outside corner, 90°	Inside corner, 90°	
6 - 1/4	-	ED/RO 60 E	ID/RO 60 E	
8 - 5/16	EK/RO 80 EB	ED/RO 80 E	ID/RO 80 E	
10 - 3/8	EK/RO 100 EB	ED/RO 100 E	ID/RO 100 E	
12.5 - 1/2	EK/RO 125 EB	ED/RO 125 E	ID/RO 125 E	

Length = 2.5 m - 8' 2-1/2"		Brushed stainless steel 304 (1.4301 = V2A) (EB)			
H = mm - in.	Profile	Outside corner, 90°	Sink corner 3/8" (10 mm) radius	End cap	
6 - 1/4	RO 60 EB	EV/RO 60 EB	-	-	
7 - 9/32	RO 70 EB	EV/RO 70 EB	-	-	
8 - 5/16	RO 80 EB	EV/RO 80 EB	I2S/RO 80 EB/V2A	EK/RO 80 EB	
9 - 11/32	RO 90 EB	EV/RO 90 EB	-	-	
10 - 3/8	RO 100 EB	EV/RO 100 EB	I2S/RO 100 EB/V2A	EK/RO 100 EB	
11 - 7/16	RO 110 EB	EV/RO 110 EB	-	-	
12.5 - 1/2	RO 125 EB	EV/RO 125 EB	I2S/RO 125 EB/V2A	EK/RO 125 EB	
15 - 9/16	RO 150 EB	EV/RO 150 EB	-	-	

Stainless steel 304 (1.4301 = V2A) (E)	
H = mm - in.	Connector
6 - 1/4	V/RO 60 E
8 - 5/16	V/RO 80 E
10 - 3/8	V/RO 100 E
11 - 7/16	V/RO 110 E
12.5 - 1/2	V/RO 125 E

Connector



Outside corner



Sink corner with 3/8" (10 mm) radius




End cap



Inside corner




Sink corner with 1-1/2" (38 mm) radius

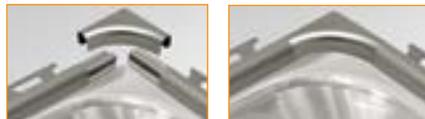

Brass

Brass



Schluter®-RONDEC				
Length = 2.5 m - 8' 2-1/2"	Chrome-plated solid brass (MC)	Aluminum with polished chrome finish		
H = mm - in.	Profile	* Outside corner, 90°	Inside corner, 90°	
6 - 1/4	RO 60 MC	EV/RO 60 ACG	IV/RO 60 ACG	
8 - 5/16	RO 80 MC	EV/RO 80 ACG	IV/RO 80 ACG	
10 - 3/8	RO 100 MC	EV/RO 100 ACG	IV/RO 100 ACG	
12.5 - 1/2	RO 125 MC	EV/RO 125 ACG	IV/RO 125 ACG	



Anodized Aluminum



Anodized Aluminum



Schluter®-RONDEC				
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AE	EV/RO 60 AE	IV/RO 60 AE	V/RO 60
8 - 5/16	RO 80 AE	EV/RO 80 AE	IV/RO 80 AE	V/RO 80
10 - 3/8	RO 100 AE	EV/RO 100 AE	IV/RO 100 AE	V/RO 100
12.5 - 1/2	RO 125 AE	EV/RO 125 AE	IV/RO 125 AE	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AE	I2L/RO 80 AE
10 - 3/8	E2L/RO 100 AE	I2L/RO 100 AE
12.5 - 1/2	E2L/RO 125 AE	I2L/RO 125 AE

Length = 2.5 m - 8' 2-1/2"	Polished chrome anod. alu. (ACG)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 ACG	EV/RO 60 ACG	IV/RO 60 ACG	V/RO 60
8 - 5/16	RO 80 ACG	EV/RO 80 ACG	IV/RO 80 ACG	V/RO 80
10 - 3/8	RO 100 ACG	EV/RO 100 ACG	IV/RO 100 ACG	V/RO 100
12.5 - 1/2	RO 125 ACG	EV/RO 125 ACG	IV/RO 125 ACG	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 ACG	I2L/RO 80 ACG
10 - 3/8	E2L/RO 100 ACG	I2L/RO 100 ACG
12.5 - 1/2	E2L/RO 125 ACG	I2L/RO 125 ACG

Length = 2.5 m - 8' 2-1/2"	Brushed chrome anod. alu. (ACGB)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 ACGB	EV/RO 60 ACGB	IV/RO 60 ACGB	V/RO 60
8 - 5/16	RO 80 ACGB	EV/RO 80 ACGB	IV/RO 80 ACGB	V/RO 80
10 - 3/8	RO 100 ACGB	EV/RO 100 ACGB	IV/RO 100 ACGB	V/RO 100
12.5 - 1/2	RO 125 ACGB	EV/RO 125 ACGB	IV/RO 125 ACGB	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 ACGB	I2L/RO 80 ACGB
10 - 3/8	E2L/RO 100 ACGB	I2L/RO 100 ACGB
12.5 - 1/2	E2L/RO 125 ACGB	I2L/RO 125 ACGB



<b>Schluter®-RONDEC</b>				
Length = 2.5 m - 8' 2-1/2"		Satin nickel anod. alu. (AT)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AT	EV/RO 60 AT	IV/RO 60 AT	V/RO 60
8 - 5/16	RO 80 AT	EV/RO 80 AT	IV/RO 80 AT	V/RO 80
10 - 3/8	RO 100 AT	EV/RO 100 AT	IV/RO 100 AT	V/RO 100
12.5 - 1/2	RO 125 AT	EV/RO 125 AT	IV/RO 125 AT	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AT	I2L/RO 80 AT
10 - 3/8	E2L/RO 100 AT	I2L/RO 100 AT
12.5 - 1/2	E2L/RO 125 AT	I2L/RO 125 AT

Length = 2.5 m - 8' 2-1/2"		Polished nickel anod. alu. (ATG)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 ATG	EV/RO 60 ATG	IV/RO 60 ATG	V/RO 60
8 - 5/16	RO 80 ATG	EV/RO 80 ATG	IV/RO 80 ATG	V/RO 80
10 - 3/8	RO 100 ATG	EV/RO 100 ATG	IV/RO 100 ATG	V/RO 100
12.5 - 1/2	RO 125 ATG	EV/RO 125 ATG	IV/RO 125 ATG	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 ATG	I2L/RO 80 ATG
10 - 3/8	E2L/RO 100 ATG	I2L/RO 100 ATG
12.5 - 1/2	E2L/RO 125 ATG	I2L/RO 125 ATG

Length = 2.5 m - 8' 2-1/2"		Brushed nickel anod. alu. (ATGB)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 ATGB	EV/RO 60 ATGB	IV/RO 60 ATGB	V/RO 60
8 - 5/16	RO 80 ATGB	EV/RO 80 ATGB	IV/RO 80 ATGB	V/RO 80
10 - 3/8	RO 100 ATGB	EV/RO 100 ATGB	IV/RO 100 ATGB	V/RO 100
12.5 - 1/2	RO 125 ATGB	EV/RO 125 ATGB	IV/RO 125 ATGB	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 ATGB	I2L/RO 80 ATGB
10 - 3/8	E2L/RO 100 ATGB	I2L/RO 100 ATGB
12.5 - 1/2	E2L/RO 125 ATGB	I2L/RO 125 ATGB

Length = 2.5 m - 8' 2-1/2"		Satin copper anod. alu. (AK)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AK	EV/RO 60 AK	IV/RO 60 AK	V/RO 60
8 - 5/16	RO 80 AK	EV/RO 80 AK	IV/RO 80 AK	V/RO 80
10 - 3/8	RO 100 AK	EV/RO 100 AK	IV/RO 100 AK	V/RO 100
12.5 - 1/2	RO 125 AK	EV/RO 125 AK	IV/RO 125 AK	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AK	I2L/RO 80 AK
10 - 3/8	E2L/RO 100 AK	I2L/RO 100 AK
12.5 - 1/2	E2L/RO 125 AK	I2L/RO 125 AK



<b>Schluter®-RONDEC</b>				
Length = 2.5 m - 8' 2-1/2"	Polished copper anod. alu. (AKG)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AKG	EV/RO 60 AKG	IV/RO 60 AKG	V/RO 60
8 - 5/16	RO 80 AKG	EV/RO 80 AKG	IV/RO 80 AKG	V/RO 80
10 - 3/8	RO 100 AKG	EV/RO 100 AKG	IV/RO 100 AKG	V/RO 100
12.5 - 1/2	RO 125 AKG	EV/RO 125 AKG	IV/RO 125 AKG	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AKG	I2L/RO 80 AKG
10 - 3/8	E2L/RO 100 AKG	I2L/RO 100 AKG
12.5 - 1/2	E2L/RO 125 AKG	I2L/RO 125 AKG

Length = 2.5 m - 8' 2-1/2"	Brushed copper anod. alu. (AKGB)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AKGB	EV/RO 60 AKGB	IV/RO 60 AKGB	V/RO 60
8 - 5/16	RO 80 AKGB	EV/RO 80 AKGB	IV/RO 80 AKGB	V/RO 80
10 - 3/8	RO 100 AKGB	EV/RO 100 AKGB	IV/RO 100 AKGB	V/RO 100
12.5 - 1/2	RO 125 AKGB	EV/RO 125 AKGB	IV/RO 125 AKGB	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AKGB	I2L/RO 80 AKGB
10 - 3/8	E2L/RO 100 AKGB	I2L/RO 100 AKGB
12.5 - 1/2	E2L/RO 125 AKGB	I2L/RO 125 AKGB

Length = 2.5 m - 8' 2-1/2"	Brushed antique bronze anod. alu. (ABGB)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 ABGB	EV/RO 60 ABGB	IV/RO 60 ABGB	V/RO 60
8 - 5/16	RO 80 ABGB	EV/RO 80 ABGB	IV/RO 80 ABGB	V/RO 80
10 - 3/8	RO 100 ABGB	EV/RO 100 ABGB	IV/RO 100 ABGB	V/RO 100
12.5 - 1/2	RO 125 ABGB	EV/RO 125 ABGB	IV/RO 125 ABGB	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 ABGB	I2L/RO 80 ABGB
10 - 3/8	E2L/RO 100 ABGB	I2L/RO 100 ABGB
12.5 - 1/2	E2L/RO 125 ABGB	I2L/RO 125 ABGB

Length = 2.5 m - 8' 2-1/2"	Satin brass anod. alu. (AM)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AM	EV/RO 60 AM	IV/RO 60 AM	V/RO 60
8 - 5/16	RO 80 AM	EV/RO 80 AM	IV/RO 80 AM	V/RO 80
10 - 3/8	RO 100 AM	EV/RO 100 AM	IV/RO 100 AM	V/RO 100
12.5 - 1/2	RO 125 AM	EV/RO 125 AM	IV/RO 125 AM	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AM	I2L/RO 80 AM
10 - 3/8	E2L/RO 100 AM	I2L/RO 100 AM
12.5 - 1/2	E2L/RO 125 AM	I2L/RO 125 AM



<b>Schluter®-RONDEC</b>				
Length = 2.5 m - 8' 2-1/2"	Polished brass anod. alu. (AMG)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AMG	EV/RO 60 AMG	IV/RO 60 AMG	V/RO 60
8 - 5/16	RO 80 AMG	EV/RO 80 AMG	IV/RO 80 AMG	V/RO 80
10 - 3/8	RO 100 AMG	EV/RO 100 AMG	IV/RO 100 AMG	V/RO 100
12.5 - 1/2	RO 125 AMG	EV/RO 125 AMG	IV/RO 125 AMG	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AMG	I2L/RO 80 AMG
10 - 3/8	E2L/RO 100 AMG	I2L/RO 100 AMG
12.5 - 1/2	E2L/RO 125 AMG	I2L/RO 125 AMG

Length = 2.5 m - 8' 2-1/2"	Brushed brass anod. alu. (AMGB)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AMGB	EV/RO 60 AMGB	IV/RO 60 AMGB	V/RO 60
8 - 5/16	RO 80 AMGB	EV/RO 80 AMGB	IV/RO 80 AMGB	V/RO 80
10 - 3/8	RO 100 AMGB	EV/RO 100 AMGB	IV/RO 100 AMGB	V/RO 100
12.5 - 1/2	RO 125 AMGB	EV/RO 125 AMGB	IV/RO 125 AMGB	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AMGB	I2L/RO 80 AMGB
10 - 3/8	E2L/RO 100 AMGB	I2L/RO 100 AMGB
12.5 - 1/2	E2L/RO 125 AMGB	I2L/RO 125 AMGB

Length = 2.5 m - 8' 2-1/2"	Graphite anod. alu. (AGR)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AGR	EV/RO 60 AGR	IV/RO 60 AGR	V/RO 60
8 - 5/16	RO 80 AGR	EV/RO 80 AGR	IV/RO 80 AGR	V/RO 80
10 - 3/8	RO 100 AGR	EV/RO 100 AGR	IV/RO 100 AGR	V/RO 100
12.5 - 1/2	RO 125 AGR	EV/RO 125 AGR	IV/RO 125 AGR	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AGR	I2L/RO 80 AGR
10 - 3/8	E2L/RO 100 AGR	I2L/RO 100 AGR
12.5 - 1/2	E2L/RO 125 AGR	I2L/RO 125 AGR


Length = 2.5 m - 8' 2-1/2"	Bright black anod. alu. (AGSG)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AGSG	EV/RO 60 AGSG	IV/RO 60 AGSG	V/RO 60
8 - 5/16	RO 80 AGSG	EV/RO 80 AGSG	IV/RO 80 AGSG	V/RO 80
10 - 3/8	RO 100 AGSG	EV/RO 100 AGSG	IV/RO 100 AGSG	V/RO 100
12.5 - 1/2	RO 125 AGSG	EV/RO 125 AGSG	IV/RO 125 AGSG	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AGSG	I2L/RO 80 AGSG
10 - 3/8	E2L/RO 100 AGSG	I2L/RO 100 AGSG
12.5 - 1/2	E2L/RO 125 AGSG	I2L/RO 125 AGSG

Schluter®-RONDEC				
Length = 2.5 m - 8' 2-1/2"	Brushed black anod. alu. (AGSB)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 AGSB	EV/RO 60 AGSB	IV/RO 60 AGSB	V/RO 60
8 - 5/16	RO 80 AGSB	EV/RO 80 AGSB	IV/RO 80 AGSB	V/RO 80
10 - 3/8	RO 100 AGSB	EV/RO 100 AGSB	IV/RO 100 AGSB	V/RO 100
12.5 - 1/2	RO 125 AGSB	EV/RO 125 AGSB	IV/RO 125 AGSB	V/RO 125

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°
8 - 5/16	E2L/RO 80 AGSB	I2L/RO 80 AGSB
10 - 3/8	E2L/RO 100 AGSB	I2L/RO 100 AGSB
12.5 - 1/2	E2L/RO 125 AGSB	I2L/RO 125 AGSB

10-foot (3.05 m) RONDEC Profiles – Anodized Aluminum			
Length = 3.05 m - 10'	Satin anod. alu. (AE)	Polished chrome anod. alu. (ACG)	Satin nickel anod. alu. (AT)
H = mm - in.	Profile	Profile	Profile
8 - 5/16	RO 80 AE / 300	RO 80 ACG / 300	RO 80 AT / 300
10 - 3/8	RO 100 AE / 300	RO 100 ACG / 300	RO 100 AT / 300
12.5 - 1/2	RO 125 AE / 300	RO 125 ACG / 300	RO 125 AT / 300

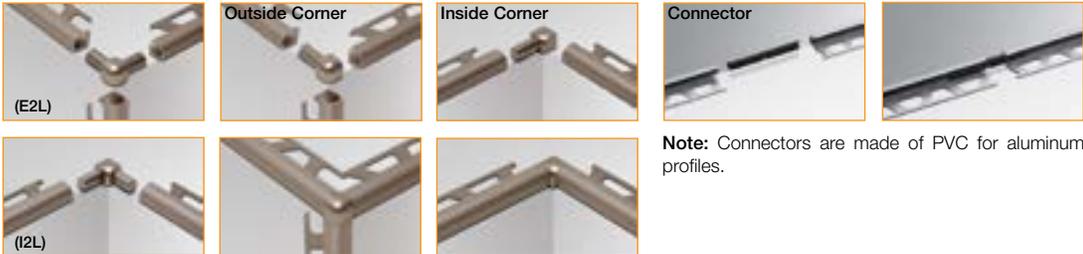

**Note :** Inside/outside double-leg corners (E2L and I2L) and sink corners with 3/8" (10 mm) radius are available in 80, 100 and 125 only. They are not available in textured color-coated aluminum finishes.

Schluter®-TRENDLINE Textured Color-coated Aluminum

Textured Color-coated Aluminum



Schluter®-RONDEC				
Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum (TS)			
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	Connector
6 - 1/4	RO 60 + color*	EV/RO 60 + color*	IV/RO 60 + color*	V/RO 60
8 - 5/16	RO 80 + color*	EV/RO 80 + color*	IV/RO 80 + color*	V/RO 80
10 - 3/8	RO 100 + color*	EV/RO 100 + color*	IV/RO 100 + color*	V/RO 100
11 - 7/16	RO 110 + color*	EV/RO 110 + color*	IV/RO 110 + color*	V/RO 110
12.5 - 1/2	RO 125 + color*	EV/RO 125 + color*	IV/RO 125 + color*	V/RO 125

**\*Color Codes**

Ivory	Greige	Stone grey	Cream	Beige	Rustic brown	Bronze	Pewter	Light anthracite	Dark anthracite

\* To complete the item number, add the color code (e.g., RO 60 TSC).

Matte White and Matte Black

Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum			
H = mm - in.	Profile	Outside corner, 90° (die cast)	Inside corner, 90° (die cast)	Connector
6 - 1/4	RO 60 + color*	ED/RO 60 + color*	ID/RO 60 + color*	V/RO 60
8 - 5/16	RO 80 + color*	ED/RO 80 + color*	ID/RO 80 + color*	V/RO 80
10 - 3/8	RO 100 + color*	ED/RO 100 + color*	ID/RO 100 + color*	V/RO 100
11 - 7/16	RO 110 + color*	ED/RO 110 + color*	ID/RO 110 + color*	V/RO 110
12.5 - 1/2	RO 125 + color*	ED/RO 125 + color*	ID/RO 125 + color*	V/RO 125

**\*Color Codes**

		* To complete the item number, add the color code (e.g., RO 60 MGS).
Matte white	Matte black	

10-foot (3.05 m) RONDEC Profiles – Textured Color-coated Aluminum			
Length = 3.05 m - 10'	Textured color-coated aluminum (TS)	Matte white (MBW)	Matte black (MGS)
H = mm - in.	Profile	Profile	Profile
6 - 1/4	RO 60 + color* / 300	RO 60 MBW / 300	RO 60 MGS / 300
8 - 5/16	RO 80 + color* / 300	RO 80 MBW / 300	RO 80 MGS / 300
10 - 3/8	RO 100 + color* / 300	RO 100 MBW / 300	RO 100 MGS / 300
11 - 7/16	RO 110 + color* / 300	RO 110 MBW / 300	RO 110 MGS / 300
12.5 - 1/2	RO 125 + color* / 300	RO 125 MBW / 300	RO 125 MGS / 300

Color-coated Aluminum



Color-coated Aluminum



Schluter®-RONDEC					
Length = 2.5 m - 8' 2-1/2"		Color-coated aluminum (AC)			
H = mm - in.	Profile	Outside corner, 90° (die cast)	Inside corner, 90° (die cast)	Connector	
6 - 1/4	RO 60 + color*	ED/RO 60 + color*	ID/RO 60 + color*	V/RO 60	
8 - 5/16	RO 80 + color*	ED/RO 80 + color*	ID/RO 80 + color*	V/RO 80	
10 - 3/8	RO 100 + color*	ED/RO 100 + color*	ID/RO 100 + color*	V/RO 100	
12.5 - 1/2	RO 125 + color*	ED/RO 125 + color*	ID/RO 125 + color*	V/RO 125	


**\*Color Codes**

Bright white	White	Sand pebble	Bahama	Light beige	Light grey	Classic grey	Grey	Metallic grey	Black brown	Black

\* To complete the item number, add the color code (e.g., RO 60 G).

PVC

PVC



Length = 2.5 m - 8' 2-1/2"		PVC (P)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	
6 - 1/4	PRO 60 + color*	E/PRO 60 + color*	I/PRO 60 + color*	
8 - 5/16	PRO 80 + color*	E/PRO 80 + color*	I/PRO 80 + color*	
10 - 3/8	PRO 100 + color*	E/PRO 100 + color*	I/PRO 100 + color*	
11 - 7/16	PRO 110 + color*	E/PRO 110 + color*	I/PRO 110 + color*	
12.5 - 1/2	PRO 125 + color*	E/PRO 125 + color*	I/PRO 125 + color*	


**\*Color Codes**

Bright white	White	Sand pebble	Bahama	Light beige	Light grey	Classic grey	Grey	Black

\* To complete the item number, add the color code (e.g., PRO 60 G).



Stainless steel



Schluter®-QUADEC				
Length = 2.5 m - 8' 2-1/2"		Stainless steel 304 (1.4301 = V2A) (E)		
H = mm - in.	Profile	Inside/outside corner	Connector	
4.5 - 3/16	Q 45 E	EV/Q 45 E	-	
6 - 1/4	Q 60 E	EV/Q 60 E	V/RO 60 E	
7 - 9/32	Q 70 E	EV/Q 70 E	-	
8 - 5/16	Q 80 E	EV/Q 80 E	V/RO 80 E	
9 - 11/32	Q 90 E	EV/Q 90 E	-	
10 - 3/8	Q 100 E	EV/Q 100 E	V/RO 100 E	
11 - 7/16	Q 110 E	EV/Q 110 E	V/RO 110 E	
12.5 - 1/2	Q 125 E	EV/Q 125 E	V/RO 125 E	
14 - 17/32	Q 140 E	EV/Q 140 E	-	
15 - 9/16	Q 150 E	EV/Q 150 E	-	




**Note:** The same corner piece can be used to produce a 90° inside corner and a 90° outside corner. It can also be used as an end cap.

Length = 2.5 m - 8' 2-1/2"		Brushed stainless steel 304 (1.4301 = V2A) (EB)		
H = mm - in.	Profile	Inside/outside corner	Connector	
6 - 1/4	Q 60 EB	EV/Q 60 EB	V/RO 60 E	
7 - 9/32	Q 70 EB	EV/Q 70 EB	-	
8 - 5/16	Q 80 EB	EV/Q 80 EB	V/RO 80 E	
9 - 11/32	Q 90 EB	EV/Q 90 EB	-	
10 - 3/8	Q 100 EB	EV/Q 100 EB	V/RO 100 E	
11 - 7/16	Q 110 EB	EV/Q 110 EB	V/RO 110 E	
12.5 - 1/2	Q 125 EB	EV/Q 125 EB	V/RO 125 E	
14 - 17/32	Q 140 EB	EV/Q 140 EB	-	
15 - 9/16	Q 150 EB	EV/Q 150 EB	-	



Aluminum



Schluter®-QUADEC						
Length = 2.5 m - 8' 2-1/2"		Satin anodized aluminum (AE)		Polished chrome anodized aluminum (ACG)		Connector
H = mm - in.	Profile	Inside/outside corner	Profile	Inside/outside corner	Item No.	
4.5 - 3/16	Q 45 AE	EV/Q 45 AE	Q 45 ACG	EV/Q 45 ACG	-	
6 - 1/4	Q 60 AE	EV/Q 60 AE	Q 60 ACG	EV/Q 60 ACG	V/Q 60	
8 - 5/16	Q 80 AE	EV/Q 80 AE	Q 80 ACG	EV/Q 80 ACG	V/RO 80	
10 - 3/8	Q 100 AE	EV/Q 100 AE	Q 100 ACG	EV/Q 100 ACG	V/RO 100	
12.5 - 1/2	Q 125 AE	EV/Q 125 AE	Q 125 ACG	EV/Q 125 ACG	V/RO 125	
15 - 9/16	Q 150 AE	EV/Q 150 AE	-	-	-	
20 - 3/4	Q 200 AE	EV/Q 200 AE	-	-	-	

Length = 2.5 m - 8' 2-1/2"		Satin nickel anodized aluminum (AT)		Brushed nickel anodized aluminum (ATGB)		Connector
H = mm - in.	Profile	Inside/outside corner	Profile	Inside/outside corner	Item No.	
4.5 - 3/16	Q 45 AT	EV/Q 45 AT	-	-	-	
6 - 1/4	Q 60 AT	EV/Q 60 AT	-	-	V/Q 60	
8 - 5/16	Q 80 AT	EV/Q 80 AT	Q 80 ATGB	EV/Q 80 ATGB	V/RO 80	
10 - 3/8	Q 100 AT	EV/Q 100 AT	Q 100 ATGB	EV/Q 100 ATGB	V/RO 100	
12.5 - 1/2	Q 125 AT	EV/Q 125 AT	Q 125 ATGB	EV/Q 125 ATGB	V/RO 125	

Length = 2.5 m - 8' 2-1/2"		Brushed antique bronze anodized aluminum (ABGB)		Connector
H = mm - in.	Profile	Inside/outside corner	Item No.	
6 - 1/4	Q 60 ABGB	EV/Q 60 ABGB	V/Q 60	
8 - 5/16	Q 80 ABGB	EV/Q 80 ABGB	V/RO 80	
10 - 3/8	Q 100 ABGB	EV/Q 100 ABGB	V/RO 100	
12.5 - 1/2	Q 125 ABGB	EV/Q 125 ABGB	V/RO 125	




10-foot (3.05 m) QUADEC Profiles – Anodized Aluminum	
Length = 3.05 m - 10'	Polished chrome anodized aluminum (ACG)
H = mm - in.	Profile
8 - 5/16	Q 80 ACG / 300
10 - 3/8	Q 100 ACG / 300
12.5 - 1/2	Q 125 ACG / 300

Schluter®-TRENDLINE Textured Color-coated Aluminum



Aluminum



Schluter®-QUADEC			
Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum (TS)		
H = mm - in.	Profile	Inside/outside corner	Connector
4.5 - 3/16	Q 45 + color*	EV/Q 45 + color*	-
6 - 1/4	Q 60 + color*	EV/Q 60 + color*	V/Q 60
8 - 5/16	Q 80 + color*	EV/Q 80 + color*	V/RO 80
10 - 3/8	Q 100 + color*	EV/Q 100 + color*	V/RO 100
11 - 7/16	Q 110 + color*	EV/Q 110 + color*	V/RO 110
12.5 - 1/2	Q 125 + color*	EV/Q 125 + color*	V/RO 125

**\*Color Codes**

Ivory	Greige	Stone grey	Cream	Beige	Rustic brown	Bronze	Pewter	Light anthracite	Dark anthracite

\* To complete the item number, add the color code (e.g., Q 60 TSC).

Matte White and Matte Black

Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum		
H = mm - in.	Profile	Inside/outside corner	Connector
4.5 - 3/16	Q 45 + color*	EV/Q 45 + color*	-
6 - 1/4	Q 60 + color*	EV/Q 60 + color*	V/Q 60
8 - 5/16	Q 80 + color*	EV/Q 80 + color*	V/RO 80
10 - 3/8	Q 100 + color*	EV/Q 100 + color*	V/RO 100
11 - 7/16	Q 110 + color*	EV/Q 110 + color*	V/RO 110
12.5 - 1/2	Q 125 + color*	EV/Q 125 + color*	V/RO 125


**\*Color Codes**

		* To complete the item number, add the color code (e.g., Q 60 MGS).
Matte white	Matte black	

10-foot (3.05 m) QUADEC Profiles – Textured Color-coated Aluminum			
Length = 3.05 m - 10'	Textured color-coated aluminum (TS)	Matte white (MBW)	Matte black (MGS)
H = mm - in.	Profile	Profile	Profile
6 - 1/4	Q 60 + color* / 300	Q 60 MBW / 300	Q 60 MGS / 300
8 - 5/16	Q 80 + color* / 300	Q 80 MBW / 300	Q 80 MGS / 300
10 - 3/8	Q 100 + color* / 300	Q 100 MBW / 300	Q 100 MGS / 300
11 - 7/16	Q 110 + color* / 300	Q 110 MBW / 300	Q 110 MGS / 300
12.5 - 1/2	Q 125 + color* / 300	Q 125 MBW / 300	Q 125 MGS / 300

Color-coated Aluminum

Aluminum



Schluter®-QUADEC			
Length = 2.5 m - 8' 2-1/2"	Color-coated aluminum (AC)		
H = mm - in.	Profile	Outside corner, 90° (die cast)	
4.5 - 3/16	Q 45 + color*	ED/Q	45 + color*
6 - 1/4	Q 60 + color*	ED/Q	60 + color*
8 - 5/16	Q 80 + color*	ED/Q	80 + color*
10 - 3/8	Q 100 + color*	ED/Q	100 + color*
11 - 7/16	Q 110 + color*	ED/Q	110 + color*
12.5 - 1/2	Q 125 + color*	ED/Q	125 + color*

**\*Color Codes**

BW Bright white	W White	SP Sand pebble	PG Classic grey	QG Quartz Grey
VG Traffic grey	SB Black brown	GS Black		

\* To complete the item number, add the color code (e.g., Q 45 PG).

PVC



PVC



Length = 2.5 m - 8' 2-1/2"	PVC (P)		
H = mm - in.	Profile	Outside corner, 90°	
6 - 1/4	PQ 60 + color*	E/PQ	60 + color*
8 - 5/16	PQ 80 + color*	E/PQ	80 + color*
10 - 3/8	PQ 100 + color*	E/PQ	100 + color*
11 - 7/16	PQ 110 + color*	E/PQ	110 + color*
12.5 - 1/2	PQ 125 + color*	E/PQ	125 + color*

**\*Color Codes**

BW Bright white	W White	SP Sand pebble	BH Bahama	HB Light beige
HG Light grey	PG Classic grey	G Grey	GS Black	

\* To complete the item number, add the color code (e.g., PQ 80 PG).



Schluter®-QUADEC-K						
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)			Polished chrome anod. alu. (ACG)		
	Profile	Inside/outside corner	Connector	Profile	Inside/outside corner	Connector
12.5 mm - 1/2"	Q 125 AE K	EV/Q 125 AE	V/RO 125	Q 125 ACG K	EV/Q 125 ACG	V/RO 125

Length = 2.5 m - 8' 2-1/2"	Satin nickel anod. alu. (AT)			Brushed antique bronze anod. alu. (ABGB)		
	Profile	Inside/outside corner	Connector	Profile	Inside/outside corner	Connector
12.5 mm - 1/2"	Q 125 AT K	EV/Q 125 AT	V/RO 125	Q 125 ABGB K	EV/Q 125 ABGB	V/RO 125



Aluminum






Schluter®-QUADEC-FS				
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)		Polished chrome anod. alu. (ACG)	
	Profile	Inside/outside corner	Profile	Inside/outside corner
8 - 5/16	QF8/50 AE	EV/QF8/50 AE	QF8/50 ACG	EV/QF8/50 ACG

Length = 2.5 m - 8' 2-1/2"	Satin nickel anod. alu. (AT)		Brushed antique bronze anod. alu. (ABGB)	
	Profile	Inside/outside corner	Profile	Inside/outside corner
8 - 5/16	QF8/50 AT	EV/QF8/50 AT	QF8/50 ABGB	EV/QF8/50 ABGB

Inside/outside corner/  
End cap






Schluter®-FINEC		
Length = 2.5 m - 8' 2-1/2"	Stainless steel 304 (1.4301 = V2A) (E)	Satin anodized aluminum (AE)
H = mm - in.	Item No.	Item No.
2.5 - 3/32	-	F 25 AE
4.5 - 3/16	F 45 E	F 45 AE
7 - 9/32	F 70 E	F 70 AE
9 - 11/32	F 90 E	F 90 AE
11 - 7/16	F 110 E	F 110 AE
12.5 - 1/2	F 125 E	F 125 AE

Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum
H = mm - in.	Item No.
2.5 - 3/32	F 25 MBW
4.5 - 3/16	F 45 + color*
7 - 9/32	F 70 + color*
9 - 11/32	F 90 + color*
11 - 7/16	F 110 + color*
12.5 - 1/2	F 125 + color*

**\*Color Codes**


\* To complete the item number, add the **color** code (e.g., F 70 **TSC**).




Schluter®-FINEC-SQ		
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)	
H = mm - in.	Profile	Inside/Outside Corner
11 - 7/16	FSQ 110 AE	EV/Q 45 AE
12.5 - 1/2	FSQ 125 AE	
15 - 9/16	FSQ 150 AE	

Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum	
H = mm - in.	Profile	Inside/Outside Corner
11 - 7/16	FSQ 110 + color*	EV/Q 45 + color*
12.5 - 1/2	FSQ 125 + color*	
15 - 9/16	FSQ 150 + color*	


**\*Color Codes**


\* To complete the item number, add the **color** code (e.g., FSQ 110 **TSC**).

**Note:** The visible surface for all sizes of FINEC-SQ matches that of QUADREC 45. All FINEC-SQ sizes are compatible with EV/ Q 45 only.



Schluter®-INDEC				
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)	Cast zinc with AE appearance	Polished chrome anod. alu. (ACG)	Cast zinc with ACG appearance
H = mm - in.	Profile	Outside corner 90°	Profile	Outside corner 90°
8 - 5/16	IN 80 AE	ED / IN 80 AE	IN 80 ACG	ED / IN 80 ACG
10 - 3/8	IN 100 AE	ED / IN 100 AE	IN 100 ACG	ED / IN 100 ACG
11 - 7/16	IN 110 AE	ED / IN 110 AE	IN 110 ACG	ED / IN 110 ACG
12.5 - 1/2	IN 125 AE	ED / IN 125 AE	IN 125 ACG	ED / IN 125 ACG




Schluter®-RONDEC-DB				
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)		Satin copper anod. alu. (AK)	Satin brass anod. alu. (AM)
H = mm - in.	Profile	Outside corner, 90°	Profile	Profile
14 - 17/32	DB 14 AE	EV/DB 14 AE	DB 14 AK	DB 14 AM


10-foot (3.05 m) RONDEC-DB Profile	
Length = 3.05 m - 10'	Satin anodized aluminum (AE)
H = mm - in.	Profile
14 - 17/32	DB 14 AE / 300



Aluminum



Stainless steel, Brass



Schluter®-DESIGNLINE			
Length = 2.5 m - 8' 2-1/2"	Stainless steel 304 (1.4301 = V2A) (E)	Brushed stainless steel 304 (1.4301 = V2A) (EB)	Chrome-plated solid brass (MC)
H = mm - in.	Item No.	Item No.	Item No.
6 - 1/4	DL 625 E	DL 625 EB	DL 625 MC

Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)	Polished chrome anod. alu. (ACG)	Brushed chrome anod. alu. (ACGB)
H = mm - in.	Item No.	Item No.	Item No.
6 - 1/4	DL 625 AE	DL 625 ACG	DL 625 ACGB

Length = 2.5 m - 8' 2-1/2"	Satin nickel anod. alu. (AT)	Polished nickel anod. alu. (ATG)	Brushed nickel anod. alu. (ATGB)
H = mm - in.	Item No.	Item No.	Item No.
6 - 1/4	DL 625 AT	DL 625 ATG	DL 625 ATGB


Length = 2.5 m - 8' 2-1/2"	Satin copper anod. alu. (AK)	Polished copper anod. alu. (AKG)	Brushed copper anod. alu. (AKGB)
H = mm - in.	Item No.	Item No.	Item No.
6 - 1/4	DL 625 AK	DL 625 AKG	DL 625 AKGB

Length = 2.5 m - 8' 2-1/2"	Satin brass anod. alu. (AM)	Polished brass anod. alu. (AMG)	Brushed brass anod. alu. (AMGB)
H = mm - in.	Item No.	Item No.	Item No.
6 - 1/4	DL 625 AM	DL 625 AMG	DL 625 AMGB

**Note:** All corresponding item numbers of the RONDEC finishes match DESIGNLINE.



Aluminum

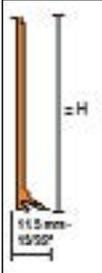

Length = 2.5 m - 8' 2-1/2"		Satin anodized aluminum (AE)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	
60 - 2-3/8	DB SL 60 AE	ED / DB SL 60 AE	ID / DB SL 60 AE	
80 - 3-1/8	DB SL 80 AE	ED / DB SL 80 AE	ID / DB SL 80 AE	

H = mm - in.	End cap (left)	End cap (right)	Connector	
60 - 2-3/8	EL / DB SL 60 AE	ER / DB SL 60 AE	V / DB SL 60 AE	
80 - 3-1/8	EL / DB SL 80 AE	ER / DB SL 80 AE	V / DB SL 80 AE	

Length = 2.5 m - 8' 2-1/2"		Anodized aluminum with brushed stainless steel appearance (AEEB)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	
60 - 2-3/8	DB SL 60 AEEB	ED / DB SL 60 AEEB	ID / DB SL 60 AEEB	
80 - 3-1/8	DB SL 80 AEEB	ED / DB SL 80 AEEB	ID / DB SL 80 AEEB	


H = mm - in.	End cap (left)	End cap (right)	Connector	
60 - 2-3/8	EL / DB SL 60 AEEB	ER / DB SL 60 AEEB	V / DB SL 60 AEEB	
80 - 3-1/8	EL / DB SL 80 AEEB	ER / DB SL 80 AEEB	V / DB SL 80 AEEB	

**Note:** For reasons associated with production technology, inside corners ID / DB SL 60 AEEB and ID / DB SL 80 AEEB are not brushed.

Length = 2.5 m - 8' 2-1/2"		Matte white color-coated aluminum (MBW)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°	
60 - 2-3/8	DB SL 60 MBW	ED / DB SL 60 MBW	ID / DB SL 60 MBW	
80 - 3-1/8	DB SL 80 MBW	ED / DB SL 80 MBW	ID / DB SL 80 MBW	

H = mm - in.	End cap (left)	End cap (right)	Connector	
60 - 2-3/8	EL / DB SL 60 MBW	ER / DB SL 60 MBW	V / DB SL 60 MBW	
80 - 3-1/8	EL / DB SL 80 MBW	ER / DB SL 80 MBW	V / DB SL 80 MBW	

Length = 2.5 m - 8' 2-1/2"		Schluter®-DESIGNBASE-SLZ
Sealing lip		
DB ZS LL		

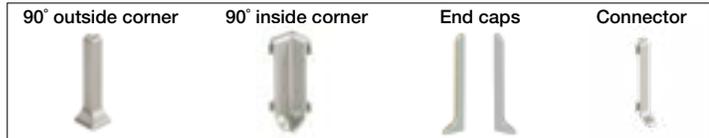


Sealing lip






Stainless steel

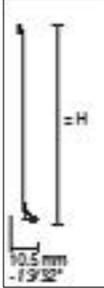


<b>Schluter®-DESIGNBASE-SL-E</b>			
Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°
110 - 4-3/8	DB SL 110 EB	E90 / DB SL 110 EB	I90 / DB SL 110 EB
160 - 6-3/8	DB SL 160 EB	E90 / DB SL 160 EB	I90 / DB SL 160 EB


H = mm - in.	End cap (left)	End cap (right)	Connector
110 - 4-3/8	EL / DB SL 110 EB	ER / DB SL 110 EB	V / DB SL 110 EB
160 - 6-3/8	EL / DB SL 160 EB	ER / DB SL 160 EB	V / DB SL 160 EB

Length = 2.5 m - 8' 2-1/2"	Schluter®-DESIGNBASE-SLZ-E
Sealing lip	
DB ZS LL E	

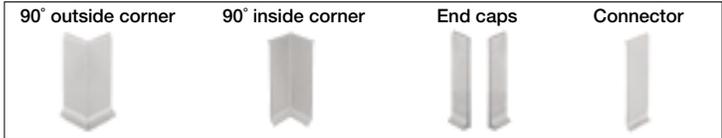

Sealing lip

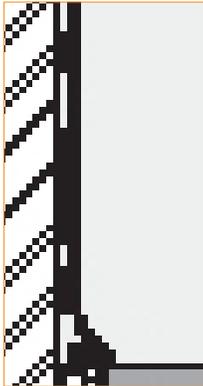





<b>Schluter®-DECO-DE</b>		
Length = 2.5 m - 8' 2-1/2"	<b>Stainless steel 304 (1.4301 = V2A) (E)</b>	<b>Brushed stainless steel 304 (1.4301 = V2A) (EB)</b>
<b>H = mm - in.</b>	<b>Item No.</b>	<b>Item No.</b>
8 - 5/16	DE 80 ES	DE 80 EBS
10 - 3/8	DE 100 ES	DE 100 EBS
11 - 7/16	DE 110 ES	DE 110 EBS
12.5 - 1/2	DE 125 ES	DE 125 EBS




Aluminum




Stainless steel





<b>Schluter®-DECO-SG</b>			
Length = 2.5 m - 8' 2-1/2"	<b>Brushed stainless steel 304 (1.4301 = V2A) (EB)</b>	<b>Satin anodized aluminum (AE)</b>	<b>Bright chrome anodized aluminum (ACB)</b>
<b>H = mm - in.</b>	<b>Item No.</b>	<b>Item No.</b>	<b>Item No.</b>
<b>W: 12.5 mm - 1/2"</b>			
8 - 5/16	SG 80 EB 12	SG 80 AE 12	SG 80 ACB 12
10 - 3/8	SG 100 EB 12	SG 100 AE 12	SG 100 ACB 12
11 - 7/16	SG 110 EB 12	SG 110 AE 12	SG 110 ACB 12
12.5 - 1/2	SG 125 EB 12	SG 125 AE 12	SG 125 ACB 12
<b>W: 15 mm - 9/16"</b>			
8 - 5/16	SG 80 EB 15	SG 80 AE 15	SG 80 ACB 15
10 - 3/8	SG 100 EB 15	SG 100 AE 15	SG 100 ACB 15
11 - 7/16	SG 110 EB 15	SG 110 AE 15	SG 110 ACB 15
12.5 - 1/2	SG 125 EB 15	SG 125 AE 15	SG 125 ACB 15




<b>Schluter®-DECO-SGC</b>	
Length = 2.5 m - 8' 2-1/2"	<b>Satin anodized aluminum (AE)</b>
<b>H = mm - in.</b>	<b>Item No.</b>
<b>W: 12.5 mm - 1/2"</b>	
8 - 5/16	SGC 80 AE 12
10 - 3/8	SGC 100 AE 12
11 - 7/16	SGC 110 AE 12
12.5 - 1/2	SGC 125 AE 12
<b>W: 15 mm - 9/16"</b>	
8 - 5/16	SGC 80 AE 15
10 - 3/8	SGC 100 AE 15
11 - 7/16	SGC 110 AE 15
12.5 - 1/2	SGC 125 AE 15




<b>Schluter®-ECK-E</b>		
H = mm - in.	Stainless steel 304 (1.4301 = V2A) (E)	Brushed stainless steel 304 (1.4301 = V2A) (EB)
	Item No.	Item No.
<b>90° Angle</b>		
Length = 1.50 m - 4' 11"		
6 - 1/4	E37 V2A 60/150	E37 V2A EB 60/150
8 - 5/16	E37 V2A 80/150	E37 V2A EB 80/150
11 - 7/16	E37 V2A 110/150	E37 V2A EB 110/150
Length = 2.00 m - 6' 7"		
6 - 1/4	E37 V2A 60/200	E37 V2A EB 60/200
8 - 5/16	E37 V2A 80/200	E37 V2A EB 80/200
11 - 7/16	E37 V2A 110/200	E37 V2A EB 110/200
Length = 2.5 m - 8' 2-1/2"		
6 - 1/4	E37 V2A 60/250	E37 V2A EB 60/250
8 - 5/16	E37 V2A 80/250	E37 V2A EB 80/250
11 - 7/16	E37 V2A 110/250	E37 V2A EB 110/250
Length = 3.00 m - 9' 10"		
6 - 1/4	E37 V2A 60/300	E37 V2A EB 60/300
8 - 5/16	E37 V2A 80/300	E37 V2A EB 80/300
11 - 7/16	E37 V2A 110/300	E37 V2A EB 110/300
<b>135° Angle</b>		
Length = 2.5 m - 8' 2-1/2"		
6 - 1/4	E37 E 60S	E37 EB 60S
8 - 5/16	E37 E 80S	E37 EB 80S
11 - 7/16	E37 E 110S	E37 EB 110S
Length = 3.00 m - 9' 10"		
6 - 1/4	E37 E 60S/300	E37 EB 60S/300
8 - 5/16	E37 E 80S/300	E37 EB 80S/300
11 - 7/16	E37 E 110S/300	E37 EB 110S/300



<b>Schluter®-ECK-K</b>		
W = mm - in.	Stainless steel 304 (1.4301 = V2A) (E)	Brushed stainless steel 304 (1.4301 = V2A) (EB)
	Item No.	Item No.
<b>90° Angle</b>		
Length = 1.50 m - 4' 11"		
15 - 9/16	K15 V2A/150	K15 V2A EB/150
32 - 1-9/32	K32 V2A/150	K32 V2A EB/150
50 - 2	K50 V2A/150	K50 V2A EB/150
Length = 2.00 m - 6' 7"		
32 - 1-9/32	K32 V2A/200	K32 V2A EB/200
50 - 2	K50 V2A/200	K50 V2A EB/200
Length = 2.5 m - 8' 2-1/2"		
15 - 9/16	K15 V2A/250	K15 V2A EB/250
32 - 1-9/32	K32 V2A/250	K32 V2A EB/250
50 - 2	K50 V2A/250	K50 V2A EB/250
Length = 3.00 m - 9' 10"		
15 - 9/16	K15 V2A/300	K15 V2A EB/300
32 - 1-9/32	K32 V2A/300	K32 V2A EB/300
50 - 2	K50 V2A/300	K50 V2A EB/300
<b>135° Angle</b>		
Length = 1.50 m - 4' 11"		
32 - 1-9/32	K32 ES/150	
Length = 2.5 m - 8' 2-1/2"		
32 - 1-9/32	K32 ES	
Length = 3.00 m - 9' 10"		
32 - 1-9/32	K32 ES/300	






Schluter®-ECK-KI		
W = mm - in.	Stainless steel 304 (1.4301 = V2A) (E)	Brushed stainless steel 304 (1.4301 = V2A) (EB)
	Item No.	Item No.
Length = 1.50 m - 4' 11"		
15 - 9/16	KI15 E/150	KI15 EB/150
Length = 2.00 m - 6' 7"		
15 - 9/16	KI15 E/200	KI15 EB/200
Length = 2.5 m - 8' 2-1/2"		
15 - 9/16	KI15 E	KI15 EB
Length = 3.00 m - 9' 10"		
15 - 9/16	KI15 E/300	KI15 EB/300



Schluter®-ECK-KHK				
Stainless steel 304 (1.4301 = V2A) (E)				
W = mm - in.	Profile	Outside corner, 90°	Inside corner, 90° (2-way)	Inside corner, 90° (3-way)
Length = 1.50 m - 4' 11"		E/KHK 15 E	1/2KHK 15 E	1/3KHK 15 E
15 - 9/16	KHK 15 E/150			
Length = 2.00 m - 6' 7"				
15 - 9/16	KHK 15 E/200			
Length = 2.5 m - 8' 2-1/2"				
15 - 9/16	KHK 15 E			
Length = 3.00 m - 9' 10"		V/KHK 15 E		
15 - 9/16	KHK 15 E/300	Connector		

Brushed stainless steel 304 (1.4301 = V2A) (EB)				
W = mm - in.	Profile	Outside corner, 90°	Inside corner, 90° (2-way)	Inside corner, 90° (3-way)
Length = 1.50 m - 4' 11"		E/KHK 15 EB	1/2KHK 15 EB	1/3KHK 15 EB
15 - 9/16	KHK 15 EB/150			
Length = 2.00 m - 6' 7"				
15 - 9/16	KHK 15 EB/200			
Length = 2.5 m - 8' 2-1/2"				
15 - 9/16	KHK 15 EB			
Length = 3.00 m - 9' 10"		V/KHK 15 EB		
15 - 9/16	KHK 15 EB/300	Connector		





<b>Schluter®-RONDEC-STEP</b>						
Length = 2.5 m - 8' 2-1/2"		Satin anodized aluminum (AE)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
<b>A: 39 mm - 1-1/2"</b>						
8 - 5/16	RS 80 AE 39	E90 RS 80 AE 39	E135 RS 80 AE 39	I90 RS 80 AE 39	I135 RS 80 AE 39	
10 - 3/8	RS 100 AE 39	E90 RS 100 AE 39	E135 RS 100 AE 39	I90 RS 100 AE 39	I135 RS 100 AE 39	
12.5 - 1/2	RS 125 AE 39	E90 RS 125 AE 39	E135 RS 125 AE 39	I90 RS 125 AE 39	I135 RS 125 AE 39	
<b>A: 57 mm - 2-1/4"</b>						
8 - 5/16	RS 80 AE 57	E90 RS 80 AE 57	E135 RS 80 AE 57	I90 RS 80 AE 57	I135 RS 80 AE 57	
10 - 3/8	RS 100 AE 57	E90 RS 100 AE 57	E135 RS 100 AE 57	I90 RS 100 AE 57	I135 RS 100 AE 57	
12.5 - 1/2	RS 125 AE 57	E90 RS 125 AE 57	E135 RS 125 AE 57	I90 RS 125 AE 57	I135 RS 125 AE 57	

Length = 2.5 m - 8' 2-1/2"		Brushed chrome anodized aluminum (ACGB)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
<b>A: 39 mm - 1-1/2"</b>						
8 - 5/16	RS 80 ACGB 39	E90 RS 80 ACGB 39	E135 RS 80 ACGB 39	I90 RS 80 ACGB 39	I135 RS 80 ACGB 39	
10 - 3/8	RS 100 ACGB 39	E90 RS 100 ACGB 39	E135 RS 100 ACGB 39	I90 RS 100 ACGB 39	I135 RS 100 ACGB 39	
12.5 - 1/2	RS 125 ACGB 39	E90 RS 125 ACGB 39	E135 RS 125 ACGB 39	I90 RS 125 ACGB 39	I135 RS 125 ACGB 39	
<b>A: 57 mm - 2-1/4"</b>						
8 - 5/16	RS 80 ACGB 57	E90 RS 80 ACGB 57	E135 RS 80 ACGB 57	I90 RS 80 ACGB 57	I135 RS 80 ACGB 57	
10 - 3/8	RS 100 ACGB 57	E90 RS 100 ACGB 57	E135 RS 100 ACGB 57	I90 RS 100 ACGB 57	I135 RS 100 ACGB 57	
12.5 - 1/2	RS 125 ACGB 57	E90 RS 125 ACGB 57	E135 RS 125 ACGB 57	I90 RS 125 ACGB 57	I135 RS 125 ACGB 57	

Length = 2.5 m - 8' 2-1/2"		Satin nickel anodized aluminum (AT)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
<b>A: 39 mm - 1-1/2"</b>						
8 - 5/16	RS 80 AT 39	E90 RS 80 AT 39	E135 RS 80 AT 39	I90 RS 80 AT 39	I135 RS 80 AT 39	
10 - 3/8	RS 100 AT 39	E90 RS 100 AT 39	E135 RS 100 AT 39	I90 RS 100 AT 39	I135 RS 100 AT 39	
12.5 - 1/2	RS 125 AT 39	E90 RS 125 AT 39	E135 RS 125 AT 39	I90 RS 125 AT 39	I135 RS 125 AT 39	
<b>A: 57 mm - 2-1/4"</b>						
8 - 5/16	RS 80 AT 57	E90 RS 80 AT 57	E135 RS 80 AT 57	I90 RS 80 AT 57	I135 RS 80 AT 57	
10 - 3/8	RS 100 AT 57	E90 RS 100 AT 57	E135 RS 100 AT 57	I90 RS 100 AT 57	I135 RS 100 AT 57	
12.5 - 1/2	RS 125 AT 57	E90 RS 125 AT 57	E135 RS 125 AT 57	I90 RS 125 AT 57	I135 RS 125 AT 57	

<b>Schluter®-RONDEC-STEP</b>						
Length = 2.5 m - 8' 2-1/2"		Brushed nickel anodized aluminum (ATGB)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
<b>A: 39 mm - 1-1/2"</b>						
8 - 5/16	RS 80 ATGB 39	E90 RS 80 ATGB 39	E135 RS 80 ATGB 39	I90 RS 80 ATGB 39	I135 RS 80 ATGB 39	
10 - 3/8	RS 100 ATGB 39	E90 RS 100 ATGB 39	E135 RS 100 ATGB 39	I90 RS 100 ATGB 39	I135 RS 100 ATGB 39	
12.5 - 1/2	RS 125 ATGB 39	E90 RS 125 ATGB 39	E135 RS 125 ATGB 39	I90 RS 125 ATGB 39	I135 RS 125 ATGB 39	

Length = 2.5 m - 8' 2-1/2"		Satin copper anodized aluminum (AK)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
<b>A: 39 mm - 1-1/2"</b>						
8 - 5/16	RS 80 AK 39	E90 RS 80 AK 39	E135 RS 80 AK 39	I90 RS 80 AK 39	I135 RS 80 AK 39	
10 - 3/8	RS 100 AK 39	E90 RS 100 AK 39	E135 RS 100 AK 39	I90 RS 100 AK 39	I135 RS 100 AK 39	
12.5 - 1/2	RS 125 AK 39	E90 RS 125 AK 39	E135 RS 125 AK 39	I90 RS 125 AK 39	I135 RS 125 AK 39	
<b>A: 57 mm - 2-1/4"</b>						
8 - 5/16	RS 80 AK 57	E90 RS 80 AK 57	E135 RS 80 AK 57	I90 RS 80 AK 57	I135 RS 80 AK 57	
10 - 3/8	RS 100 AK 57	E90 RS 100 AK 57	E135 RS 100 AK 57	I90 RS 100 AK 57	I135 RS 100 AK 57	
12.5 - 1/2	RS 125 AK 57	E90 RS 125 AK 57	E135 RS 125 AK 57	I90 RS 125 AK 57	I135 RS 125 AK 57	





Length = 2.5 m - 8' 2-1/2"		Brushed copper anodized aluminum (AKGB)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
<b>A: 39 mm - 1-1/2"</b>						
8 - 5/16	RS 80 AKGB 39	E90 RS 80 AKGB 39	E135 RS 80 AKGB 39	I90 RS 80 AKGB 39	I135 RS 80 AKGB 39	
10 - 3/8	RS 100 AKGB 39	E90 RS 100 AKGB 39	E135 RS 100 AKGB 39	I90 RS 100 AKGB 39	I135 RS 100 AKGB 39	
12.5 - 1/2	RS 125 AKGB 39	E90 RS 125 AKGB 39	E135 RS 125 AKGB 39	I90 RS 125 AKGB 39	I135 RS 125 AKGB 39	
<b>A: 57 mm - 2-1/4"</b>						
8 - 5/16	RS 80 AKGB 57	E90 RS 80 AKGB 57	E135 RS 80 AKGB 57	I90 RS 80 AKGB 57	I135 RS 80 AKGB 57	
10 - 3/8	RS 100 AKGB 57	E90 RS 100 AKGB 57	E135 RS 100 AKGB 57	I90 RS 100 AKGB 57	I135 RS 100 AKGB 57	
12.5 - 1/2	RS 125 AKGB 57	E90 RS 125 AKGB 57	E135 RS 125 AKGB 57	I90 RS 125 AKGB 57	I135 RS 125 AKGB 57	

Length = 2.5 m - 8' 2-1/2"		Satin brass anodized aluminum (AM)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
<b>A: 57 mm - 2-1/4"</b>						
8 - 5/16	RS 80 AM 57	E90 RS 80 AM 57	E135 RS 80 AM 57	I90 RS 80 AM 57	I135 RS 80 AM 57	
10 - 3/8	RS 100 AM 57	E90 RS 100 AM 57	E135 RS 100 AM 57	I90 RS 100 AM 57	I135 RS 100 AM 57	
12.5 - 1/2	RS 125 AM 57	E90 RS 125 AM 57	E135 RS 125 AM 57	I90 RS 125 AM 57	I135 RS 125 AM 57	

Length = 2.5 m - 8' 2-1/2"		Brushed brass anodized aluminum (AMGB)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
<b>A: 39 mm - 1-1/2"</b>						
8 - 5/16	RS 80 AMGB 39	E90 RS 80 AMGB 39	E135 RS 80 AMGB 39	I90 RS 80 AMGB 39	I135 RS 80 AMGB 39	
10 - 3/8	RS 100 AMGB 39	E90 RS 100 AMGB 39	E135 RS 100 AMGB 39	I90 RS 100 AMGB 39	I135 RS 100 AMGB 39	
12.5 - 1/2	RS 125 AMGB 39	E90 RS 125 AMGB 39	E135 RS 125 AMGB 39	I90 RS 125 AMGB 39	I135 RS 125 AMGB 39	
<b>A: 57 mm - 2-1/4"</b>						
8 - 5/16	RS 80 AMGB 57	E90 RS 80 AMGB 57	E135 RS 80 AMGB 57	I90 RS 80 AMGB 57	I135 RS 80 AMGB 57	
10 - 3/8	RS 100 AMGB 57	E90 RS 100 AMGB 57	E135 RS 100 AMGB 57	I90 RS 100 AMGB 57	I135 RS 100 AMGB 57	
12.5 - 1/2	RS 125 AMGB 57	E90 RS 125 AMGB 57	E135 RS 125 AMGB 57	I90 RS 125 AMGB 57	I135 RS 125 AMGB 57	

<b>Schluter®-RONDEC-STEP</b>						
Length = 2.5 m - 8' 2-1/2"		Brushed antique bronze anodized aluminum (ABGB)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
<b>A: 39 mm - 1-1/2"</b>						
8 - 5/16	RS 80 ABGB 39	E90 RS 80 ABGB 39	E135 RS 80 ABGB 39	I90 RS 80 ABGB 39	I135 RS 80 ABGB 39	
10 - 3/8	RS 100 ABGB 39	E90 RS 100 ABGB 39	E135 RS 100 ABGB 39	I90 RS 100 ABGB 39	I135 RS 100 ABGB 39	
12.5 - 1/2	RS 125 ABGB 39	E90 RS 125 ABGB 39	E135 RS 125 ABGB 39	I90 RS 125 ABGB 39	I135 RS 125 ABGB 39	





Schluter®-RONDEC-CT						
Length = 2.5 m - 8' 2-1/2"		Satin anodized aluminum (AE)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
8 - 5/16	RC 80 AE 39	E90 RC 80 AE 39	E135 RC 80 AE 39	I90 RC 80 AE 39	I135 RC 80 AE 39	
10 - 3/8	RC 100 AE 39	E90 RC 100 AE 39	E135 RC 100 AE 39	I90 RC 100 AE 39	I135 RC 100 AE 39	
12.5 - 1/2	RC 125 AE 39	E90 RC 125 AE 39	E135 RC 125 AE 39	I90 RC 125 AE 39	I135 RC 125 AE 39	

Length = 2.5 m - 8' 2-1/2"		Brushed chrome anodized aluminum (ACGB)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
8 - 5/16	RC 80 ACGB 39	E90 RC 80 ACGB 39	E135 RC 80 ACGB 39	I90 RC 80 ACGB 39	I135 RC 80 ACGB 39	
10 - 3/8	RC 100 ACGB 39	E90 RC 100 ACGB 39	E135 RC 100 ACGB 39	I90 RC 100 ACGB 39	I135 RC 100 ACGB 39	
12.5 - 1/2	RC 125 ACGB 39	E90 RC 125 ACGB 39	E135 RC 125 ACGB 39	I90 RC 125 ACGB 39	I135 RC 125 ACGB 39	

Length = 2.5 m - 8' 2-1/2"		Satin nickel anodized aluminum (AT)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
8 - 5/16	RC 80 AT 39	E90 RC 80 AT 39	E135 RC 80 AT 39	I90 RC 80 AT 39	I135 RC 80 AT 39	
10 - 3/8	RC 100 AT 39	E90 RC 100 AT 39	E135 RC 100 AT 39	I90 RC 100 AT 39	I135 RC 100 AT 39	
12.5 - 1/2	RC 125 AT 39	E90 RC 125 AT 39	E135 RC 125 AT 39	I90 RC 125 AT 39	I135 RC 125 AT 39	

Length = 2.5 m - 8' 2-1/2"		Brushed nickel anodized aluminum (ATGB)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
8 - 5/16	RC 80 ATGB 39	E90 RC 80 ATGB 39	E135 RC 80 ATGB 39	I90 RC 80 ATGB 39	I135 RC 80 ATGB 39	
10 - 3/8	RC 100 ATGB 39	E90 RC 100 ATGB 39	E135 RC 100 ATGB 39	I90 RC 100 ATGB 39	I135 RC 100 ATGB 39	
12.5 - 1/2	RC 125 ATGB 39	E90 RC 125 ATGB 39	E135 RC 125 ATGB 39	I90 RC 125 ATGB 39	I135 RC 125 ATGB 39	

Length = 2.5 m - 8' 2-1/2"		Satin copper anodized aluminum (AK)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
8 - 5/16	RC 80 AK 39	E90 RC 80 AK 39	E135 RC 80 AK 39	I90 RC 80 AK 39	I135 RC 80 AK 39	
10 - 3/8	RC 100 AK 39	E90 RC 100 AK 39	E135 RC 100 AK 39	I90 RC 100 AK 39	I135 RC 100 AK 39	
12.5 - 1/2	RC 125 AK 39	E90 RC 125 AK 39	E135 RC 125 AK 39	I90 RC 125 AK 39	I135 RC 125 AK 39	

Length = 2.5 m - 8' 2-1/2"		Brushed copper anodized aluminum (AKGB)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
8 - 5/16	RC 80 AKGB 39	E90 RC 80 AKGB 39	E135 RC 80 AKGB 39	I90 RC 80 AKGB 39	I135 RC 80 AKGB 39	
10 - 3/8	RC 100 AKGB 39	E90 RC 100 AKGB 39	E135 RC 100 AKGB 39	I90 RC 100 AKGB 39	I135 RC 100 AKGB 39	
12.5 - 1/2	RC 125 AKGB 39	E90 RC 125 AKGB 39	E135 RC 125 AKGB 39	I90 RC 125 AKGB 39	I135 RC 125 AKGB 39	

Length = 2.5 m - 8' 2-1/2"		Satin brass anodized aluminum (AM)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
8 - 5/16	RC 80 AM 39	E90 RC 80 AM 39	E135 RC 80 AM 39	I90 RC 80 AM 39	I135 RC 80 AM 39	
10 - 3/8	RC 100 AM 39	E90 RC 100 AM 39	E135 RC 100 AM 39	I90 RC 100 AM 39	I135 RC 100 AM 39	
12.5 - 1/2	RC 125 AM 39	E90 RC 125 AM 39	E135 RC 125 AM 39	I90 RC 125 AM 39	I135 RC 125 AM 39	

Length = 2.5 m - 8' 2-1/2"		Brushed brass anodized aluminum (AMGB)				
H = mm - in.	Profile	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
8 - 5/16	RC 80 AMGB 39	E90 RC 80 AMGB 39	E135 RC 80 AMGB 39	I90 RC 80 AMGB 39	I135 RC 80 AMGB 39	
10 - 3/8	RC 100 AMGB 39	E90 RC 100 AMGB 39	E135 RC 100 AMGB 39	I90 RC 100 AMGB 39	I135 RC 100 AMGB 39	
12.5 - 1/2	RC 125 AMGB 39	E90 RC 125 AMGB 39	E135 RC 125 AMGB 39	I90 RC 125 AMGB 39	I135 RC 125 AMGB 39	



**Schluter®-TRENDLINE** Textured Color-coated Aluminum





Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum (TS)	
H = mm - in.	Profile	
8 - 5/16	RC 80	+ color* 39
10 - 3/8	RC 100	+ color* 39
12.5 - 1/2	RC 125	+ color* 39

**\*Color Codes**



\* To complete the item number, add the color code (e.g., RC 80 **TSB** 39).

Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum (TS)				
H = mm - in.	Outside corner, 90°	Outside corner, 135°	Inside corner, 90°	Inside corner, 135°	
8 - 5/16	E90 RC 80 + color* 39	E135 RC 80 + color* 39	I90 RC 80 + color* 39	I135 RC 80 + color* 39	
10 - 3/8	E90 RC 100 + color* 39	E135 RC 100 + color* 39	I90 RC 100 + color* 39	I135 RC 100 + color* 39	
12.5 - 1/2	E90 RC 125 + color* 39	E135 RC 125 + color* 39	I90 RC 125 + color* 39	I135 RC 125 + color* 39	



<b>Schluter®-SCHIENE-STEP</b>						
Length = 2.5 m - 8' 2-1/2"	Brushed Stainless Steel 304 (1.4301 = V2A) (EB)					
H = mm - in.	Profile	Inside corner, 90°	Inside corner, 135°	Outside corner, 90° and End Cap	Outside corner, 135°	
<b>A: 39 mm - 1-1/2"</b>						
6 - 1/4	SS 60 EB 39	I90 / SS 60 EB 39	I135 / SS 60 EB 39	E90 / SS 60 EB 39	E135 / SS 60 EB 39	
9 - 11/32	SS 90 EB 39	I90 / SS 90 EB 39	I135 / SS 90 EB 39	E90 / SS 90 EB 39	E135 / SS 90 EB 39	
11 - 7/16	SS 110 EB 39	I90 / SS 110 EB 39	I135 / SS 110 EB 39	E90 / SS 110 EB 39	E135 / SS 110 EB 39	
12.5 - 1/2	SS 125 EB 39	I90 / SS 125 EB 39	I135 / SS 125 EB 39	E90 / SS 125 EB 39	E135 / SS 125 EB 39	
<b>A: 30 mm - 1-3/16"</b>						
9 - 11/32	SS 90 EB 30	-	-	E90 / SS 90 EB 30	-	
11 - 7/16	SS 110 EB 30	-	-	E90 / SS 110 EB 30	-	
12.5 - 1/2	SS 125 EB 30	-	-	E90 / SS 125 EB 30	-	
<b>A: 11 mm - 7/16"</b>						
6 - 1/4	SS 60 EB 11					
12.5 - 1/2	SS 125 EB 11					

Brushed Stainless Steel 304 (1.4301 = V2A) (EB)	
H = mm - in.	Connector
<b>A: 39 mm - 1-1/2"</b>	
6 - 1/4	V / SS 60 EB 39
9 - 11/32	V / SS 90 EB 39
11 - 7/16	V / SS 110 EB 39
12.5 - 1/2	V / SS 125 EB 39
<b>A: 30 mm - 1-3/16"</b>	
9 - 11/32	V / SS 90 EB 30
11 - 7/16	V / SS 110 EB 30
12.5 - 1/2	V / SS 125 EB 30
<b>A: 11 mm - 7/16"</b>	
6 - 1/4	V / SS 60 EB 11
12.5 - 1/2	V / SS 125 EB 11

# Schluter® Systems Wall and Countertop Profiles 5-Year Limited Warranty

**LIMITED WARRANTY COVERAGE:** Subject to the conditions and limitations as stated in this **Schluter® Systems Wall and Countertop Profiles 5-Year Limited Warranty** (the "**Limited Warranty**"), Schluter Systems warrants that its Schluter®-JOLLY, Schluter®-JOLLY-P, Schluter®-DESIGNBASE-SL, Schluter®-RONDEC-DB, Schluter®-QUADEC, Schluter®-QUADEC-K, Schluter®-QUADEC-FS, Schluter®-RONDEC, Schluter®-FINEC, Schluter®-DESIGNLINE, Schluter®-DECO-DE, Schluter®-ECK-E, Schluter®-RONDEC-STEP, Schluter®-DECO-SG, Schluter®-DECO-SGC, Schluter®-ECK-K, Schluter®-RONDEC-CT, Schluter®-INDEC, Schluter®-ECK-KI, Schluter®-ECK-KHK, Schluter®-SCHIENESTEP, and Schluter®-REMA (collectively, the "**Products**") will be free from manufacturing defects and will perform as described in the Schluter Systems Wall and Countertop Profiles Technical Data Sheet (collectively, the "**Written Materials**") for a period of five (5) years from the date of purchase when installed and used in accordance with the terms and conditions of the Written Materials and industry standard guidelines that are not in conflict with the Written Materials in effect at the time of installation.

For the purposes of this Limited Warranty, "**Owner**" is defined as the original end user of the property in which the Products are installed; and "**Tile Assembly**" is defined to include the Products, non-reusable tile surfaces, and applicable setting and grouting materials.

This Limited Warranty is only applicable to installations in the United States of America and Canada. Schluter Systems is not responsible or liable under any circumstances for determining the suitability of the Products for the Owner's intended purpose. It is the responsibility of the Owner to consult with an experienced and professional installer to ensure the suitability of the Products, subfloor/substrate and all building materials in the installation and that the Written Materials are followed properly.

**RESOLUTION:** If the Products are installed and used in accordance with the terms and conditions as described hereinabove and such Products are proven defective within the applicable warranty term, the Owner's exclusive remedy and the sole obligation of Schluter Systems, at its election, shall be to (a) reinstall or replace the failed portion of the Tile Assembly or (b) pay an amount not to exceed the original square foot cost of the installation of the Tile Assembly verified to be defective. Due to conditions beyond the control of Schluter Systems (e.g., color and shade availability, discontinuation, normal wear and tear), Schluter Systems cannot guarantee or warrant an exact match to the specific tile, stone, or other flooring materials used in the original installation. In such event, substantially similar materials may be substituted.

**EXCLUSIONS FROM COVERAGE:** This Limited Warranty excludes and in no event shall Schluter Systems have any liability for any indirect, special, incidental, punitive, exemplary, or consequential damages, including lost profits, arising out of or otherwise connected to the failure of the Products or Tile Assembly, regardless of any strict liability or active or passive negligence of Schluter Systems, and regardless of legal theory, whether in contract, tort, extra-contractual or other. This Limited Warranty further excludes any loss or damage arising out of or otherwise connected to: acts of war, terrorism, fire, explosion, natural disaster, acts of God, any failure to comply with the Written Materials, inadequate subfloor/substrate, improper preparation or other failure of subfloor/substrate, faulty or negligent penetration of the Products or subfloor/substrate, intentional acts of destruction, structural failure, misuse of or failure to maintain the Products, normal wear and tear, scratches, dents, corrosion or discoloration (whether caused by excessive heat, chemical cleaning products, abrasive agents or otherwise), efflorescence and shading which are a natural occurrence with cementitious materials and are not considered a defective condition for the purposes of this Limited Warranty, variations of texture, color or shade from those on product samples, packaging materials or other marketing materials, or other causes unrelated to the Products (e.g. tile covering failure, excess point loading, overvoltage). This Limited Warranty excludes exterior applications and applications utilizing glass tile or other non-approved tile surfaces, unless specifically approved in writing on a case by case basis by the Schluter Systems Technical Services Director.

This Limited Warranty is conditioned and will be considered null and void and Schluter Systems will have the right to refuse any claims if: (a) the Products have been improperly stored or installed, or (b) the Products are subject to abusive or abnormal use, lack of maintenance, or used in a manner other than that for which the Products were designed or in any way contrary to the Written Materials.

**DISCLAIMER:** There are no warranties beyond this expressed warranty as stated herein. To the extent permitted by law, all other warranties, representations or conditions, expressed or implied, are hereby disclaimed and excluded, including but not limited to the implied warranties of **MERCHANTABILITY** or **FITNESS FOR A PARTICULAR PURPOSE** (as limited to such purposes as described in the Written Materials) or arising from a course of dealing, usage of trade or otherwise by law. ANY IMPLIED WARRANTIES ARISING BY OPERATION OF LAW ARE LIMITED IN DURATION TO THE TERM OF THIS LIMITED WARRANTY. NO REPRESENTATION, PROMISE, AFFIRMATION OR STATEMENT BY ANY EMPLOYEE OR AGENT OF SCHLUTER SYSTEMS WILL BE ENFORCEABLE AGAINST SCHLUTER SYSTEMS UNLESS IT IS SPECIFICALLY INCLUDED IN THIS LIMITED WARRANTY OR AUTHORIZED IN WRITING BY THE SCHLUTER SYSTEMS TECHNICAL SERVICES DIRECTOR. This Limited Warranty is given in lieu of any other warranty, whether expressed or implied. The remedies contained herein are the only remedies available for breach of this Limited Warranty. This Limited Warranty extends only to the Owner and is not transferable or assignable unless authorized by written agreement and signed by the Schluter Systems Technical Services Director or otherwise prohibited by specific state or provincial law. This Limited Warranty gives you specific legal rights; some states and provinces do not allow disclaimers or other restrictions of implied warranties; some of the above disclaimers may not apply to you. **No changes or modifications of any terms or conditions of this Limited Warranty are permitted unless duly authorized in writing by the Schluter Systems Technical Services Director.** This Limited Warranty shall supersede and replace any and all prior oral or written warranties, agreements, or other representations made by or on behalf of Schluter Systems relative to the Products or the application of the Products and shall apply to any installation occurring on or after November 1, 2022. If the Products are used in conjunction with other Schluter products, a different Schluter warranty may apply. For the most current information and materials regarding Schluter Systems warranties and programs, please visit [https://www.schluter.com/schluter-us/en\\_US/downloadfiles](https://www.schluter.com/schluter-us/en_US/downloadfiles).

**MAKING A CLAIM:** To make a claim under this Limited Warranty, the Owner must provide Schluter Systems<sup>2</sup> with written notice within thirty (30) days of any alleged defect in the Products covered by this Limited Warranty, together with date and proof of purchase of such Products and/or all of its components and name and address of all installers and all invoices related to the original installation, failing which this Limited Warranty shall have no legal effect<sup>3</sup>. Schluter Systems reserves the right at its election and as a condition of this Limited Warranty to inspect the alleged failed and/or defective Products.

All U.S. Claims shall be sent to:

Schluter Systems L.P.  
Attn: Warranty Claims Dept.  
194 Pleasant Ridge Road  
Plattsburgh, NY 12901-5841

All Canadian Claims shall be sent to:

Schluter Systems (Canada), Inc.  
Attn: Warranty Claims Dept.  
21100 chemin Ste-Marie  
Ste-Anne-de-Bellevue, QC H9X 3Y8

<sup>1</sup> If there are any conflicting terms between any Written Materials, the most recently updated document shall be deemed to control.

<sup>2</sup> This Limited Warranty is limited to sales of the Products made in and intended for use in the United States and Canada. For the purposes of this Limited Warranty, Schluter Systems L.P. shall offer warranty coverage to Owners located in the United States, and Schluter Systems (Canada) Inc. shall offer warranty coverage to Owners located in Canada.

<sup>3</sup> In the event that Owner fails to provide such required invoices relating to the original installation, Schluter Systems shall pay Owner an amount equal to the average, reasonable costs of a comparable installation. If the parties fail to agree on such amount, such dispute shall promptly, and in the first instance, be submitted: (a) if a U.S. claim, to arbitration in Clinton County, New York, in accordance with the rules of the American Arbitration Association, or (b) if a Canadian claim, in the Province of Quebec, Canada, in accordance with the ADRI Arbitration Rules. Any outcome of such arbitration proceeding shall be final and binding upon the parties hereto.



Schluter Systems L.P. • 194 Pleasant Ridge Road, Plattsburgh, NY 12901-5841 • Tel.: 800-472-4588 • Fax: 800-477-9783  
Schluter Systems (Canada) Inc. • 21100 chemin Ste-Marie, Ste-Anne-de-Bellevue, QC H9X 3Y8 • Tel.: 800-667-8746 • Fax: 877-667-2410

[www.schluter.com](http://www.schluter.com)

This technical data sheet is subject to change without notice. Please visit [www.schluter.com](http://www.schluter.com) for the latest version.