




# Mapeheat<sup>TM</sup>

## Cable Guides

**Snap-Together Cable Guides for Customizable Radiant-Heated Floors**

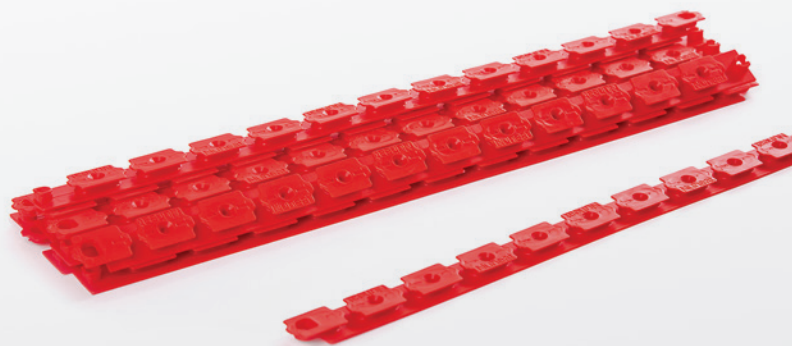

### DESCRIPTION

*Mapeheat Cable Guides* are used to secure *Mapeheat Cable* to a substrate before installation of floor-covering materials (tile, stone, laminate, engineered wood or luxury vinyl flooring). *Mapeheat Cable Guides* can be attached to a wooden subfloor with nails or screws, and to a concrete subfloor with hot glue.

Installing *Mapeheat Cable* with *Mapeheat Cable Guides* offers flexible spacing for varying watt density as follows:

- Consistent 3" (7.5 cm) spacing produces 12 W/ft<sup>2</sup> (standard output).
- Alternating spacing of 3" and 2" (7.5 and 5 cm) produces 15 W/ft<sup>2</sup> (high output), which is best for installations on a concrete slab or when heat loss is a concern.

### Product Specifications

Color	Red
Material	Plastic
Guides per pack	12
Patent	U.S. Patent D664,098

### Number of Guides Required

Cable length	Guides required (1 pack contains 12 guides)
0 to 60 ft. (0 to 18.3 m)	1 pack
60 to 120 ft. (18.3 to 36.6 m)	2 packs
121 to 190 ft. (36.9 to 57.9 m)	3 packs
190 to 260 ft. (57.9 to 79.2 m)	4 packs
260 to 340 ft. (79.2 to 104 m)	5 packs
340 to 420 ft. (104 to 128 m)	6 packs
420 to 500 ft. (128 to 152 m)	7 packs
500 to 590 ft. (152 to 180 m)	8 packs
590 to 680 ft. (180 to 207 m)	9 packs
680 to 770 ft. (207 to 235 m)	10 packs
770 to 870 ft. (235 to 265 m)	11 packs
870 to 970 ft. (265 to 296 m)	12 packs

## RELATED DOCUMENTS

*Mapeheat Cable Installation Handbook\**

\* At [www.mapei.com](http://www.mapei.com)

For information on MAPEI's commitment to sustainability and transparency, as well as how MAPEI products may contribute to green building standards and certification systems, contact [sustainability\\_USA@mapei.com](mailto:sustainability_USA@mapei.com) (USA) or [sustainability-durabilite@mapei.com](mailto:sustainability-durabilite@mapei.com) (Canada).

## LEGAL NOTICE

The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement or replace requirements per the TDS in effect at the time of the MAPEI product installation. For the most up-to-date TDS and warranty information, please visit our website at

[www.mapei.com](http://www.mapei.com). **ANY ALTERATIONS TO THE WORDING OR REQUIREMENTS CONTAINED IN OR DERIVED FROM THIS TDS SHALL VOID ALL RELATED MAPEI WARRANTIES.**

Before using, the user must determine the suitability of our products for the intended use,

and the user alone assumes all risks and liability. **ANY CLAIM SHALL BE DEEMED WAIVED UNLESS MADE IN WRITING TO US WITHIN FIFTEEN (15) DAYS FROM DATE IT WAS, OR REASONABLY SHOULD HAVE BEEN, DISCOVERED.**

We proudly support the following industry organizations:



TTMAC ACTTM



Technology from



### MAPEI Headquarters of North America

1144 East Newport Center Drive  
Deerfield Beach, Florida 33442  
1-888-US-MAPEI (1-888-876-2734) /  
(954) 246-8888

### Technical Services

1-800-992-6273 (U.S. and Puerto Rico)  
1-800-361-9309 (Canada)

### Customer Service

1-800-42-MAPEI (1-800-426-2734)

### Services in Mexico

0-1-800-MX-MAPEI (0-1-800-696-2734)

**Edition Date:** January 7, 2020

MK 3000359 (19-3054)