


# PENETRATING STONE ENHANCER

## STONE PLUS ECO

ALL NATURAL STONE

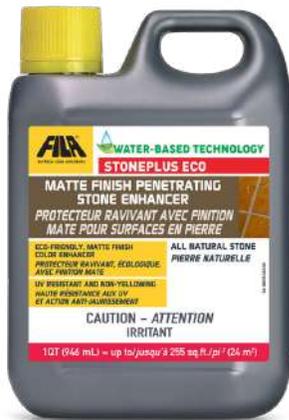

### WHAT IT'S FOR

- Enriches the color of polished, honed, textured and tumbled natural stone.
- Provides a matte finish that highlights the natural surface character.
- Protects the surface from dirt, water and oil stains.
- Enhances the stone's natural color with a matte finish.
- Excellent protection for countertops, inlays and backsplashes.
- Hides cracks on granite surfaces.

### ADVANTAGES

- Dual action: seals and enhances surfaces.
- Eco-friendly: water-based.
- Ideal for indoor and outdoor surfaces.
- Does not form a film or yellow over time.
- UV and weather resistant.
- Long lasting protection.
- Treated surfaces are safe for food contact.
- Provides very high coverage rates.
- Very low VOC emissions: contributes towards LEED credits.

### HOW TO USE IT

**READY TO USE**, no dilution necessary. Shake well before use. Apply **STONEPLUS ECO** to a clean, dry surface using a paintbrush or other suitable applicator. Rub the surface to allow the product to completely penetrate until any excess residue is wiped off. The surface may be used for normal foot traffic after 4 hours. Full cure and maximum sealer protection is achieved in 8 hours. For deeper, more intense color, apply 2-3 coats; wait no more than 10 minutes between coats. Remove any residue by rubbing the surface with a cloth soaked in **STONEPLUS ECO**. When applying the product on particularly absorbent materials, apply a larger quantity of product on the surface. On compact materials, such as polished natural stone, apply the product to sections of a few square feet at a time to facilitate removing residue.

**Caution:** Once the surface has been treated with **STONEPLUS ECO**, the treatment cannot not be reversed; the stone cannot return to its original state. Before full application, test the product on a small, inconspicuous area or loose sample to see the final color of the stone after treatment. The product does not protect marble, limestone or travertine from acid stains. Apply and leave the product to dry in a well ventilated area. When applying the product indoors, ventilate the room in order to speed up the drying process. Keep the product in a cool, dry place.

**Storage temperature:** 41° to 86° F, (5° to 30° C). Must be applied to material at temperatures between 50° to 86° F, (10° and 30°C).

■ **MATTE, COLOR ENHANCING, ECO-FRIENDLY PROTECTION.**

■ **UV RESISTANT AND NON YELLOWING.**

#### Working Properties:

Surface Traffic = 4 hours  
Full Cure = 8 hours



#### Coverage:

1 QT (0.95 L)  
**Polished stone** ›  
410 sq.ft. (38 m<sup>2</sup>)  
**Natural stone** ›  
205-259 sq.ft. (19-24 m<sup>2</sup>)

*Coverage rates are indicative and per coat.*



#### Packaging:

1 QT (946 ml) 6 plastic bottles per box

Data sheets are subject to change without notice. Revision date: September 2021.

**FILA. Because It Works.**

Fila Chemicals USA, Corp.  
Miami, FL 33172  
tel +1-305-513-0708  
filausa@filasolutions.com

TOLL FREE 1-844-FILA123



Recommended by over  
**200 INTERNATIONAL TOP BRANDS**  
manufacturers of materials for floors and wall coverings

filasolutions.com